


1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS
△					△					△	
△					△					△	
△					△					△	

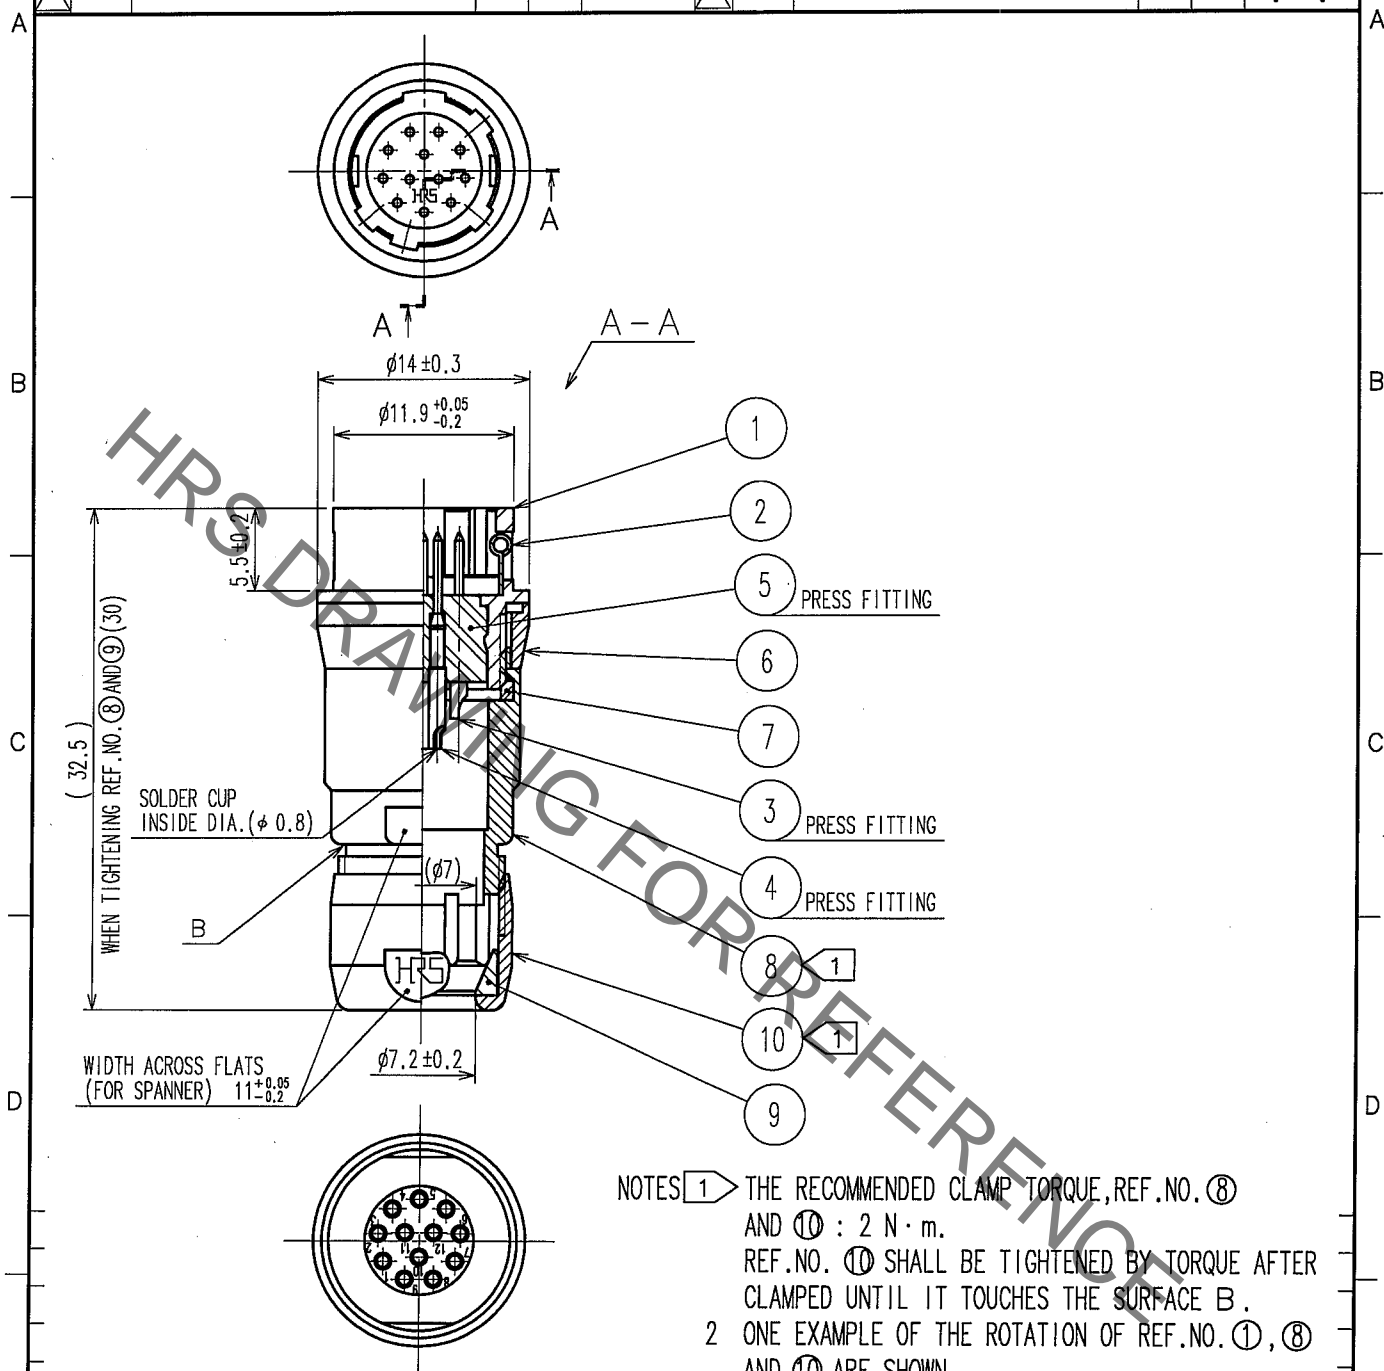

- NOTES 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑧ AND ⑩ : 2 N · m.  
REF. NO. ⑩ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.  
2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑧ AND ⑩ ARE SHOWN.

5	POLYAMIDE	(BLUE)	10	BRASS	MATTE FINISH NICKEL PLATED
4	BRASS	GOLD PLATING 0.2 μ m min. NICKEL UNDER PLATING 2 μ m min.	9	POLYAMIDE	
3	BRASS		8	BRASS	MATTE FINISH NICKEL PLATED
2	STAINLESS STEEL		7	POLYAMIDE	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	BRASS	MATTE FINISH NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN D. Matsume '05.11.19		
			DESIGNED D. Matsume '05.11.19		
			CHECKED E. Kunita '05.11.22		
			APPROVED M. Sato '05.11.24		
			RELEASED		
DRAWING NO. EDC4-007773-73			PART NO. HR10-10J-12P (73)		
SCALE 2 : 1			CODE NO. CL110-0038-9-73		
UNITS mm			1 1		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10-10J-12P\(73\)](#)