


1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△										△									
△										△									
△										△									

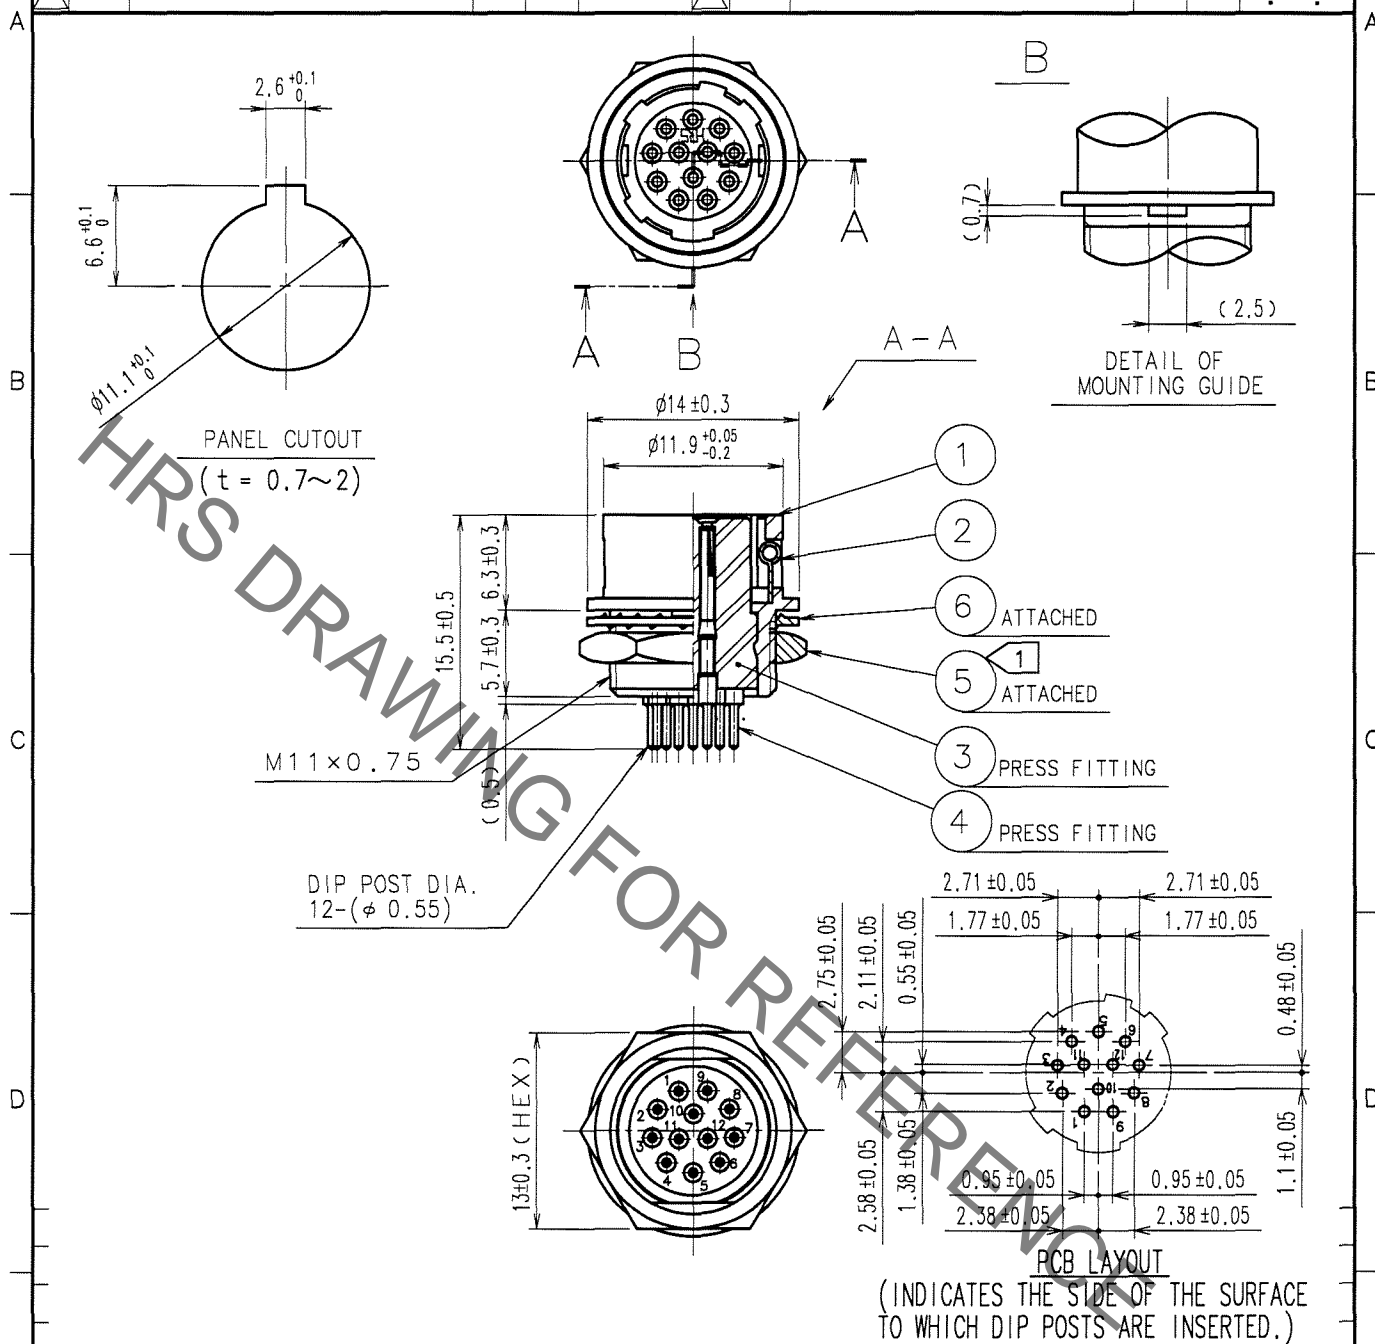

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑤ TO BE 1.5 N·m.  
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO  
PREVENT REF. NO. ⑤ FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	STAINLESS STEEL		5	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BERYLLIUM COPPER	GOLD PLATING 0.2 $\mu$ m min. NICKEL UNDER PLATING 2 $\mu$ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN D. Matsume 05.11.14	DESIGNED D. Matsume 05.11.14	CHECKED E. Kunii 05.11.14	APPROVED M. Sato 05.11.15	RELEASED
SCALE 2 : 1	DRAWING NO. EDC4-009047-73		PART NO. HR10-10R-12SA(73)		
UNITS mm	HRS HIROSE ELECTRIC CO., LTD.		CODE NO. CL110-0049-5-73		1 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10-10R-12SA\(73\)](#)