



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

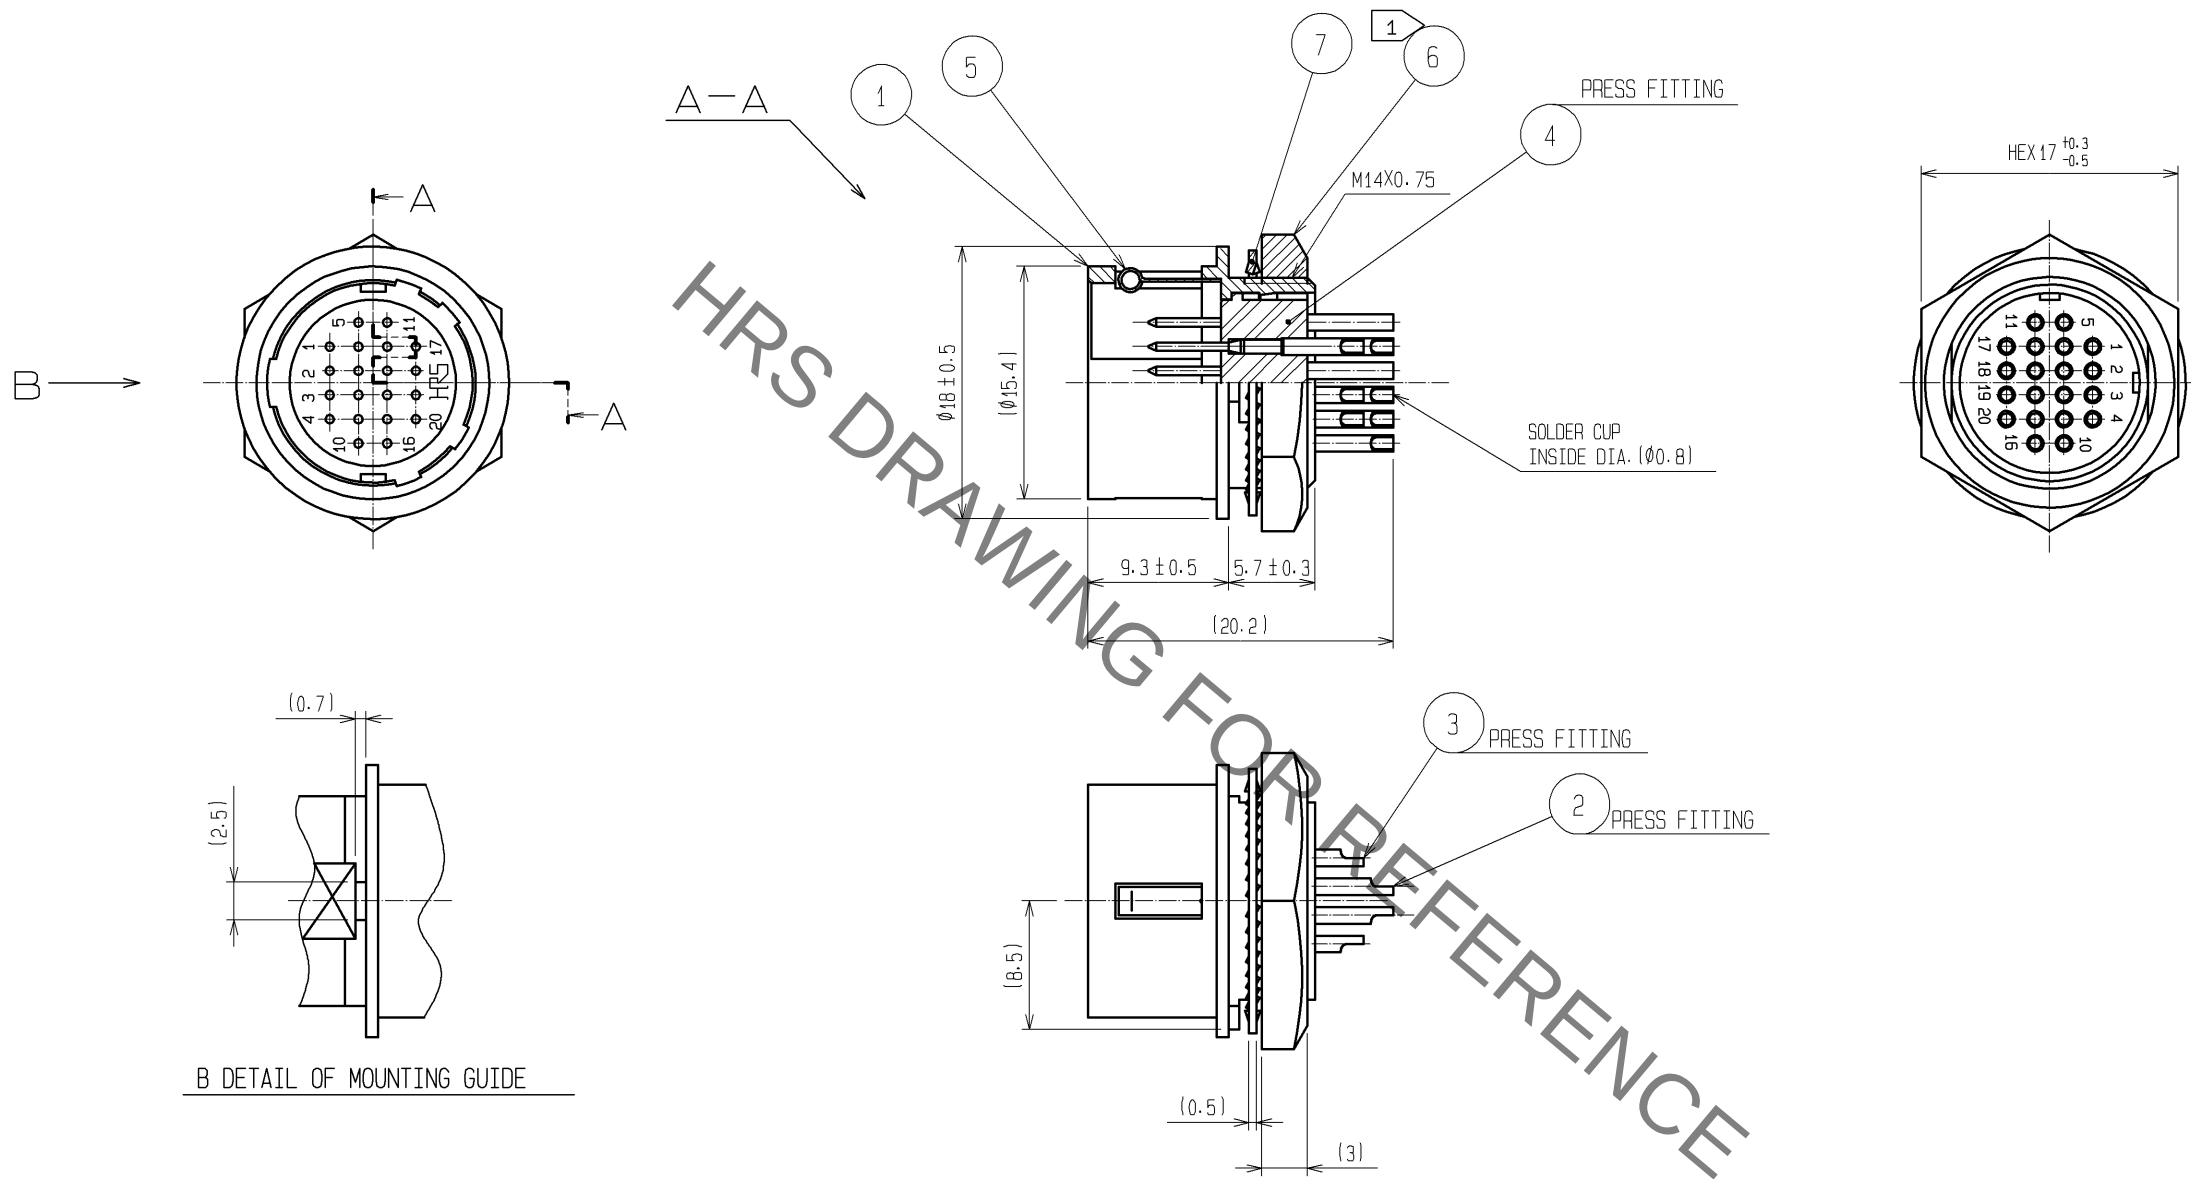

NOTE ① RECOMMENDED CLAMP TORQUE OF REF NO. ⑥ : 2 TO 2.5N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF NO. ⑥ FROM LOOSENING.

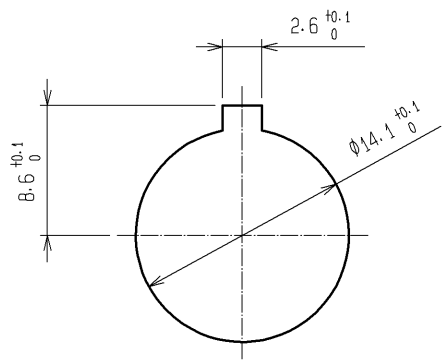

4	POLYAMIDE	(BLACK) UL94V-0			
3	BRASS	OVER PLATING: GOLD 0.2μm min.	7	PHOSPHOR BRONZE	NICKEL PLATING
2	BRASS	UNDER PLATING: NICKEL 2μm min.	6	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	STAINLESS STEEL	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH	07. 01. 15	DRAWING NO.	EDC3-045402-74
		CHECED : EJ. KUNII	07. 01. 15	PART NO.	HR10A-13R-20P (74)
		DESIGNED : TO. HORII	07. 01. 15	CODE NO.	CL110-0715-5-74
		DRAWN : MK. SATO	07. 01. 09		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10A-13R-20P\(74\)](#)