
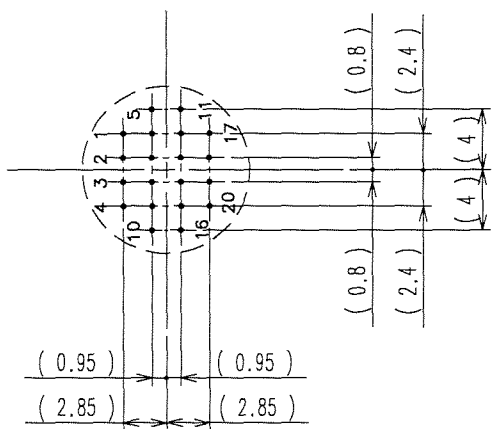
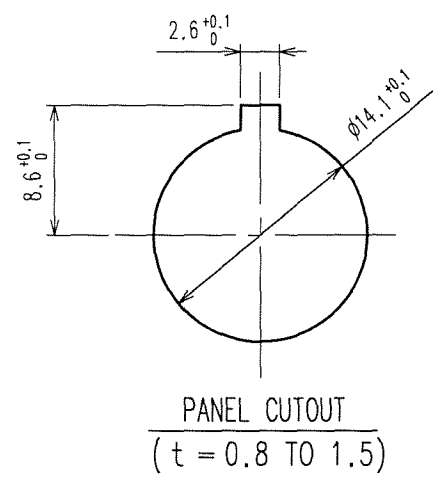
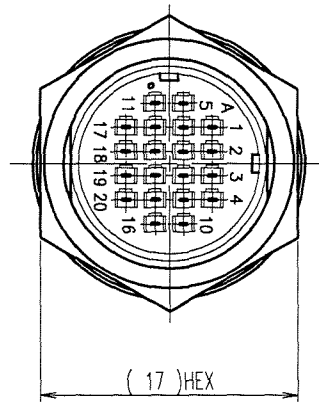


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
R

A
B
C
D
E
F

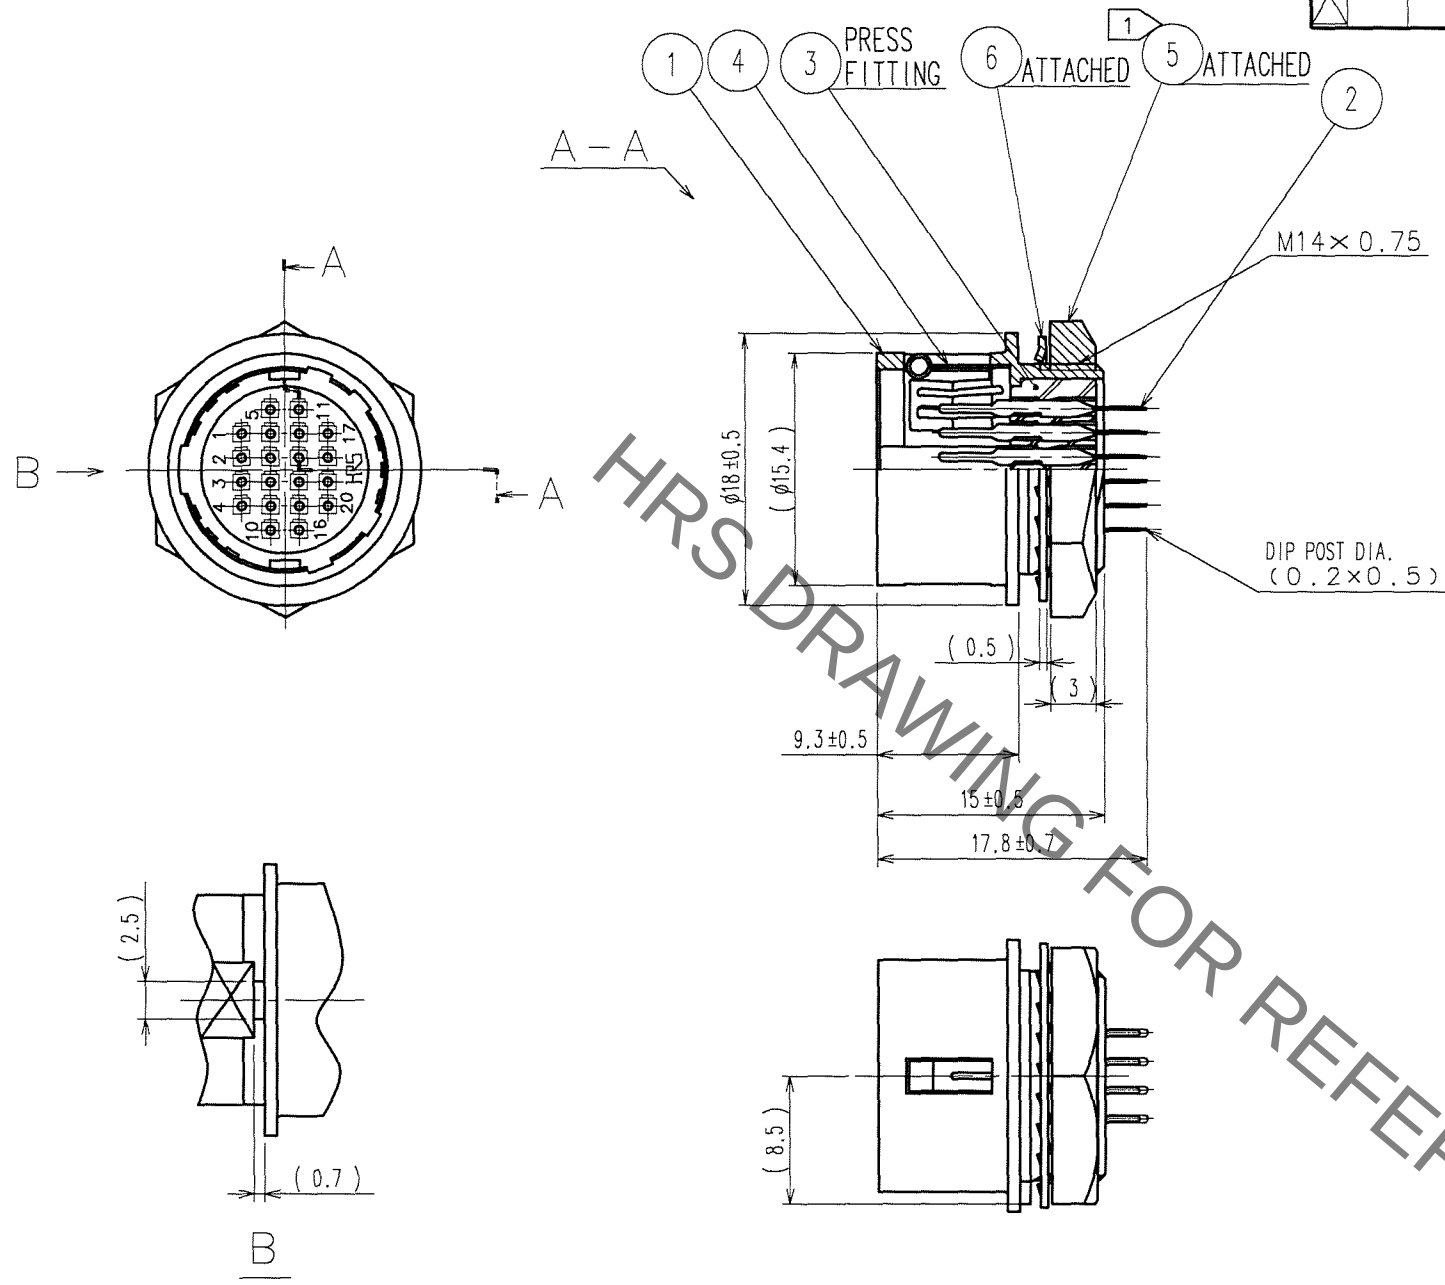

PCB LAYOUT
(INDICATES THE SIDE OF THE SURFACE
TO WHICH DIP POSTS ARE INSERTED.)

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

NOTE ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑤ : 2 TO 2.5N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑤ FOR LOOSENING.

3	POLYBUTYLENE TEREPHTHALATE (BLACK)	UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	PHOSPHOR BRONZE	SILVER PLATING 2μm min.	5	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	STAINLESS STEEL	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED
			M. Sato	T. Kuroki	E. Kurui
			07.04.11	07.04.11	07.04.11
DRAWING NO. EDC3-042759-73			PART NO. HR10G-13R-20PB(73)		
SCALE 2 : 1			CODE NO. CL110-1812-7-73		
UNITS mm			1/1		
HRS			HIROSE ELECTRIC CO., LTD		

A
B
C
D
E
F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10G-13R-20PB\(73\)](#)