


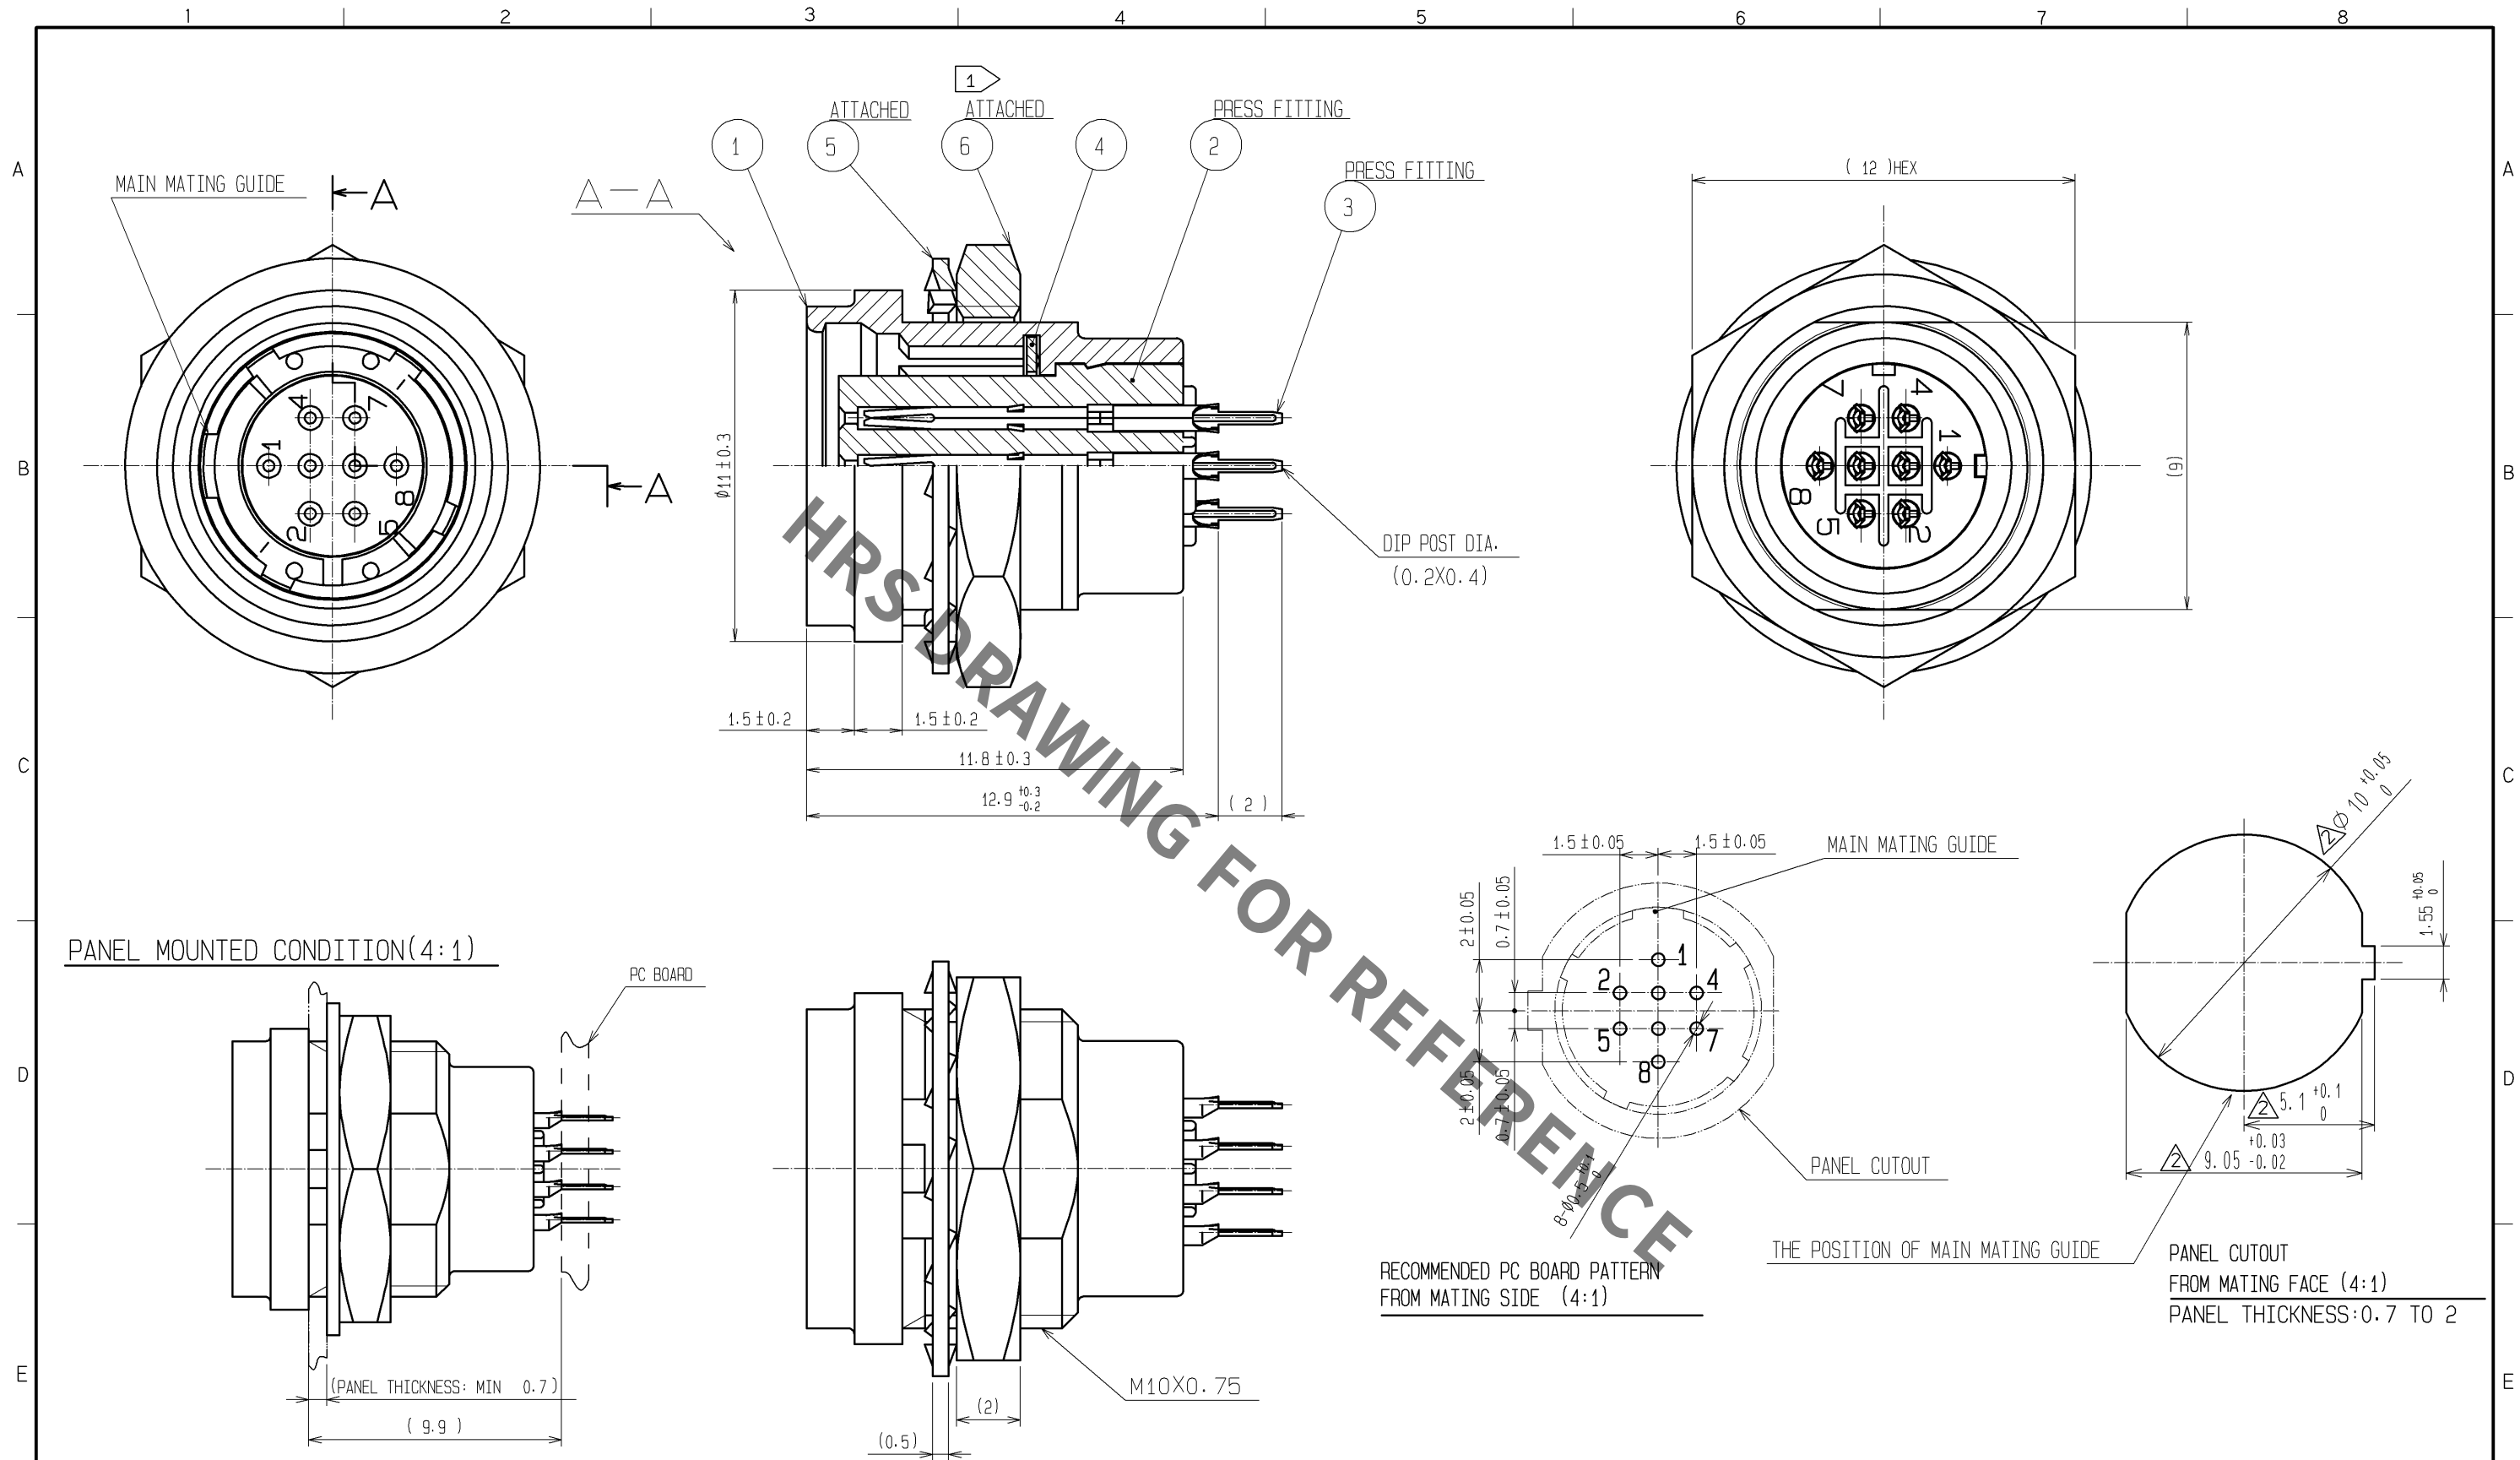

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. 6 TO BE 1 N·m.
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED
TO PREVENT LOOSENESS.
② CONTACT AREA : GOLD 0.2μm min.
TERMINAL AREA: GOLD FLASH.
UNDER PLATING: NICKEL 2μm min.

3	PHOSPHOR BRONZE		5	BRASS	NICKEL PLATING		
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING		
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	BERYLIUM COPPER	NICKEL PLATING		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS	

UNITS mm		SCALE 5 : 1		COUNT 3	DESCRIPTION OF REVISIONS DIS-C-001659		DESIGNED MM. ISHII	CHECKED HY. KISHI	DATE 10. 03. 24
 HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH		06. 10. 12		DRAWING NO. EDC3-115084-00			
		CHECKED : MO. SATOH		06. 10. 12		PART NO. HR25A-7R-8SA			
		DESIGNED : YH. YAMADA		06. 10. 11		CODE NO. CL125-0642-2-00			
		DRAWN : MK. SATO		06. 09. 11					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR25A-7R-8SA](#)