



REVISIONS			REVISIONS			REVISIONS			
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				• •	△				• •
△				• •	△				• •
△				• •	△				• •

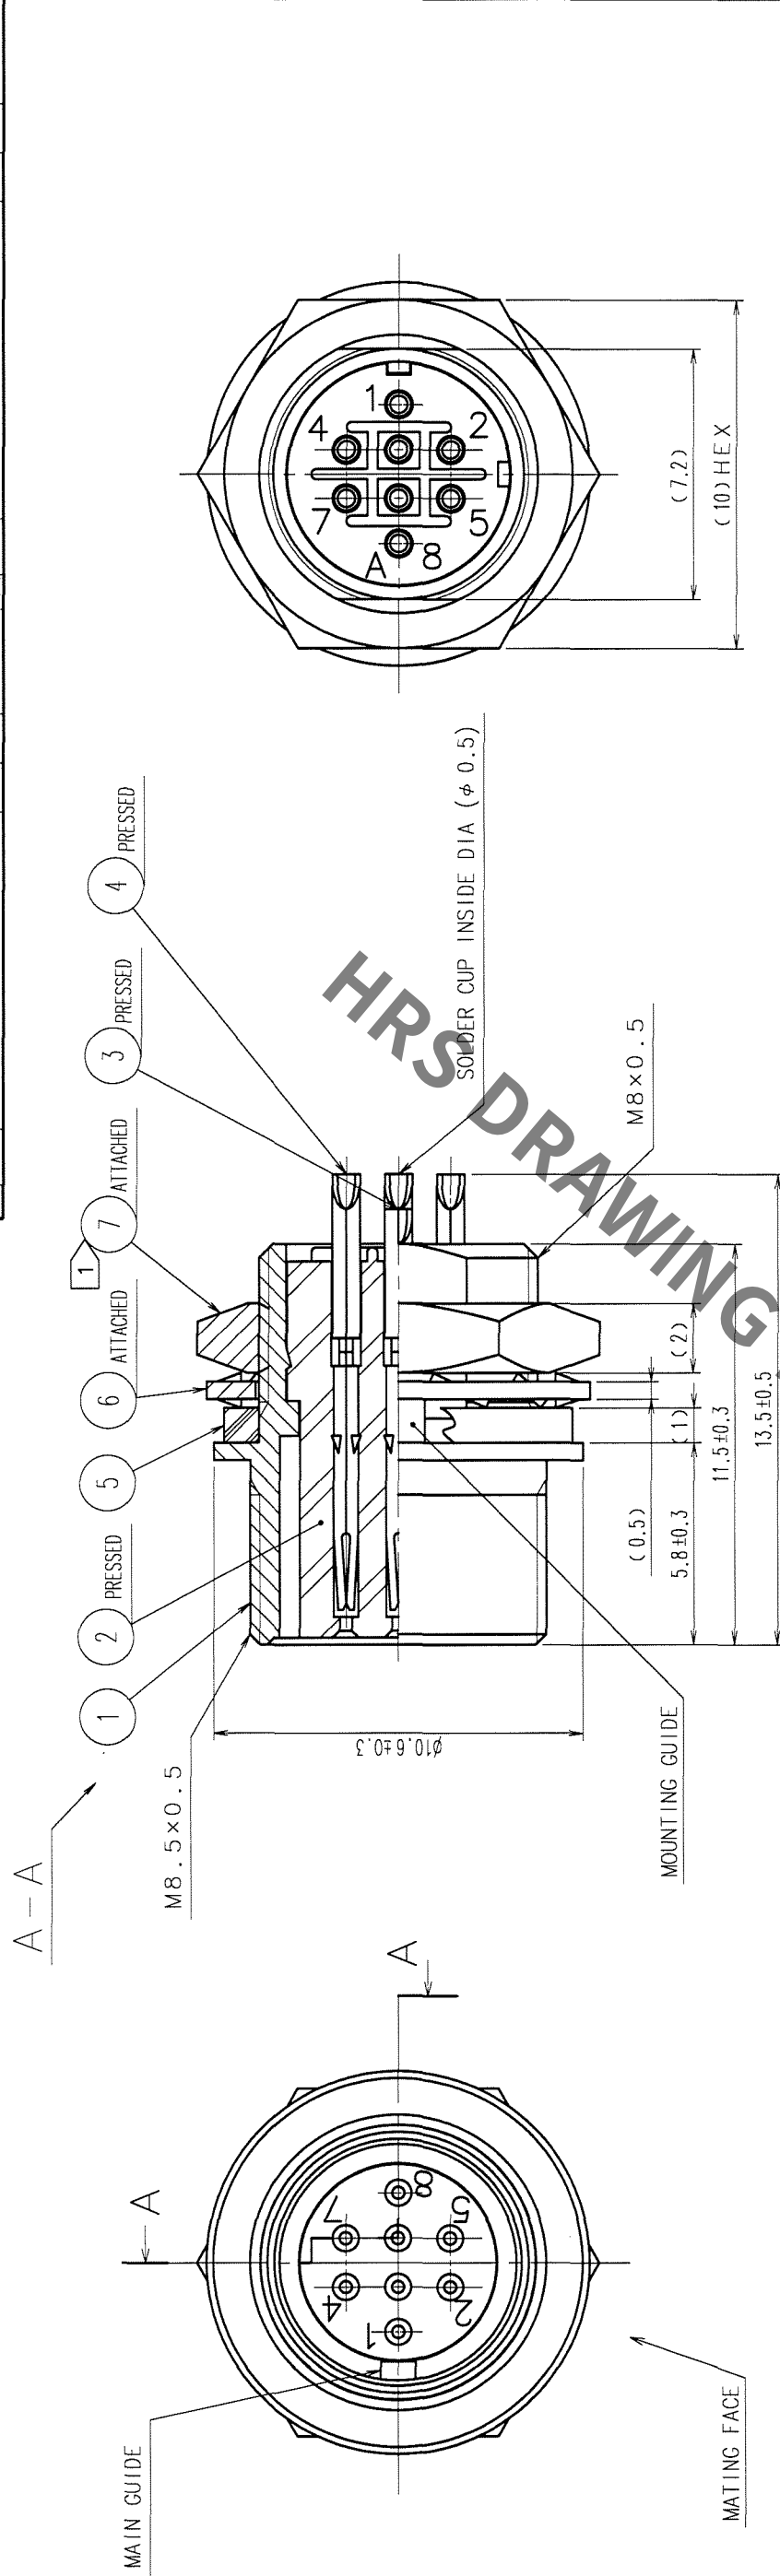

NOTES

1 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ϕ TO BE 1 N · m.
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT
IS RECOMMENDED TO PREVENT LOOSENESS.

2 CONTACT AREA : GOLD 0.2 μ m min.
TERMINAL AREA : GOLD FLASH
UNDER PLATING : NICKEL 2 μ m min.

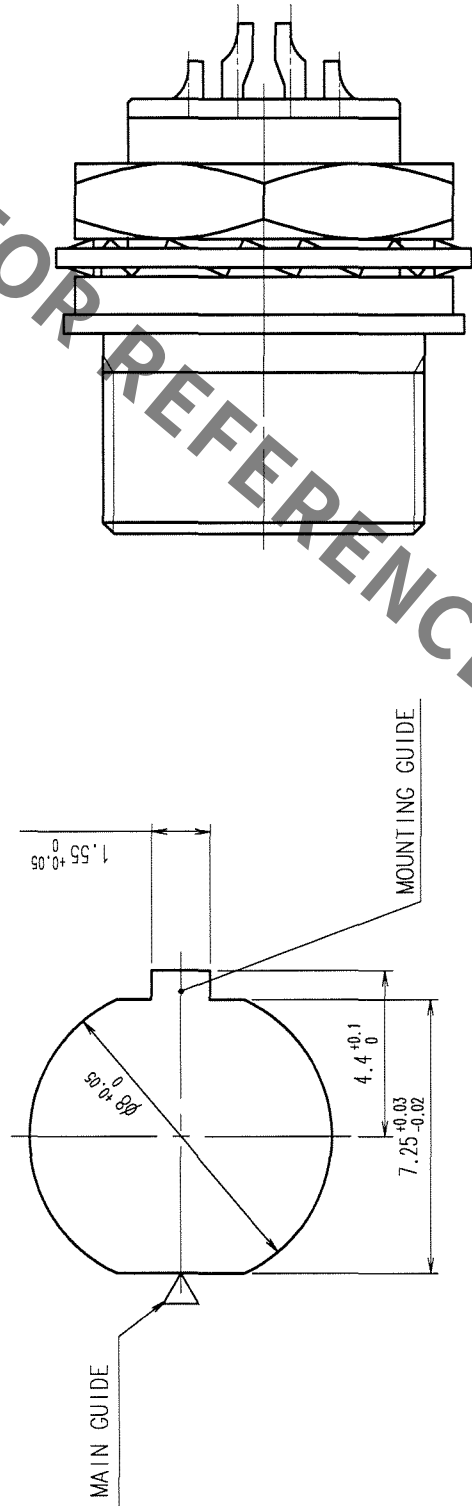

PANEL CUTOUT
(PANEL THICKNESS 0.7 TO 2)

4	PHOSPHOR BRONZE					
3	PHOSPHOR BRONZE			7	BRASS	NICKEL PLATING
2	PPS	(BLACK)	UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH	NICKEL PLATING	5	EPDM	(BLACK)
NO.	MATERIAL	FINISH,	REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	H. Kawashima	H. Kawashima	J. Okuyama	M. Sato	
	63-11-29	65-11-29	65-11-29	05-11-30	

 SCALE 5 : 1	 DRAWING NO. EDC3-047696-73	 PART NO. HR25-7TR-8S(73)	 CODE NO. CL125-0011-1-73	1	1
				 HIROSE ELECTRIC CO., LTD	
UNITSmm					

TO	R			
----	---	--	--	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR25-7TR-8S\(73\)](#)