

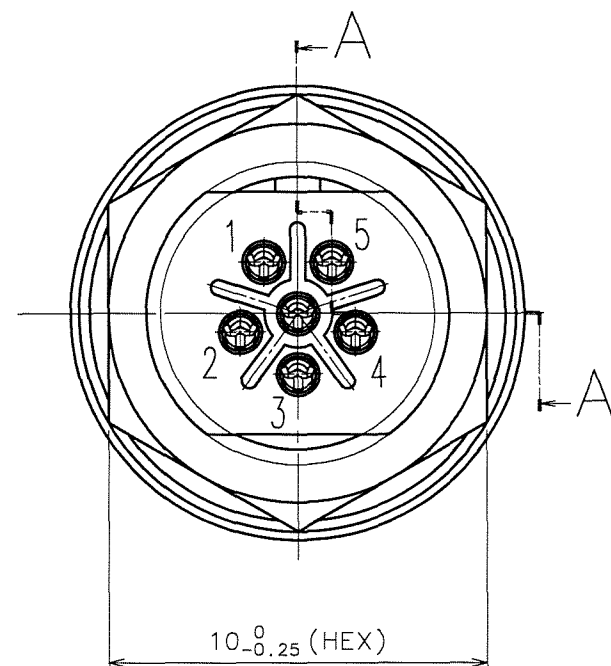
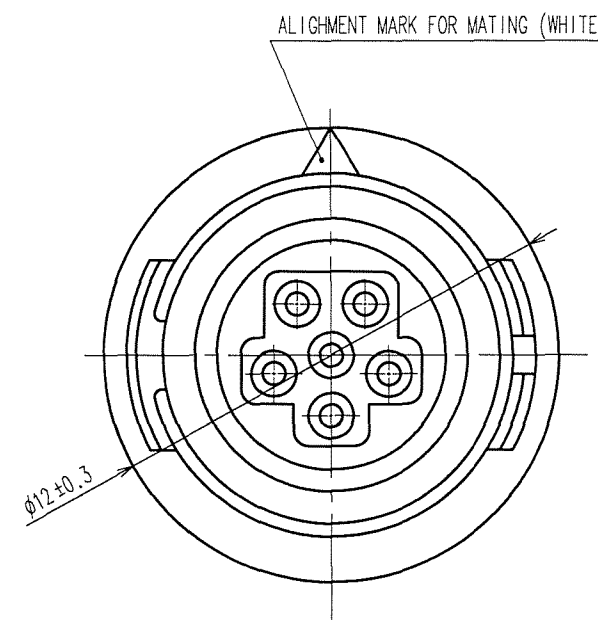


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	1	DIS-C-000585	T.K.E.K		07.07.27	1					. .
2					. .	2					. .
3					. .	3					. .

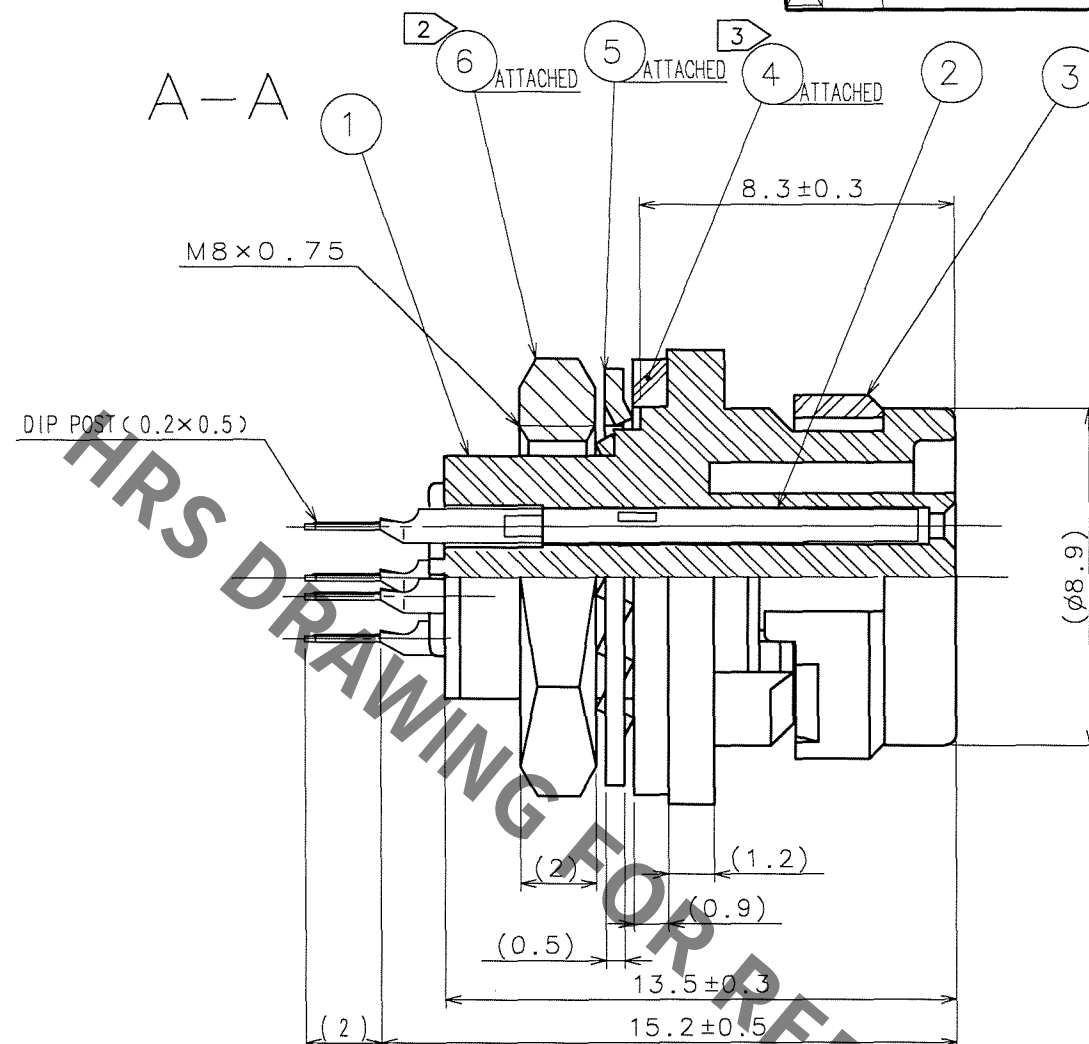

DIP POST LOCATION DIMENSIONS IN THE VIEW
FROM CONNECTOR OPENING SIDE

(RECOMMENDED MAXIMUM PANEL THICKNESS : 1.2)

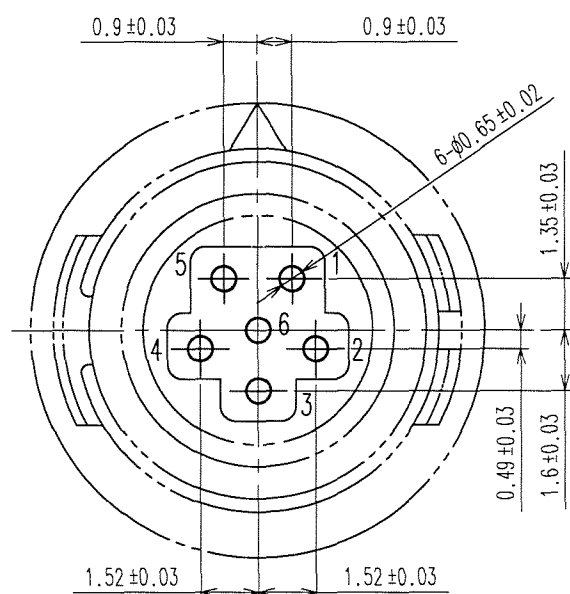

- NOTES
- ① FINISH OF REF.NO.②
CONTACT AREA : GOLD 0.2μm min.
DIP AREA : GOLD FLASH.
UNDER PLATING: NICKEL 2μm min.
 - ② RECOMMENDED TIGHTENING TORQUE OF REF.NO.⑥ : 0.5 N·m.
LOOSENED NUT MAY CAUSE THE DETERIORATION OF WATER-RESISTANCY.
THE USE OF LOOSENING-PREVENTIVE ADHESIVE IS STRONGLY RECOMMENDED.
RECOMMENDED THREAD LOCKER : LOCTITE 271, LOCKPRIMER 7649, HENKEL JAPAN LTD.
 - ③ AFTER REF.NO.④ IS INSERTED TO REF.NO.① ,
REF.NO.① IS MOUNTED ON THE PANEL.
MAKE SURE THAT REF.NO.④ DOES NOT HAVE ANY FACTORS TO REDUCE WATER-RESISTANCY,
SUCH AS SCRATCH, TWIST, PINCHING, OR DUST.

3	PPS	(BLACK) UL94V-0	6	BRASS 	NICKEL PLATING
2	COPPER ALLOY		5	PHOSPHOR BRONZE	NICKEL PLATING
1	PPS	(BLACK) UL94V-0	4	CR	(BLACK)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN E. KUNII '05 10 14	DESIGNED E. KUNII '05 10 14	CHECKED /	APPROVED M. SATO '05 10 17	RELEASED .
----------------------	--------------------------------	-----------------------------------	--------------	----------------------------------	---------------

	DRAWING NO.	PART NO.
	SCALE 5 : 1	EDC3-113559-71 HR30-6R-6SD(71)
	UNITS 	 HIROSE ELECTRIC CO., LTD CODE NO. CL130-1021-6-71

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR30-6R-6SD\(71\)](#)