

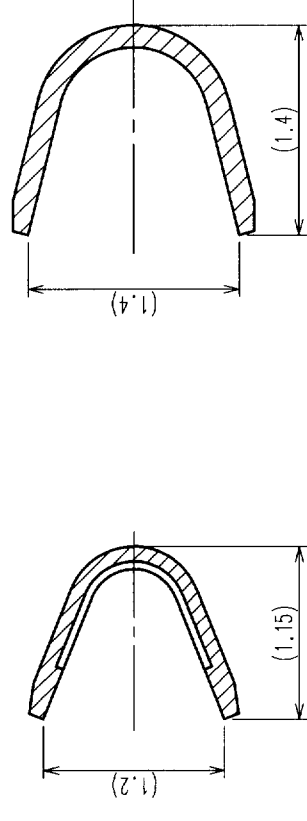
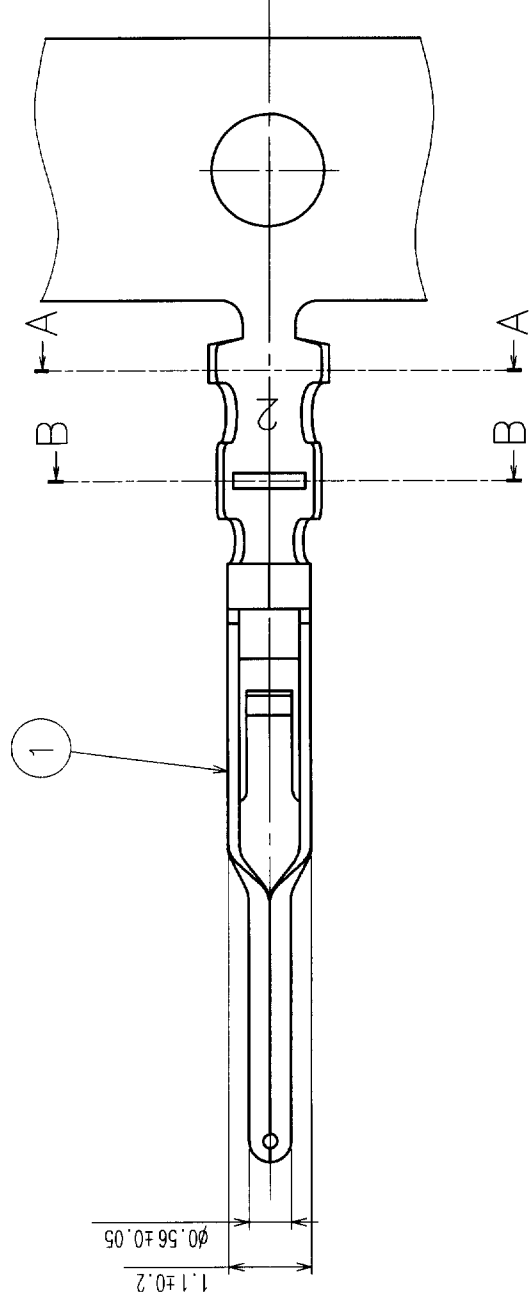
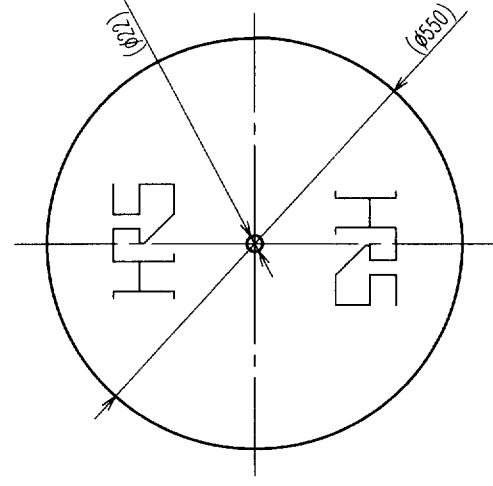
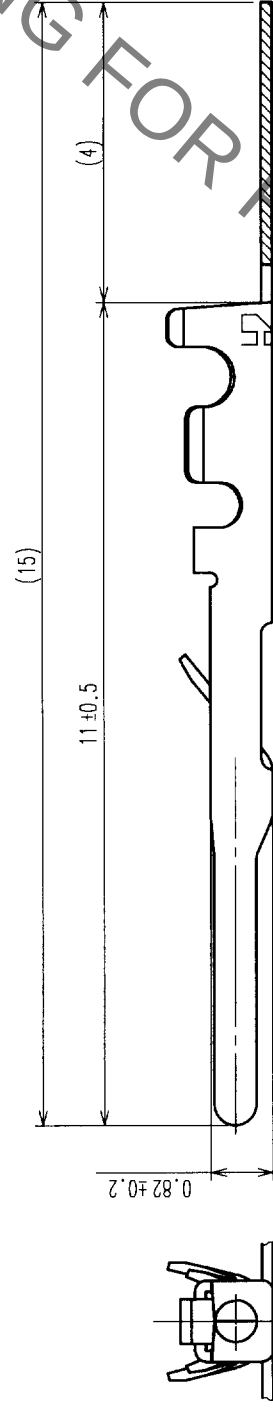


COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE
	△					.	△						.
	△					.	△						.
	△					.	△						.



3 FIG.1 RECOMMENDED CABLE PREPARATION DIMENSIONS



NOTES 1 THIS PRODUCT IS APPLY TO THE WIRE 26-30 AWG(WIRE JACKET DIAMETER $\phi 1$ MAX).
2 PER REEL: 10000 CONTACTS
3 > RECOMMENDED CABLE PREPARATION DIMENSIONS ARE SHOWN IN FIG.1

1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING	2	CARTON	(TERMINAL WINDING REEL)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H. Zemba	H. Zemba	E. Kunii	M. Yoshida	
		01-01-05	01-01-05	01-01-05	01-01-10	
DRAWING NO.		PART NO.				
EDC3-112452		HR30-PC-211				
SCALE						
10 : 1						
UNITS	HIROSE ELECTRIC CO., LTD		CODE NO.		CL 130-0016-0	
mm					1 / 1	

TO	R			
----	---	--	--	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR30-PC-211](#)