
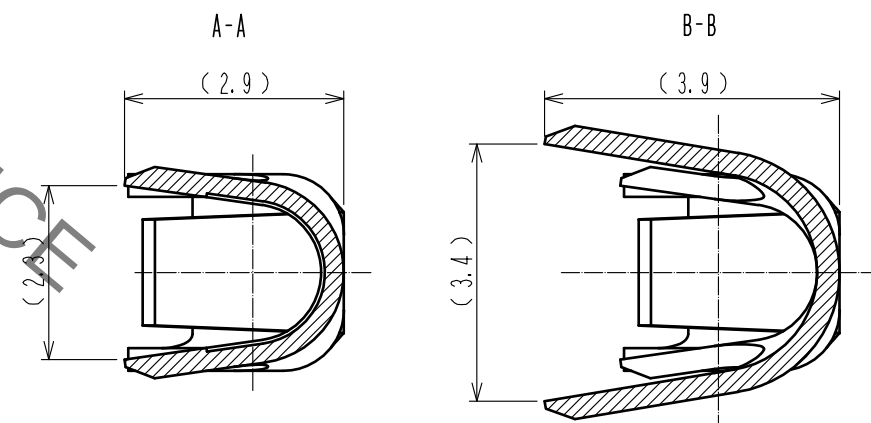
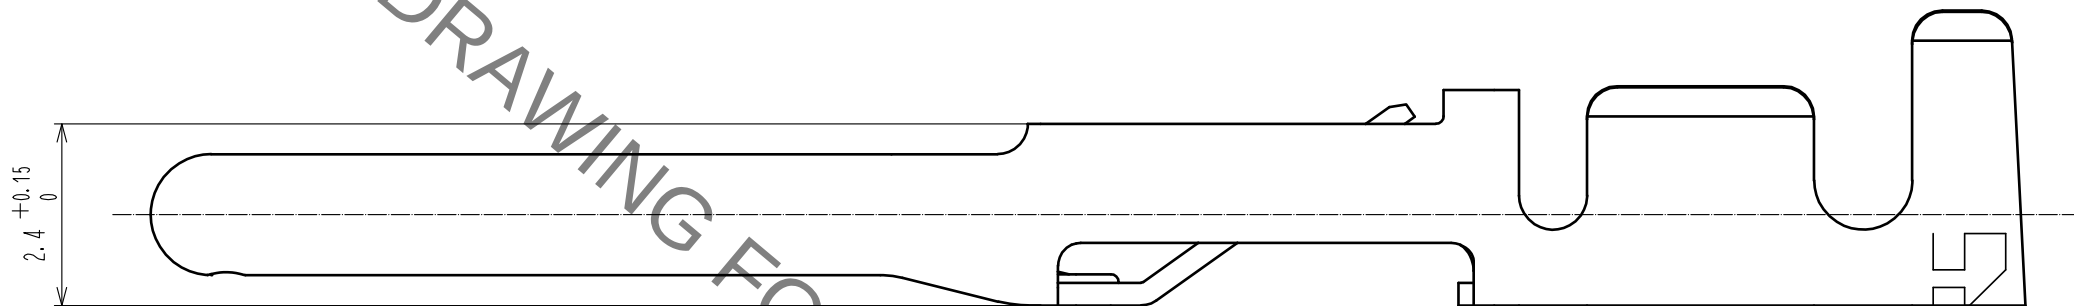
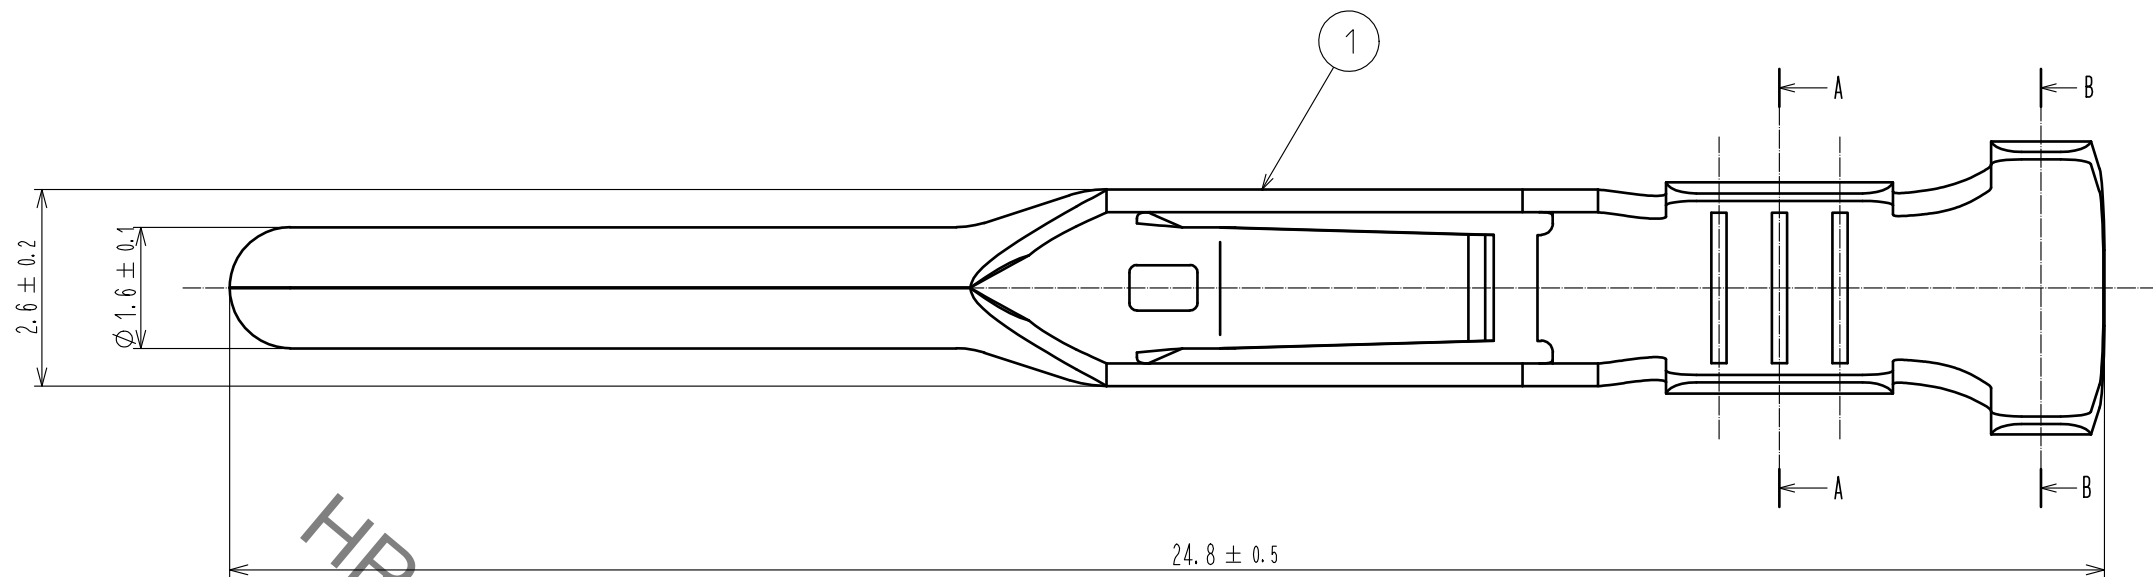



Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes 1 This product is apply to the wire #16 to #20.
(Jacket diameter : $\phi 1.9$ to 3.2mm)
- 2 Applicable crimping tool : HT802/HR41A-11-16 (CL150-0408-5)(Applicable to AWG#16)
HT802/HR41A-11-18 (CL150-0404-4)(Applicable to AWG#18)
HT802/HR41A-11-20 (CL150-0407-2)(Applicable to AWG#20)
- 3 Applicable extraction tool : HR41A-TP(CL150-0405-7)
- 4 Per reel : 100 contacts
- 5 Contact plating : Gold plating $0.2\mu\text{m}$ min.
Terminal plating : Tin plating $0.5\mu\text{m}$ min.
Underplating : Nickel plating $2\mu\text{m}$ min.

1	Copper alloy	5						
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS	
UNITS mm		SCALE 10 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00000101	DESIGNED HN. TANAKA	CHECKED HY. KISHI	DATE 15. 02. 10
 HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII			15. 01. 22	DRAWING NO. EDC-118389-01-00		
		CHECKED : HY. KISHI			15. 01. 22	PART NO. HR41A-PC-111(C01)		
		DESIGNED : HN. TANAKA			15. 01. 22	CODE NO. CL141-0214-8-01		
		DRAWN : HN. TANAKA			15. 01. 22	 1 / 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR41A-PC-111\(01\)](#)