
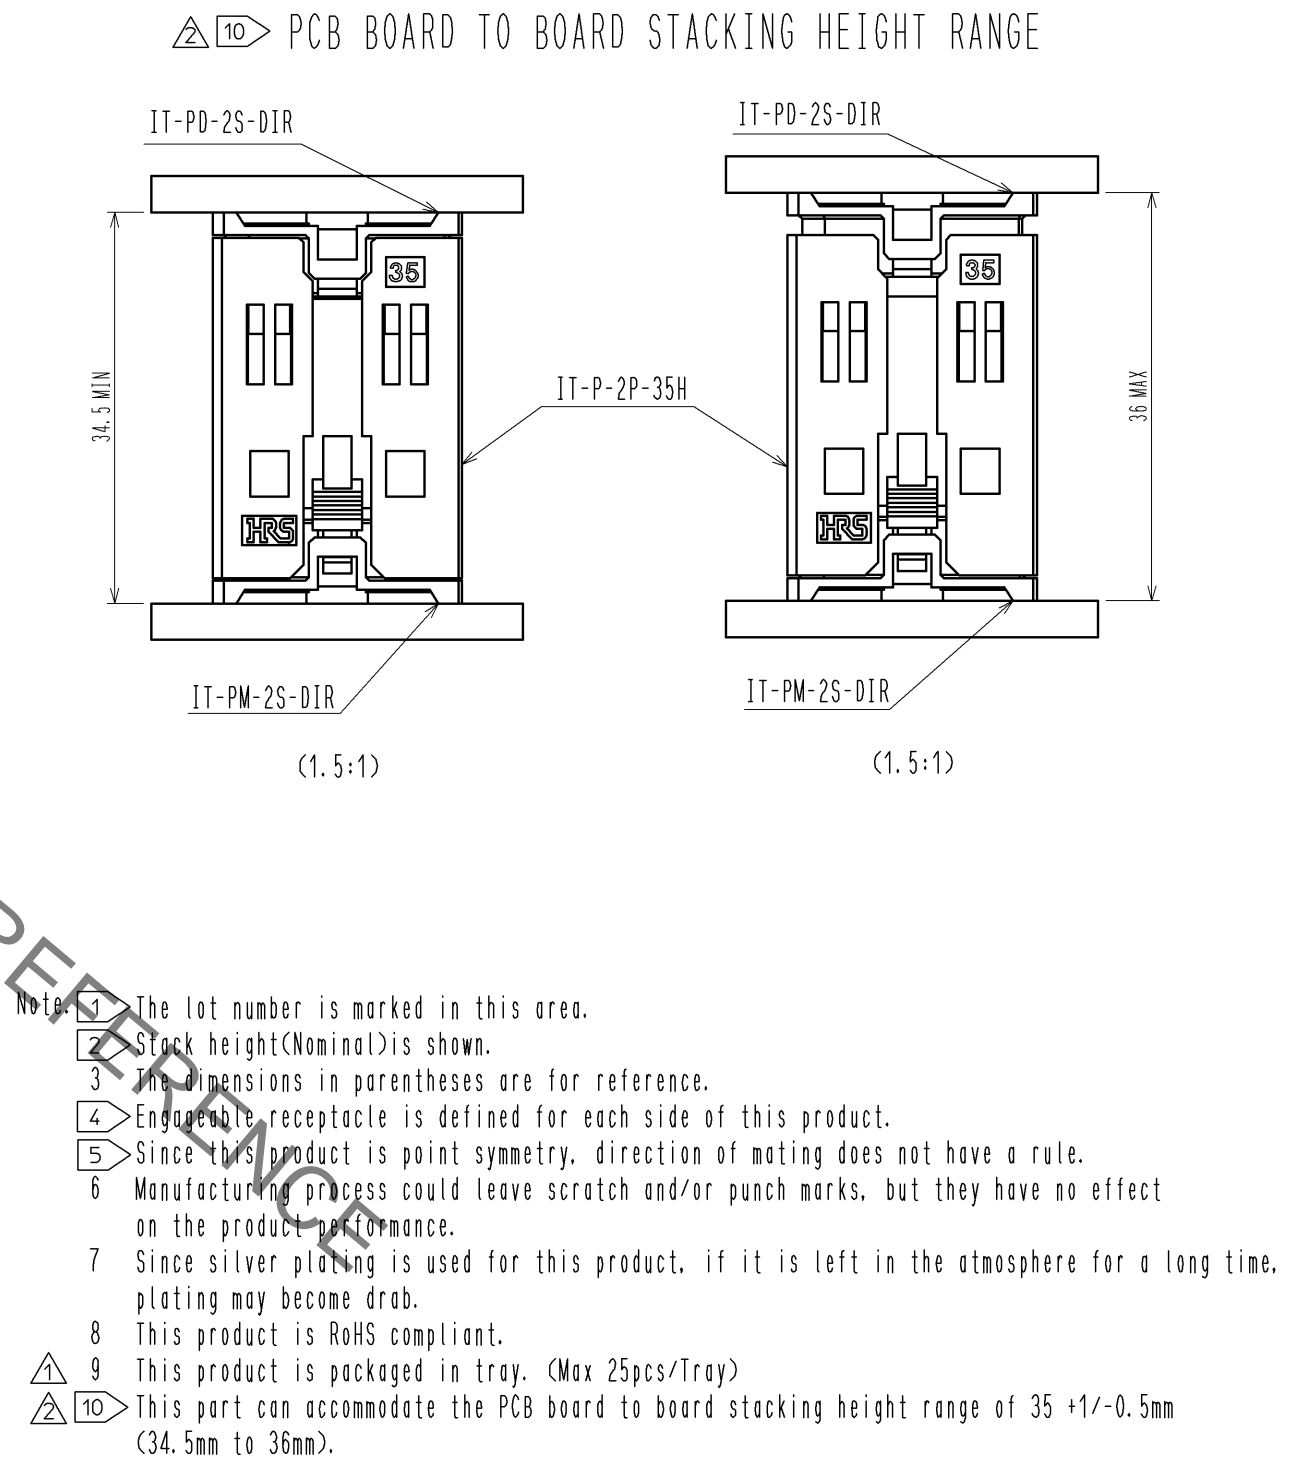



Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

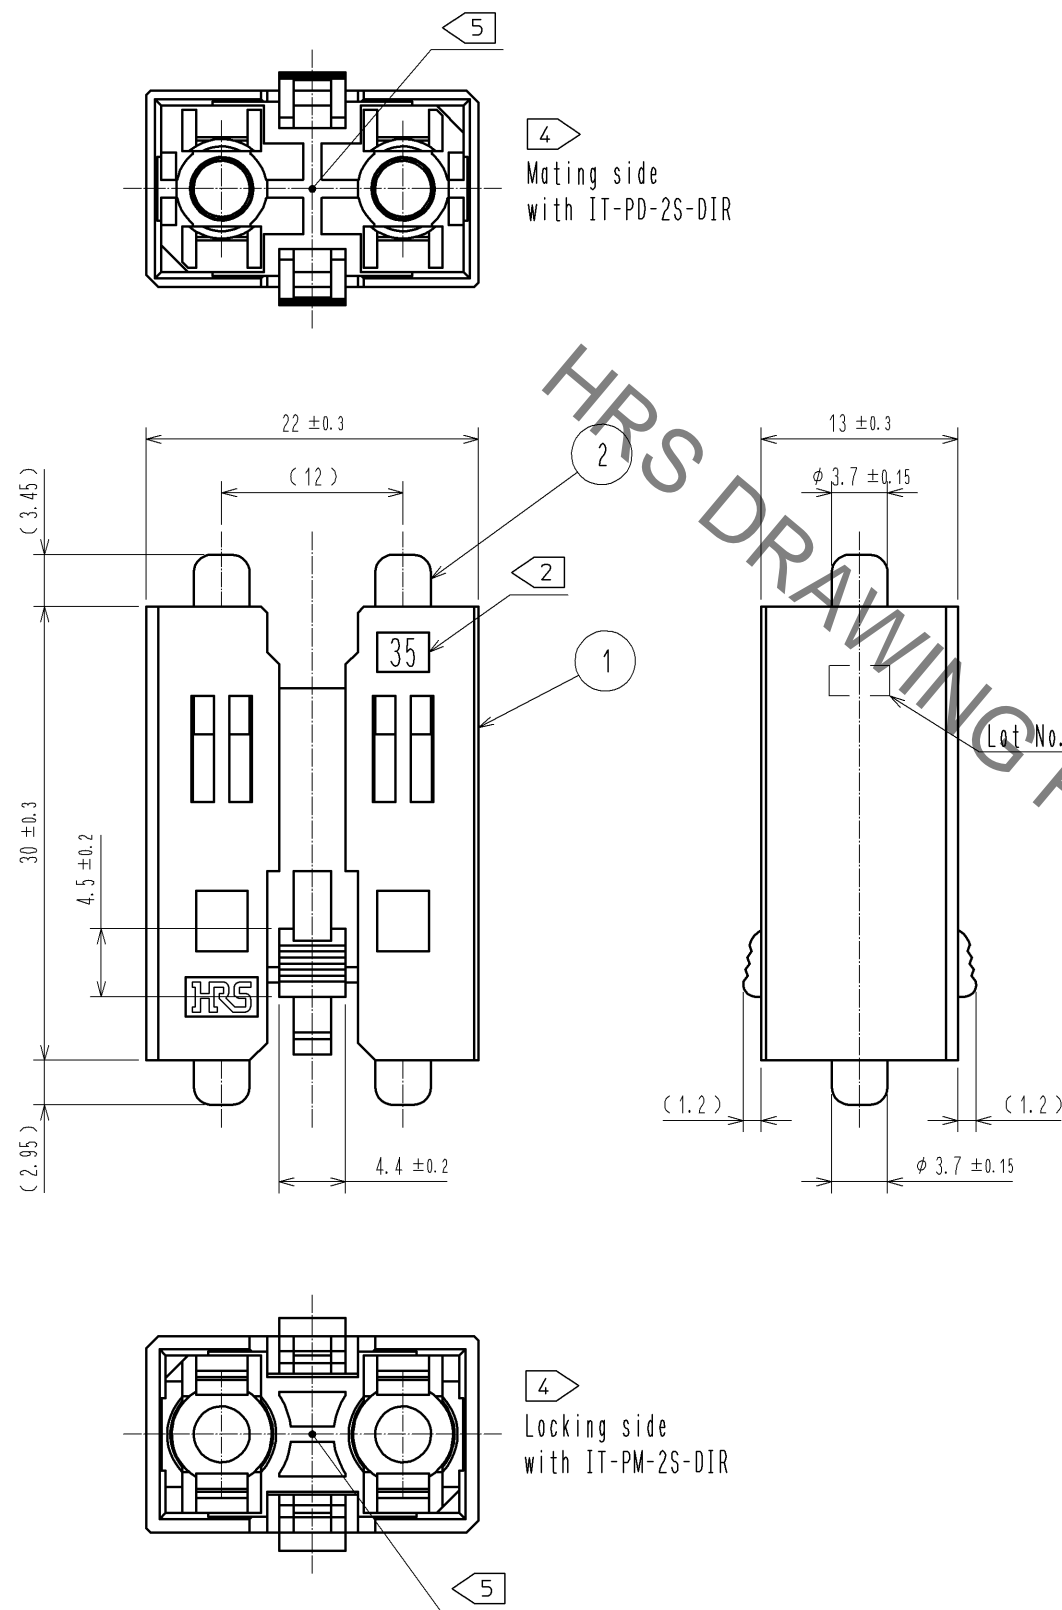

- Note:
- 1 The lot number is marked in this area.
 - 2 Stack height(Nominal)is shown.
 - 3 The dimensions in parentheses are for reference.
 - 4 Engageable receptacle is defined for each side of this product.
 - 5 Since this product is point symmetry, direction of mating does not have a rule.
 - 6 Manufacturing process could leave scratch and/or punch marks, but they have no effect on the product performance.
 - 7 Since silver plating is used for this product, if it is left in the atmosphere for a long time, plating may become drab.
 - 8 This product is RoHS compliant.
 - 9 This product is packaged in tray. (Max 25pcs/Tray)
 - 10 This part can accommodate the PCB board to board stacking height range of 35 +1/-0.5mm (34.5mm to 36mm).

2	Brass	Over Plating : Silver 5.1μm	4	Polystyrene	(Tray B)
1	PBT	Black UL94V-0	3	Polystyrene	(Tray A)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-F-006732	DESIGNED TF. SUGAWARA
		APPROVED : HS. OKAWA	11.12.16	DRAWING NO.	EDC3-339735-00
		CHECED : KI. HIROKAWA	11.12.15	PART NO.	IT-P-2P-35H
		DESIGNED : KN. SHIBUYA	11.12.15	CODE NO.	CL636-0602-2-00
		DRAWN : KN. SHIBUYA	11.12.15		
				DATE	13.04.01

Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

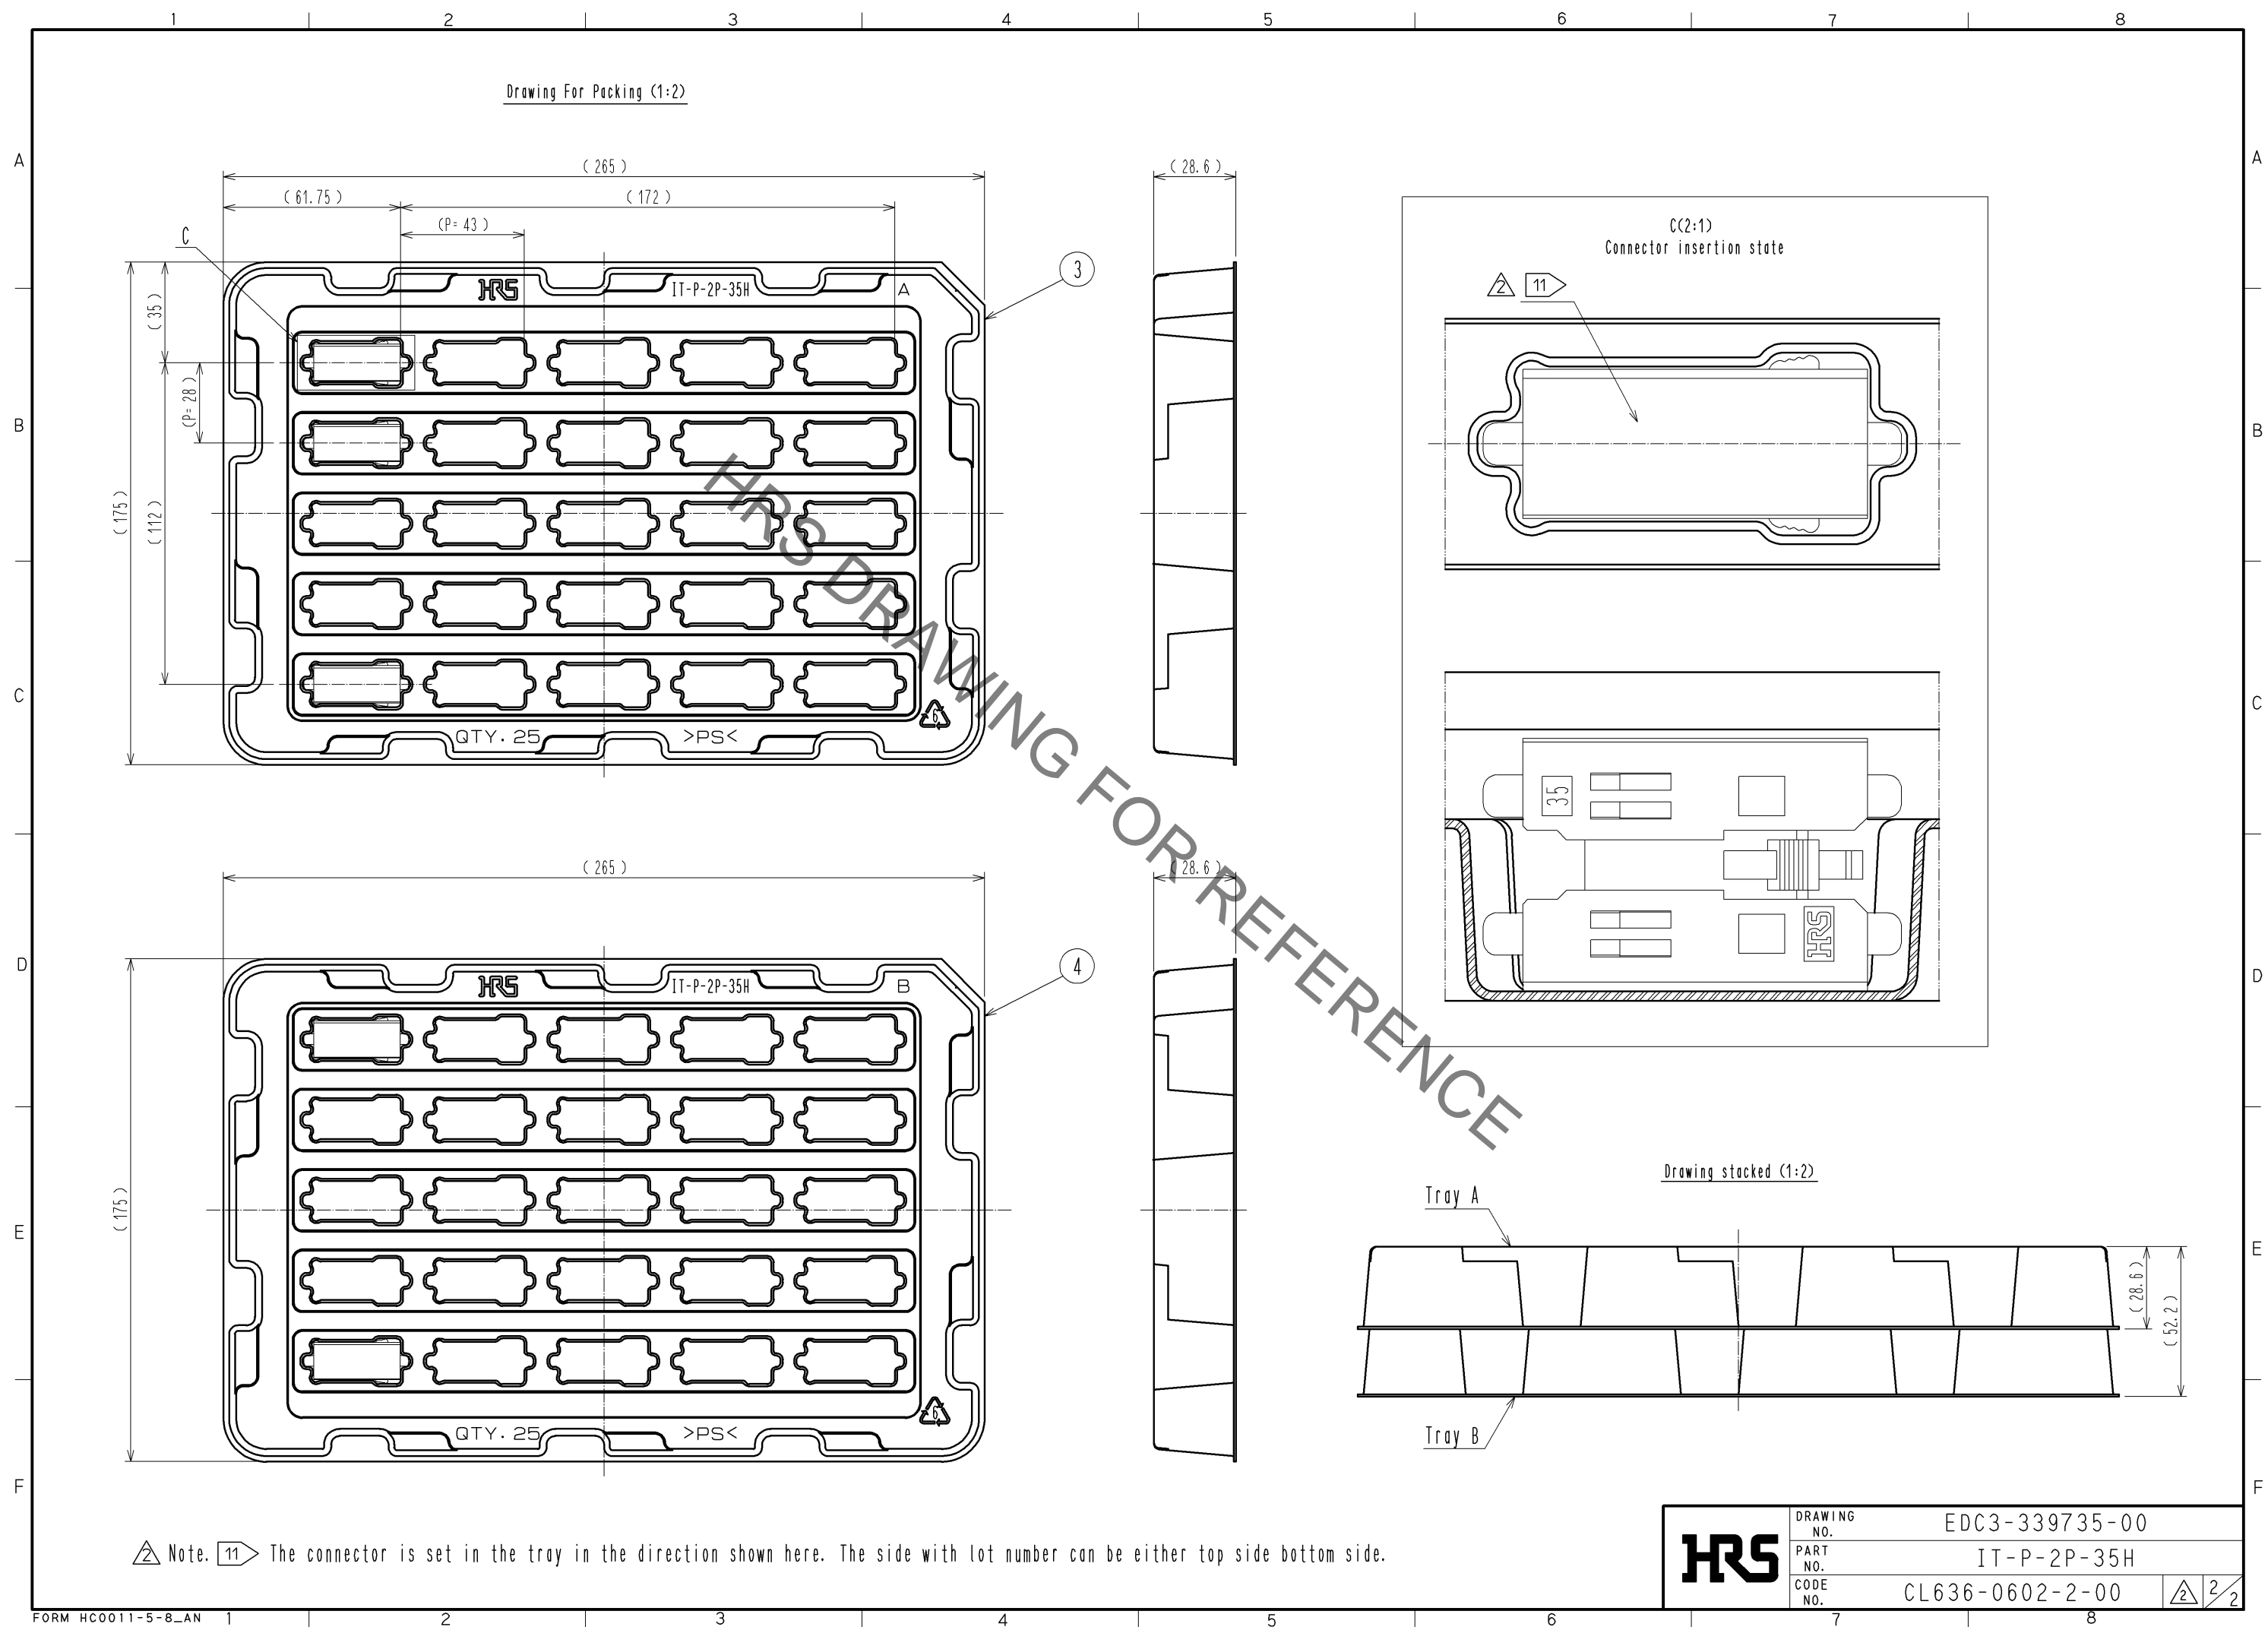

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[IT-P-2P-35H](#)