
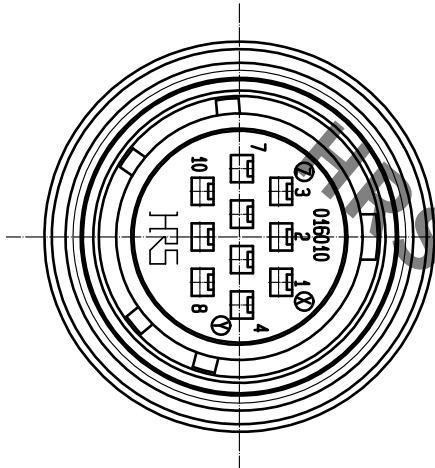




- NOTES 1 APPLICABLE CRIMP CONTACT: JRC-SC2-212(AWG#20 TO 24)
JRC-SC2-222(AWG#24 TO 28)
- 2 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL):RM-TP
- ③ THE RECOMMENDED CLAMP TORQUE, REF. NO. ④: 3 TO 3.5N・m.
- ④ THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑧: 0.2 TO 0.25N・m.
AND LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT FROM LOOSENING.
- 5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ④ TO REF. NO. ① IS SHOWN.
- 6 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR16WCC-※.
※ DESIGNATE DIAMETER OF APPLICABLE CABLE.
- 7 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

4	BRASS	BLACK CHROME PLATING	8	STAINLESS STEEL				
3	PHOSPHOR BRONZE	NICKEL PLATING	7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)			
2	POLYCARBONATE	(BLACK) UL94V-0	6	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)			
1	ALUMINUM ALLOY	BLACK CHROME PLATING	5	BRASS	BLACK CHROME PLATING			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	,HY. KOBAYASHI		18. 02. 26	DRAWING NO. EDC-110655-31-00		
		CHECKED	,HY. KOBAYASHI		18. 02. 26	PART NO. JR16WP-10SC(31)		
		DESIGNED	,TH. KAMEYA		18. 02. 24	CODE NO. CL114-2122-0-31		
		DRAWN	,MK. INOUE		18. 02. 14	 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[JR16WP-10SC\(31\)](#)