




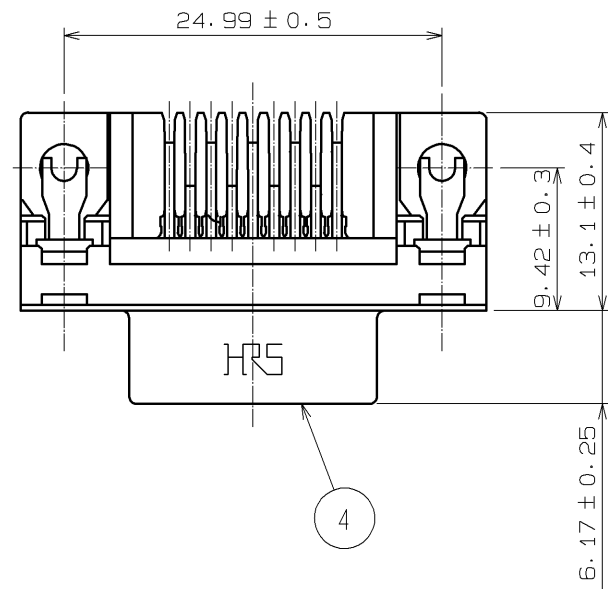

RECOMMENDED PC BOARD HOLE PATTERN
(SCALE 1/1)

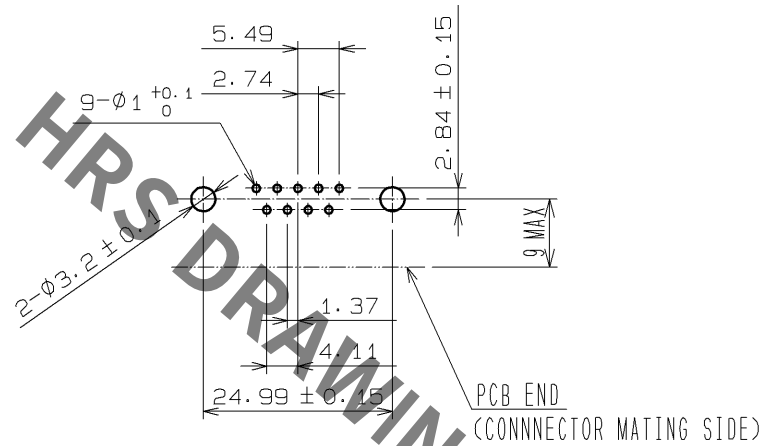

△ 4 PANEL CUT OUT DIMENTIONS<REFERENCE>

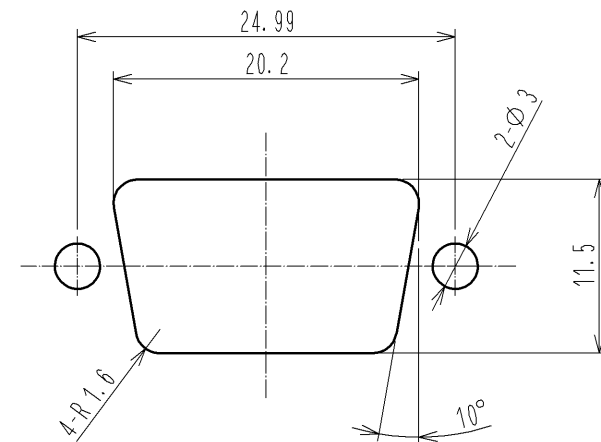



NOTES 1. PLEASE KEEP THE TOLERANCE TO LESS THAN ± 0.1 FOR THE DIMENTIONS WITHOUT TOLERANCE.

2. THICKNESS OF PC BOARD SHALL BE 1.6mm.

3. REF. NO. ③ AND ④ SHALL BE TEMPORARILY.

REF. NO. ③ AND ⑤ SHALL BE TEMPORARILY.

△ 4 ATTACH THE PRODUCT TO A PANEL WITH SEPARATELY AVAILABLE LOCK SCREW FOR USE.

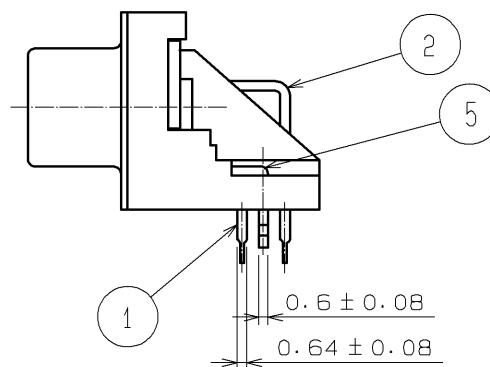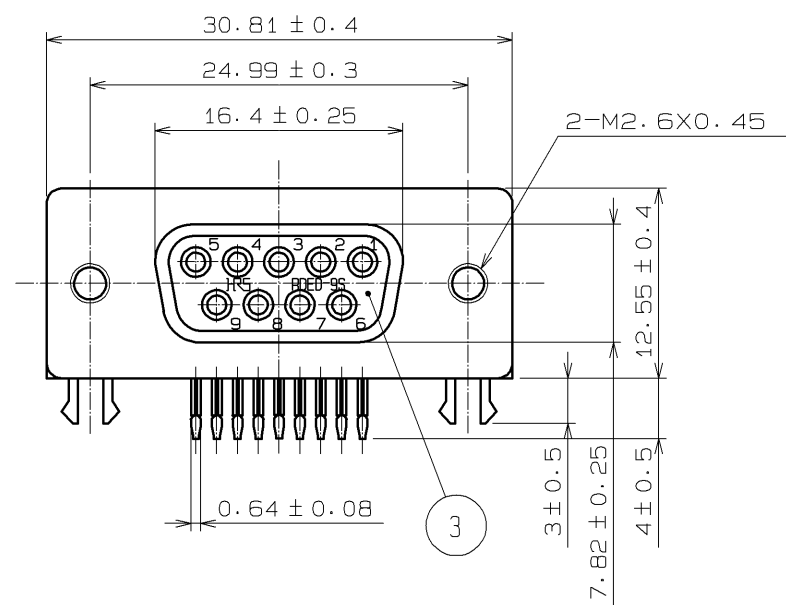

PART NUMBER	FEMALE SCREW SIZE	THICKNESS OF APPLICABLE PANEL
RDG-LNA (01)	M2.6X0.45	1.6~2.0
RDG-LNA-W1 (01)		0.8~1.2
RDG-LNA-W2 (01)		0~0.4
RDG-LNA (4-40) (01)	No. 4-40UNC	1.6~2.0
RDG-LNA (4-40)-W1 (01)		0.8~1.2
RDG-LNA (4-40)-W2 (01)		0~0.4

3	PBT	UL94V-0<BLACK>			
2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm	5	PHOSPHOR BRONZE	TIN PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm	4	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-002464	DESIGNED MT. ITANO
HIROSE ELECTRIC CO., LTD.		APPROVED : HO. MIWA	05.01.05	DRAWING NO.	EDC3-047706-02
		CHECKED : YH. ENAMI	05.01.05	PART NO.	RDED-9SE1/M2.6<55>
		DESIGNED : TU. TANIGUCHI	05.01.05	CODE NO.	CL211-5195-9-55
		DRAWN : TU. TANIGUCHI	05.01.05		
					DATE 08.10.07

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RDED-9SE1/M2.6\(55\)](#)