
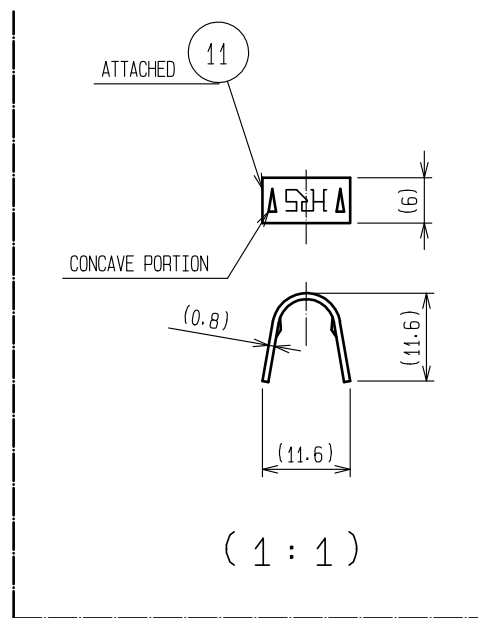


- NOTES
- ① ACROSS FLATS OF HEXAGON HEAD OF REF.NO.⑩ : 1.27.
THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑩ : 0.3 TO 0.4N · m.
 - ② THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑧ : 1N · m.
 - ③ LOCTITE 271, HENKEL JAPAN IS RECOMMENDED TO REF.NO.⑧ AND ⑩ FROM LOOSENING.
 - ④ CRIMP REF.NO.⑪ INTO THE CABLE. TIP OF REF.NO.⑩ SHALL BE TOUCHED INTO A CONCAVE PORTION OF REF.NO.⑪.
 - ⑤ ROTATION EXAMPLES OF REF.NO.① AND ⑧ ARE SHOWN.
 - ⑥ SURFACE PLATING : GOLD PLATING 0.2μm min.
UNDER PLATING : NICKEL PLATING 3μm min.
 - ⑦ Fig.1 REPRESENTS THE PRODUCT APPEARANCE AFTER IMPROPER ASSEMBLY.
IF THE LOCK GROOVE IS VISIBLE, NO.① AND NO.⑧ MAY NOT BE ASSEMBLED CORRECTLY.

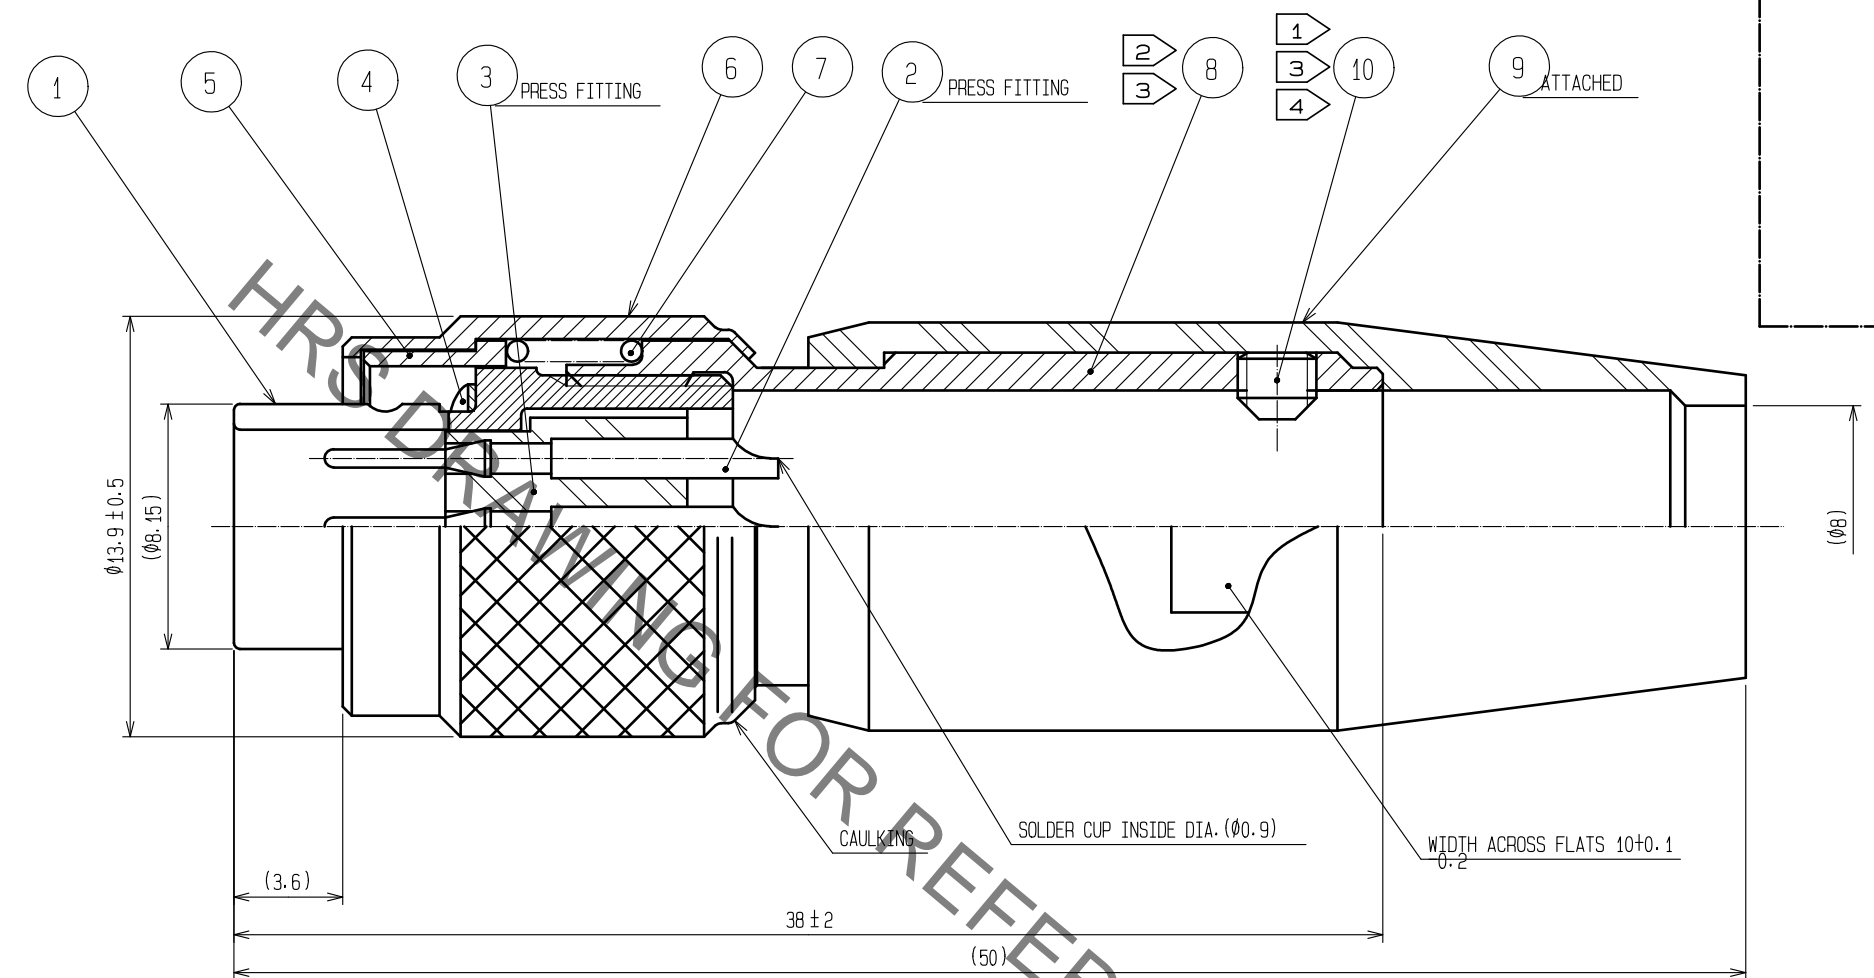

| | | | | | |
|--------------------------------------|------------------|-----------------------------|------------|--|-------------------------|
| 6 | BRASS | MATTE FINISH NICKEL PLATING | | | |
| 5 | STAINLESS STEEL | | 11 | BRASS | |
| 4 | BERYLLIUM COPPER | NICKEL PLATING | 10 | STEEL | NICKEL PLATING |
| 3 | PBT | (BLACK) UL94V-0 | 9 | SIR | (WHITE) |
| 2 | BRASS | ⑥ | 8 | BRASS | NICKLE PLATING |
| 1 | ALUMINUM ALLOY | NICKEL PLATING | 7 | STEEL | NICKLE PLATING |
| NO. | MATERIAL | FINISH . REMARKS | NO. | MATERIAL | FINISH . REMARKS |
| UNITS mm | ⊕ | SCALE 4 : 1 | COUNT 1 | DESCRIPTION OF REVISIONS DIS-C-00005509 | DESIGNED KN. IKEHARA |
| HRS HIROSE ELECTRIC CO., LTD. | | APPROVED : MR. YOSHIDA | 20050105 | DRAWING NO. | EDC-049138-72-72 |
| | | CHECKED : MO. SATOH | 20050105 | PART NO. | MXR-8P-8P(72) |
| | | DESIGNED : YH. YAMADA | 20050105 | CODE NO. | CL0127-0002-3-72 |
| | | DRAWN : YH. YAMADA | 20050105 | | |
| | | DATE | 20210325 | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[MXR-8P-8P\(72\)](#)