
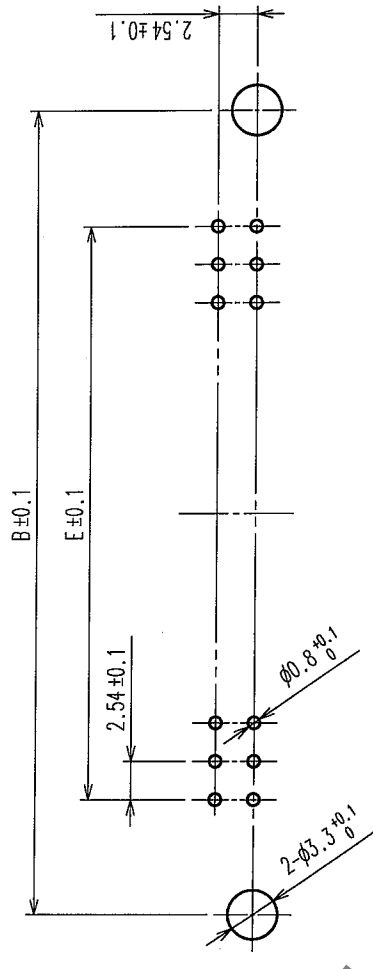
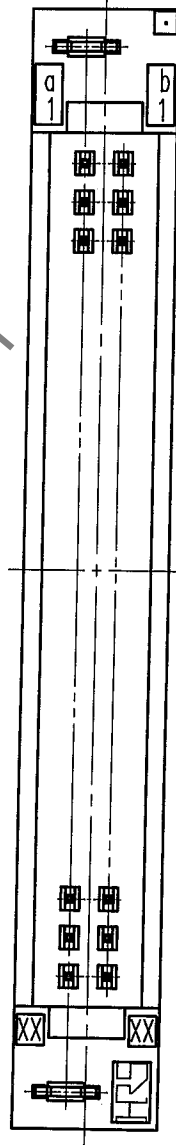
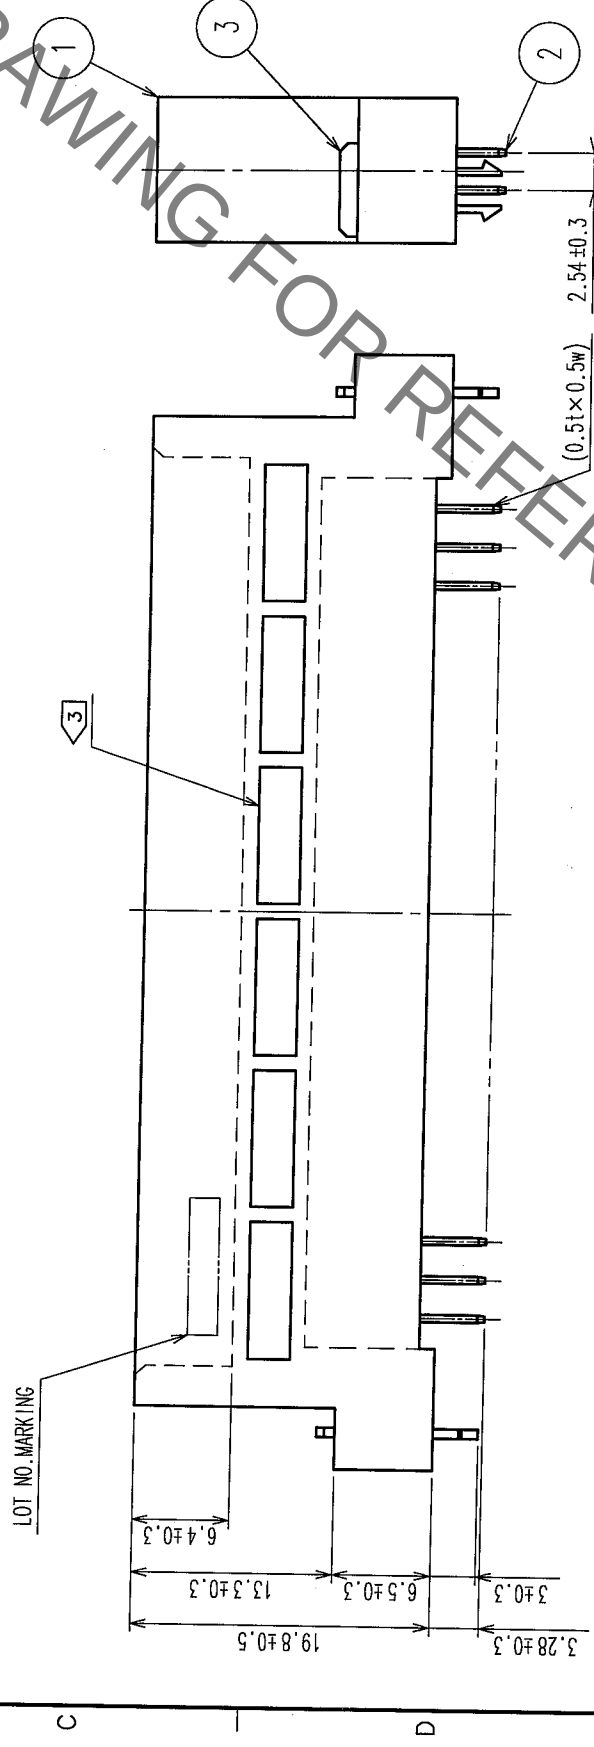


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

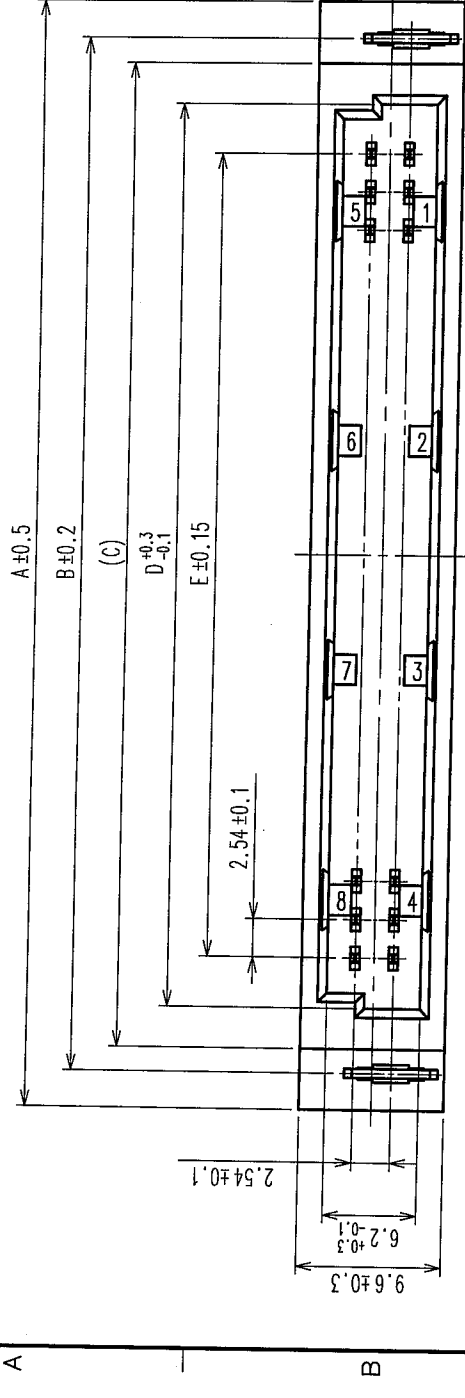

RECOMMENDED P.C.B HOLE PATTERN(t=1.6±0.1)

HRS No.	PART NO.	NUMBER OF CONTACT	A	B	C	D	E
583-0229-0-72	PCN10HB-16P-2.54DSA(72)	16	37.92	33.02	29.79	24.39	17.78
583-0159-6-72	PCN10HB-20P-2.54DSA(72)	20	43.00	38.10	34.87	29.47	22.86
583-0427-3-72	PCN10HB-24P-2.54DSA(72)	24	48.08	43.18	39.95	34.55	27.94
583-0163-3-72	PCN10HB-32P-2.54DSA(72)	32	58.24	53.34	50.11	44.71	38.10
583-0166-1-72	PCN10HB-44P-2.54DSA(72)	44	73.48	68.58	65.35	59.95	53.34
583-0403-5-72	PCN10HB-50P-2.54DSA(72)	50	81.10	76.20	72.97	67.57	60.96

NOTE 1. AS FOR AUG,2005.
2. THE DIMENSION IN PARENTHESIS IS FOR REFERENCE.
3. PREVENTIVE DESIGN FOR HOUSING SINKAGE DIFFERS DEPENDING ON THE NUMBER OF CONTACT POSITIONS.

TO

CODE NO. (OLD) CL	DRAWN M. OGAWA	CHECKED H. SAITOU	DESIGNED H. SAITOU	APPROVED H. SAITOU	RELEASED
SCALE 2 : 1	05.08.29	05.08.29	05.08.29	05.08.30	05.08.30
UNITS mm	PART NO. PCN10HB-2.54DSA(72)				
DRAWING NO. EDC3-154687-01					
CODE NO. CL583					
HIROSE ELECTRIC CO., LTD.					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[PCN10HB-20P-2.54DSA\(72\)](#)