

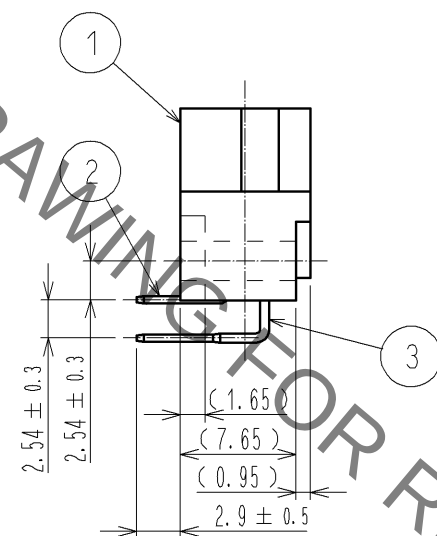
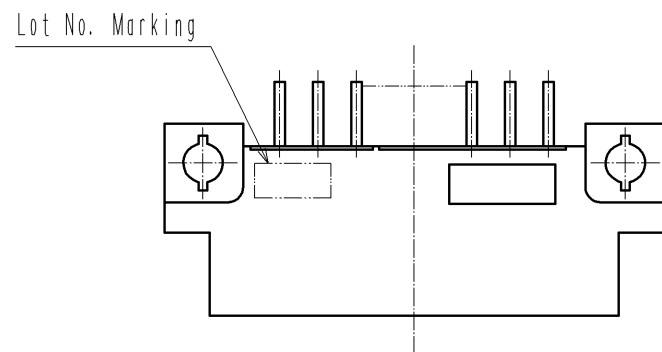
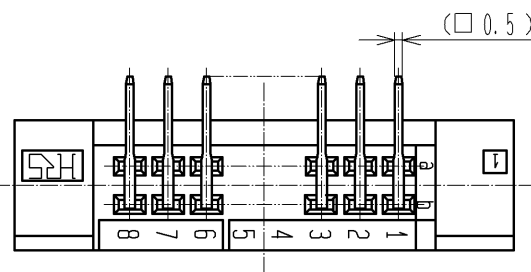
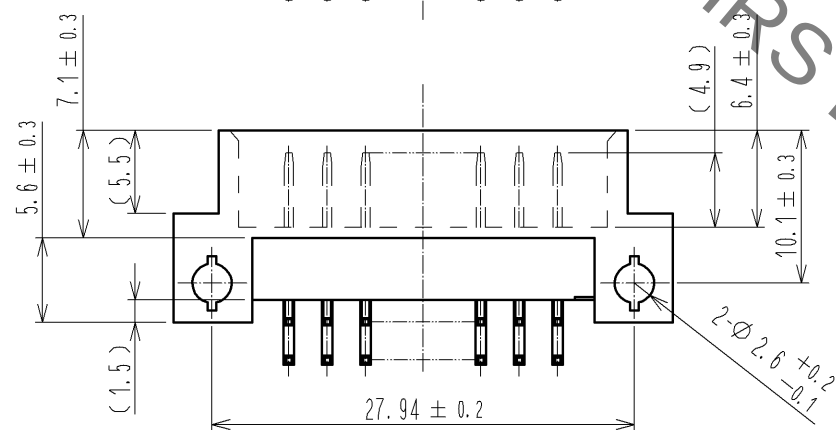


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

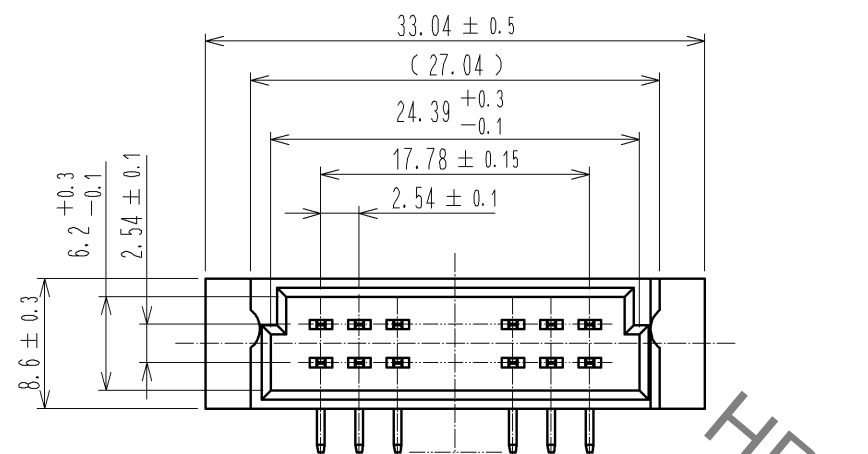

RECOMMENDED PC BOARD HOLE PATTERN($t=1.6\pm0.1$)

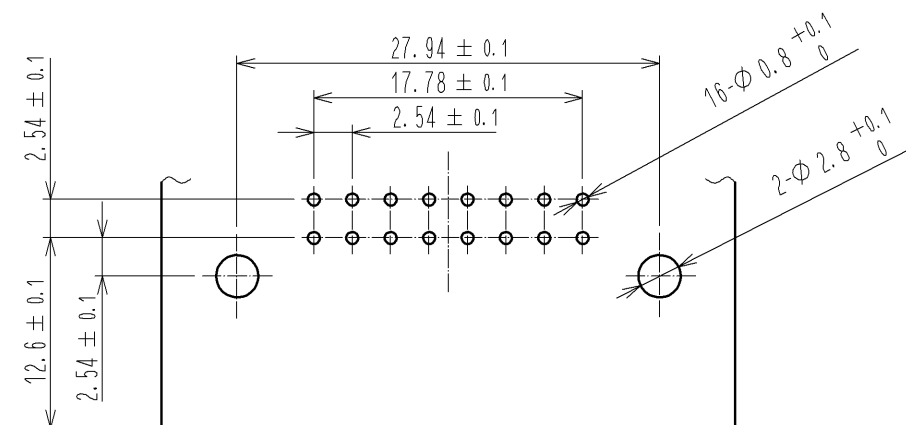

1	PBT	BEIGE UL94V-0	2, 3	BRASS	CONTACT AREA: Ni2.5 μ m+Au0.1 μ m
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	DIP AREA: Ni2.5 μ m+Sn2 μ m
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
	HIROSE ELECTRIC CO., LTD.	APPROVED : HS. OKAWA	14.01.08	DRAWING NO.	EDC3-019795-01
		CHECKED : HT. YAMAGUCHI	14.01.08	PART NO.	PCN12A-16P-2.54DS(71)
		DESIGNED : KJ. NISHIWAKI	14.01.08	CODE NO.	CL583-2011-6-71
		DRAWN : KJ. NISHIWAKI	14.01.08		1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[PCN12A-16P-2.54DS\(71\)](#)