
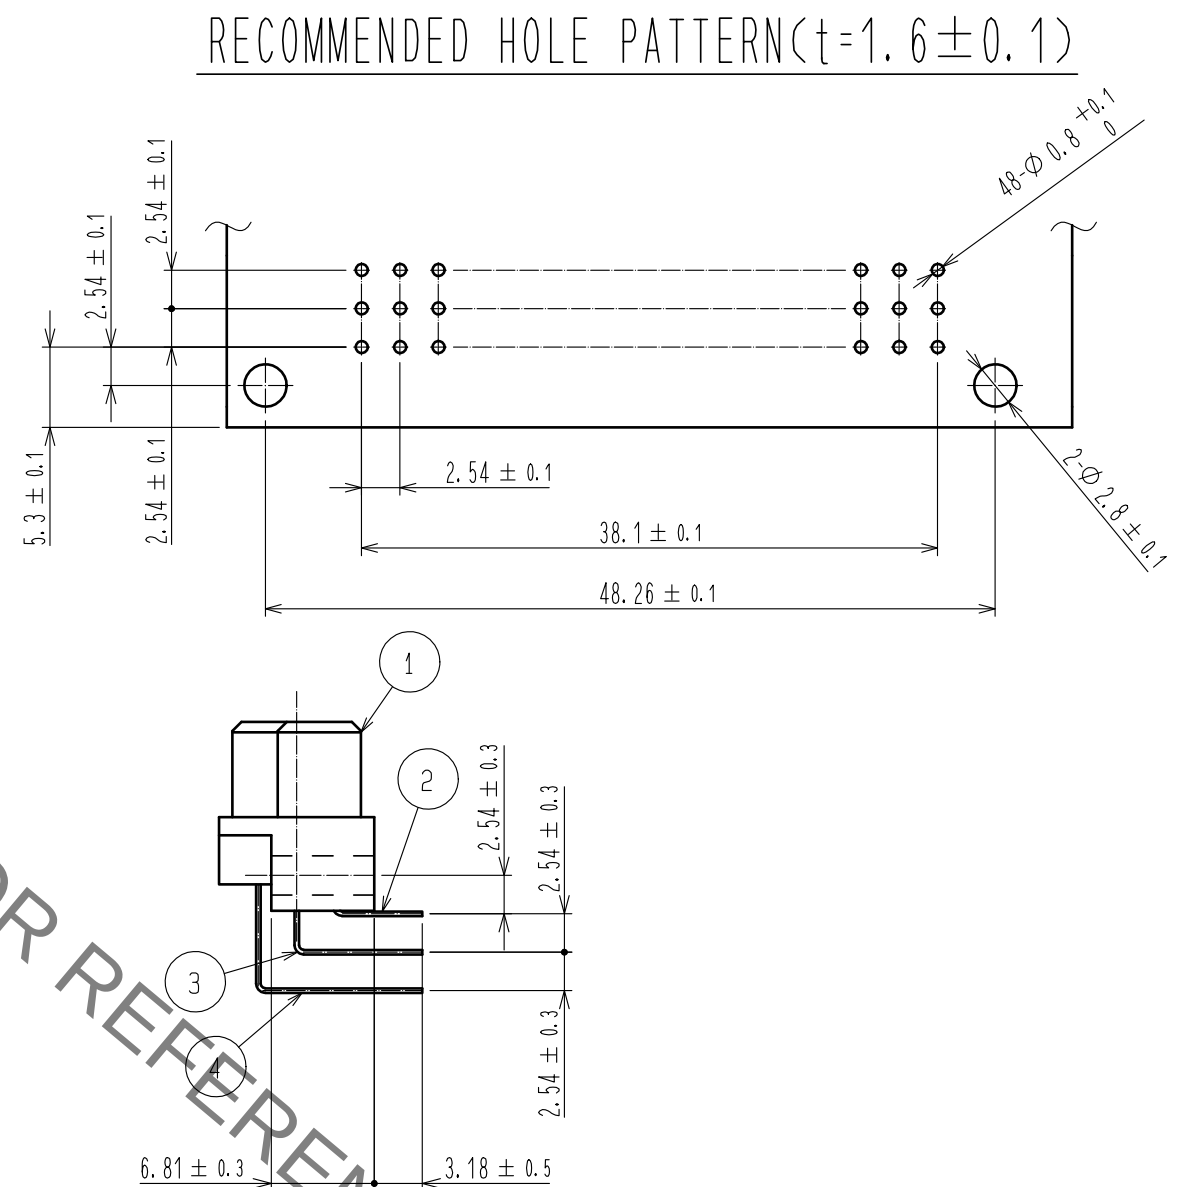


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

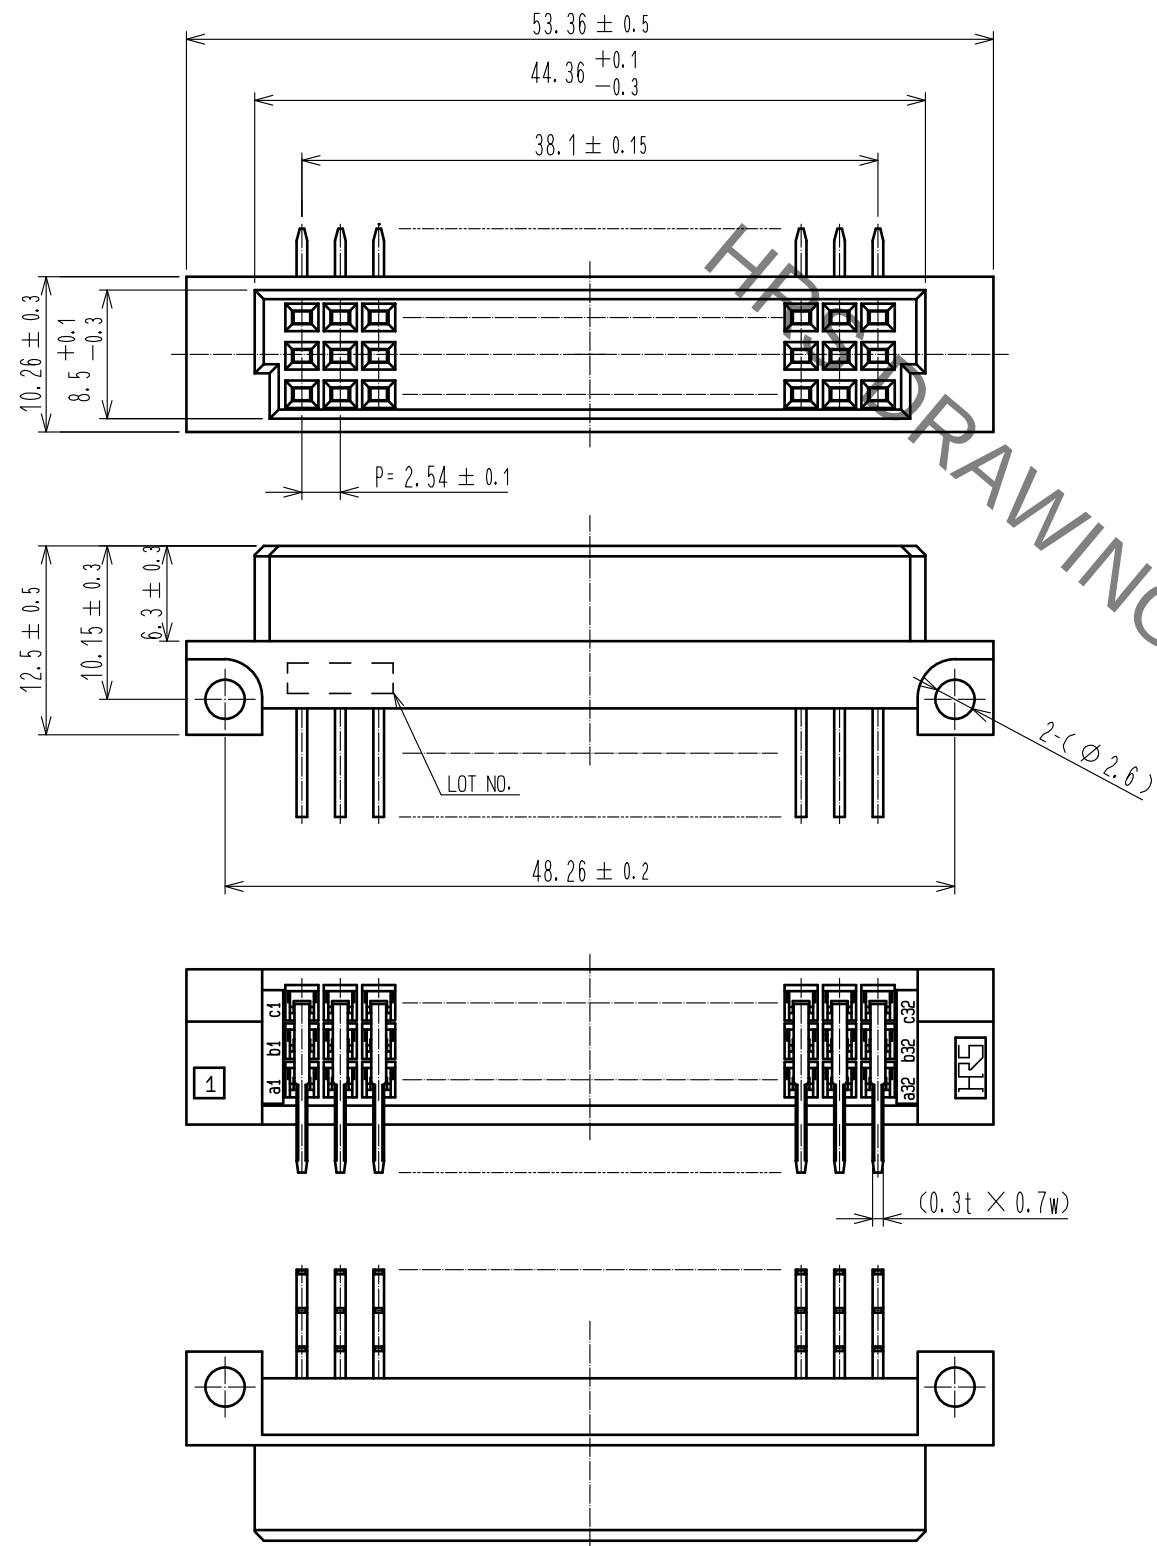

1	PBT	Beige (UL94V-0)	4	Copper alloy	Contact: Gold Plating $0.1\mu\text{m}$ min.
			3		Lead : Tin Plating $1\mu\text{m}$ min.
			2		Under : Nickel Plating $1\mu\text{m}$ min.
NO.	MATERIAL	FINISH. REMARKS	NO.	MATERIAL	FINISH. REMARKS
OVER	TO	TOLERANCE	SCALE	2 : 1	DESCRIPTION OF REVISIONS
6	18	± 0.3	ANGULAR	$\pm 1^\circ$	APPROVED : NH. NAKATA 20181109
18	50	± 0.5			CHECKED : HT. YAMAGUCHI 20181108
50	125	± 0.7			DESIGNED : MT. ITANO 20181108
		± 1			DRAWN : YY. YOSHIHARA 20181108
ASSEMBLY DRAWING			DRAWING NO. EDC-021154-71-00		
			PART NO. PCN13-48S-2.54DS(71)		
			CODE NO. CL583-3040-0-71		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[PCN13-48S-2.54DS\(71\)](#)