
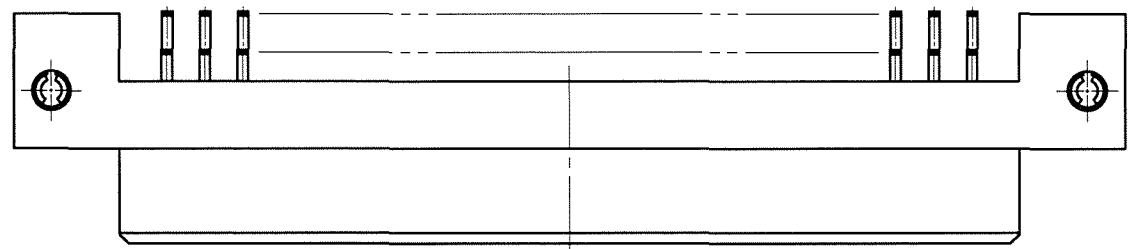
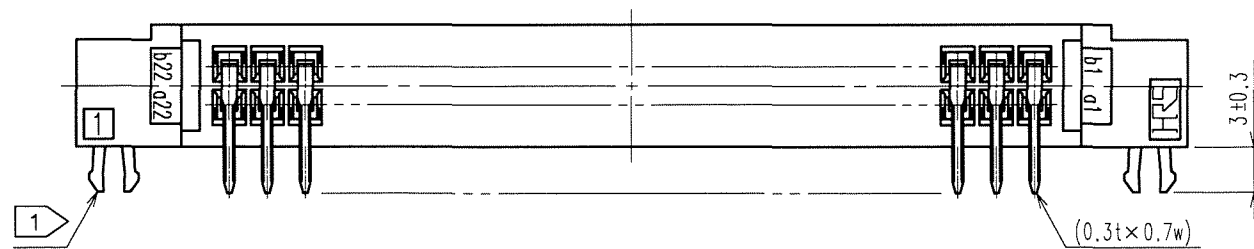
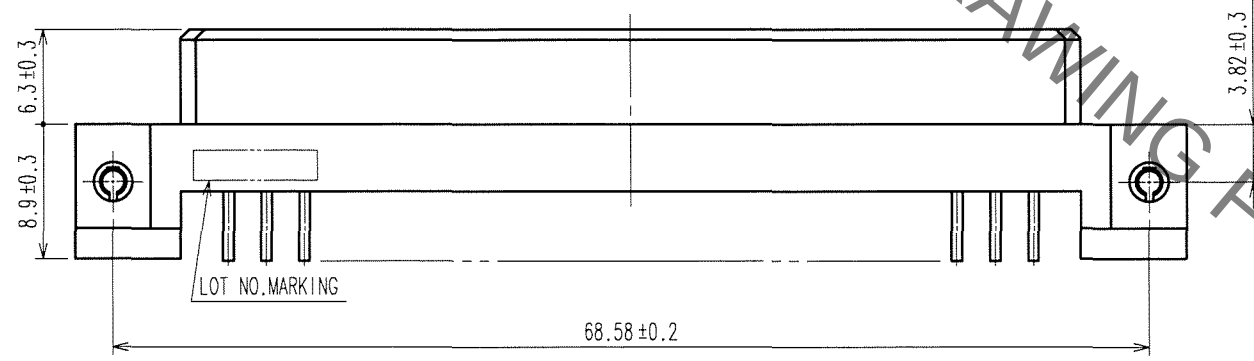


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO


A
B
C
D
E
F

1 2 3 4

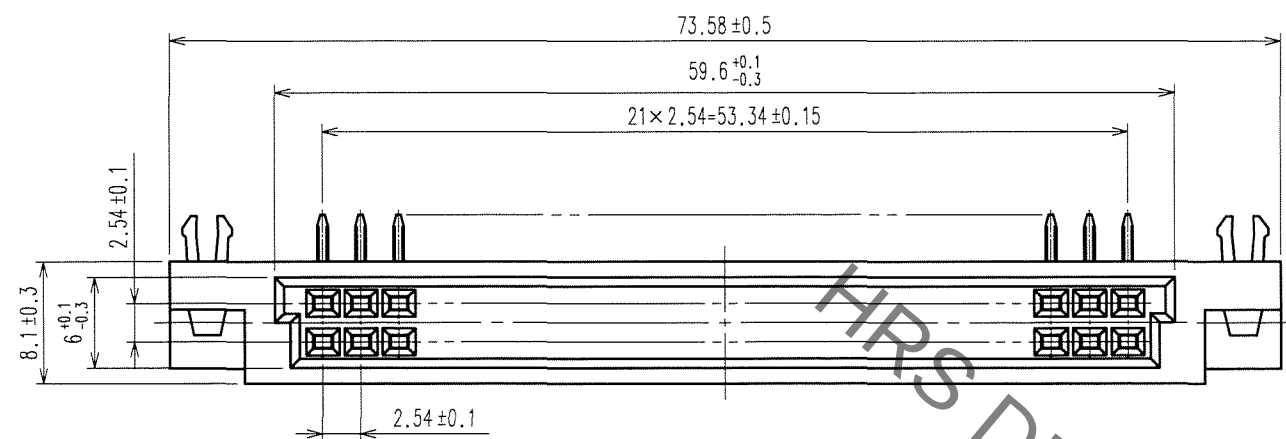


1 2 3 4

5				6				7				8			
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT
△				. .	△				. .	△				. .	△
△				. .	△				. .	△				. .	△
△				. .	△				. .	△				. .	△

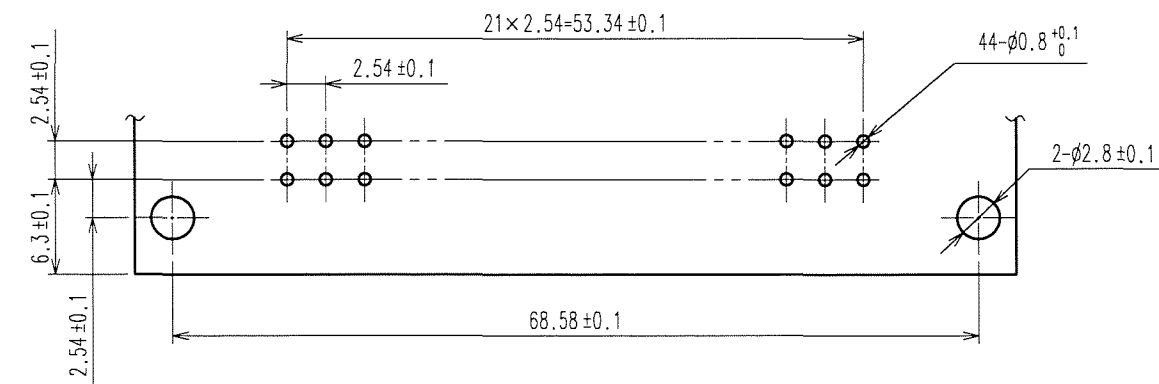

RECOMMENDED PC BOARD HOLE PATTERN (t=1.6±0.1)

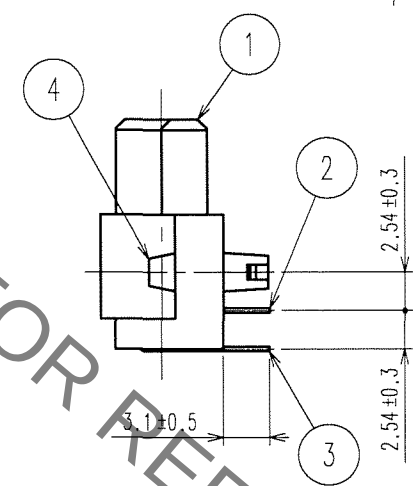

NOTE 1 THE ORIENTATION OF THE LOCK PINS IS OPTIONAL.

4	PHOSPHOR BRONZE	Ni1μm+Sn1μm
2,3	COPPER ALLOY	(CONTACT AREA)Ni1μm+Au0.1μm (OTHERS)Ni1μm+Sn2μm
1	PBT	BEIGE UL94V-0
NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN H.Saitou 07.01.16	DESIGNED H.Saitou 07.01.16	CHECKED <i>S. Tomioka</i> 07.01.16	APPROVED <i>K. Hayama</i> 07.01.16	RELEASED
SCALE 2:1	DRAWING NO. EDC3-020723-01	PART NO. PCN13E-44S-2.54DS(71)	CODE NO. CL583-3050-3-71		
UNITS mm	HRS HIROSE ELECTRIC CO., LTD.		1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[PCN13E-44S-2.54DS\(71\)](#)