


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

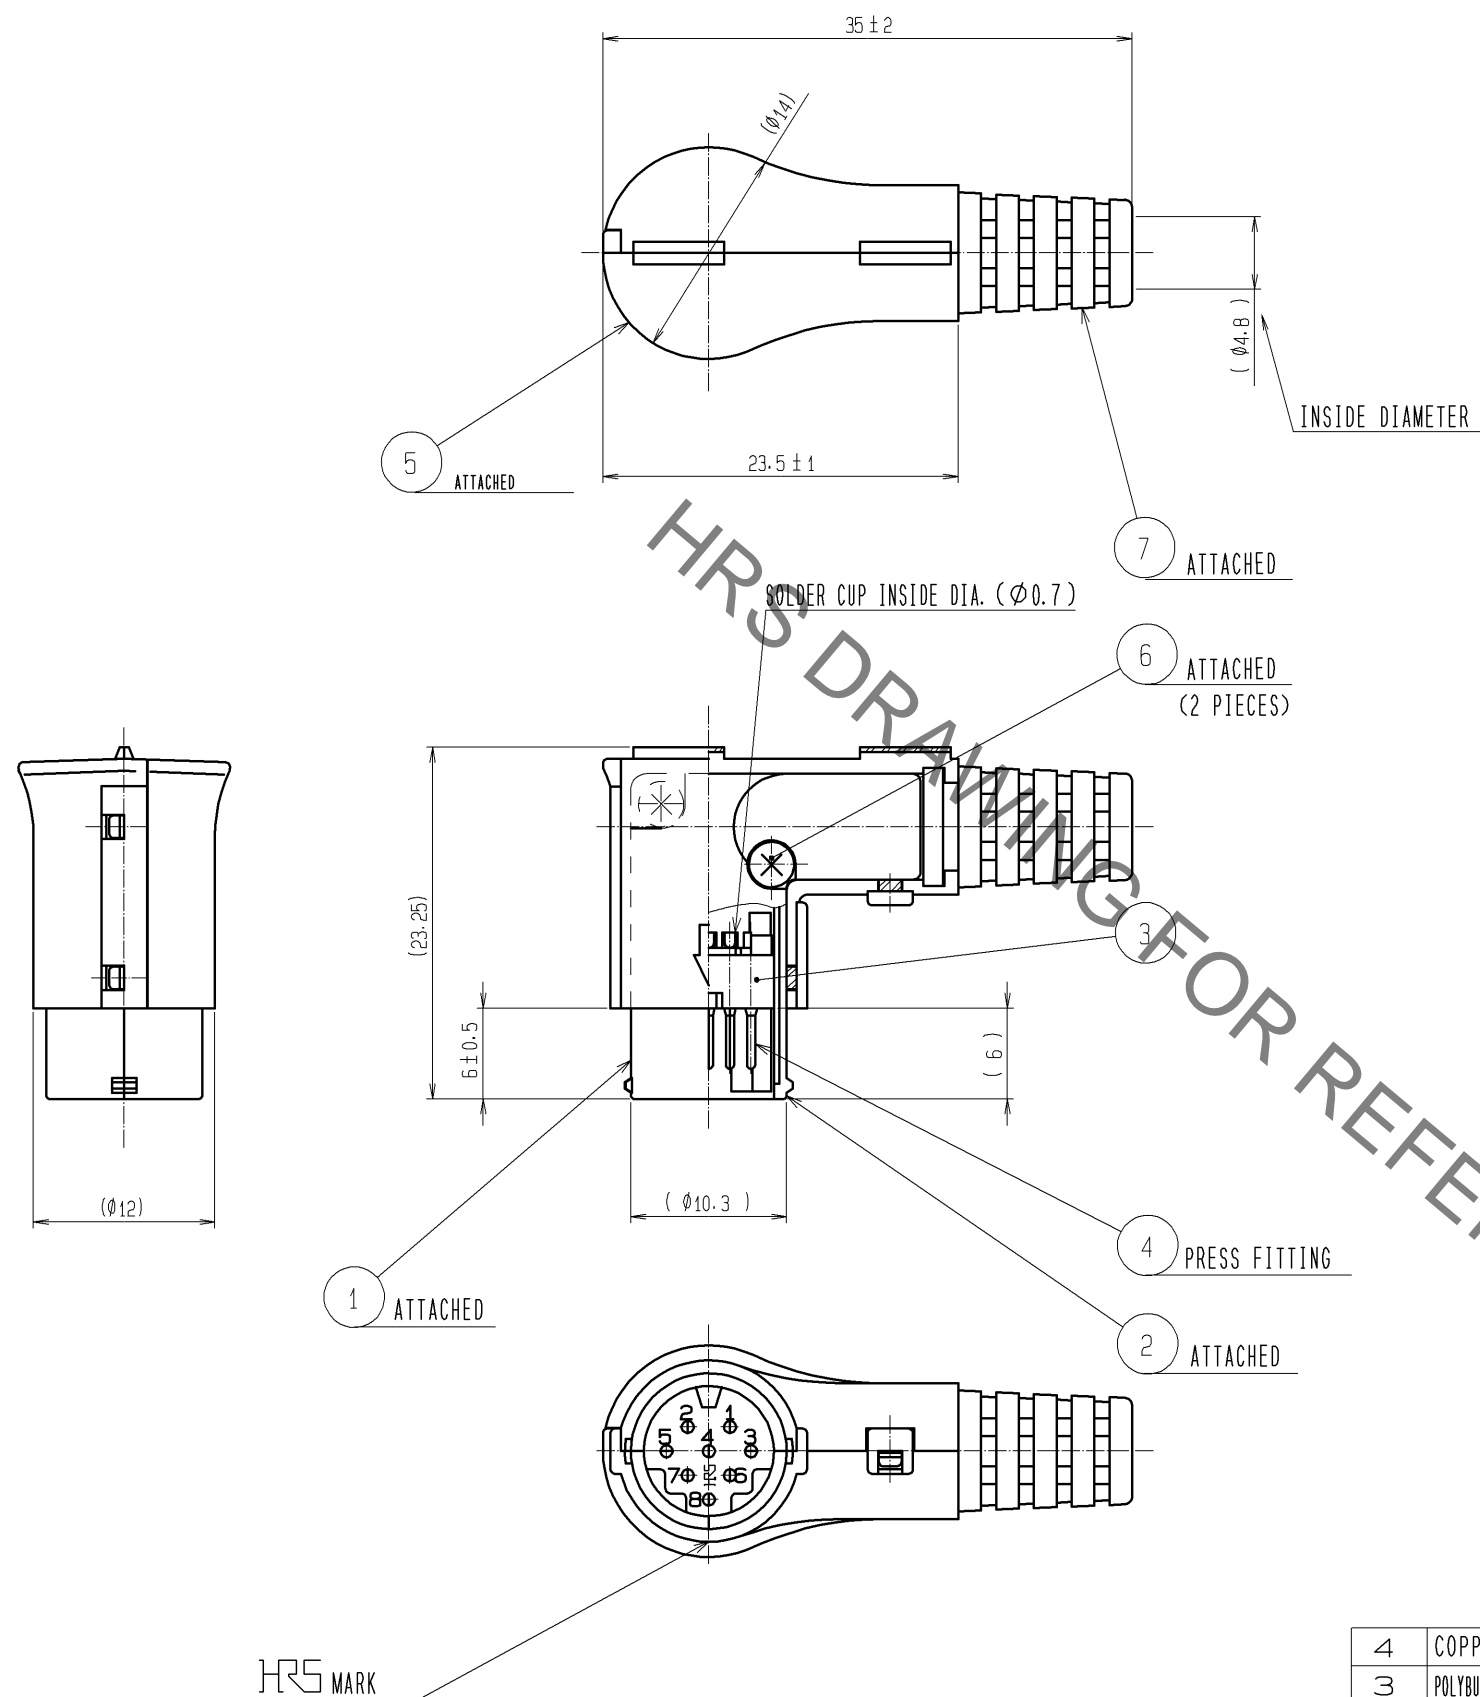

- NOTES 1 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.
- 2 SURFACE PLATING : TIN-PLATING  $1\mu\text{m}$  min.  
UNDER PLATING : NICKEL PLATING  $1\mu\text{m}$  min.

4	COPPER ALLOY					
3	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	7	POLYVINYLCHLORIDE	(BLACK) UL94V-0	
2	ZINC ALLOY	NICKEL PLATING	6	STEEL	NICKEL PLATING	TAPPING SCREW M2X4
1	ZINC ALLOY	NICKEL PLATING	5	POLYPROPYLENE	(BLACK) UL94V-0	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII		12.06.06	DRAWING NO.	EDC3-043311-71		
		CHECKED : EJ. KUNII		12.06.06	PART NO.	HR212-10LP-8P(71)		
		DESIGNED : HY. KISHI		12.06.06	CODE NO.	CL112-4002-6-71		
		DRAWN : HY. KISHI		12.06.06	1/1			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR212-10LP-8P\(71\)](#)