



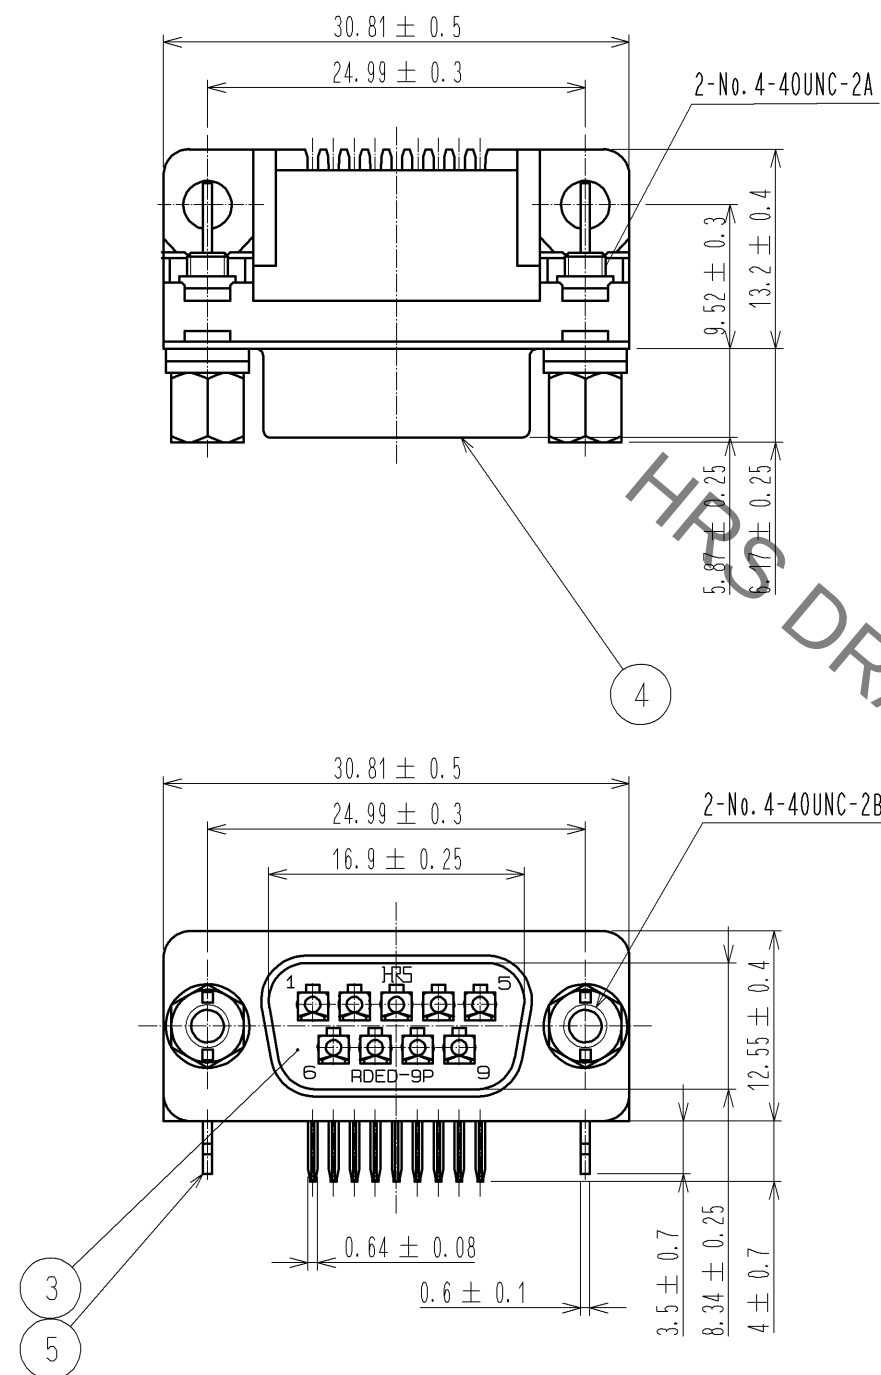


RECOMMENDED PC BOARD PATTERN(MOUNTING SIDE) (1:1)

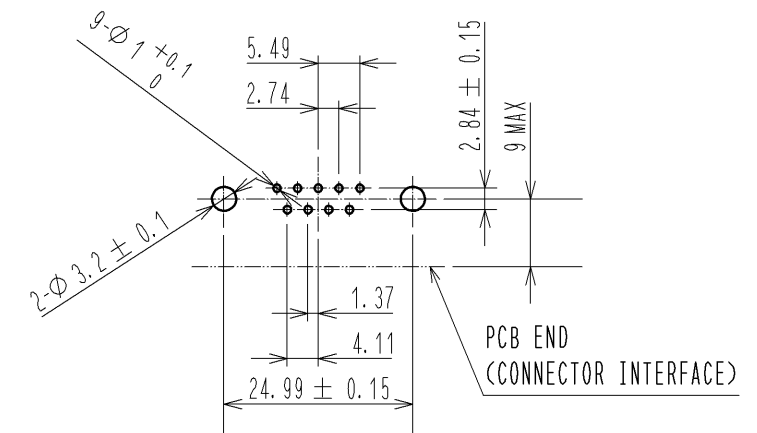

NOTE 1. TOLERANCES TO BE ± 0.1 UNLESS OTHERWISE SPECIFIED.
2. THICKNESS OF PC BOARD SHALL BE 1.6mm.

PATTERN OF MOUNTING CONNECTOR ON PANEL

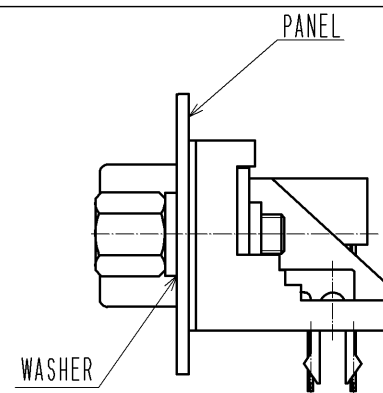

BECAUSE THE EFFECTIVE MATING LENGTH CHANGE
DEPENDS ON THE THICKNESS OF PANEL.
WHEN THE THICKNESS OF PANEL IS 0.8 TO 1.2mm
ONE OF PLAIN WASHER SHALL BE USED AND WHEN
THE THICKNESS OF PANEL 1.6mm, THE PLAIN WASHER
SHALL NOT BE USED.

3	PBT	BLACK, UL94V-0	7	STEEL	OVER :NICKEL PLATING 2μm MIN UNDER: COPPER PLATING 1μm MIN
2	PHOSPHOR BRONZE	CONTACT:GOLD PLATING 0.2μm MIN LEAD :GOLD PLATING 0.03μm MIN UNDER :NICKEL PLATING 2μm MIN	6	STEEL	OVER :NICKEL PLATING 2μm MIN UNDER: COPPER PLATING 3μm MIN
1	PHOSPHOR BRONZE	CONTACT:GOLD PLATING 0.2μm MIN LEAD :GOLD PLATING 0.03μm MIN UNDER :NICKEL PLATING 2μm MIN	5	PHOSPHOR BRONZE	OVER :TIN PLATING 3μm MIN UNDER:NICKEL PLATING 2μm MIN
			4	STEEL	OVER :NICKEL PLATING 1μm MIN UNDER: COPPER PLATING 5μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2:1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
APPROVED :RI. TAKAYASU	11. 01. 26	DRAWING NO.	EDC3-021970-01		
CHECKED :YH. ENAMI	11. 01. 26	PART NO.	RDED-9PE-LNA(4-40)(55)		
DESIGNED :MT. ITANO	11. 01. 25	CODE NO.	CL211-0495-5-55		
DRAWN :MK. SHOJI	11. 01. 25				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RDED-9PE-LNA\(4-40\)\(55\)](#)