

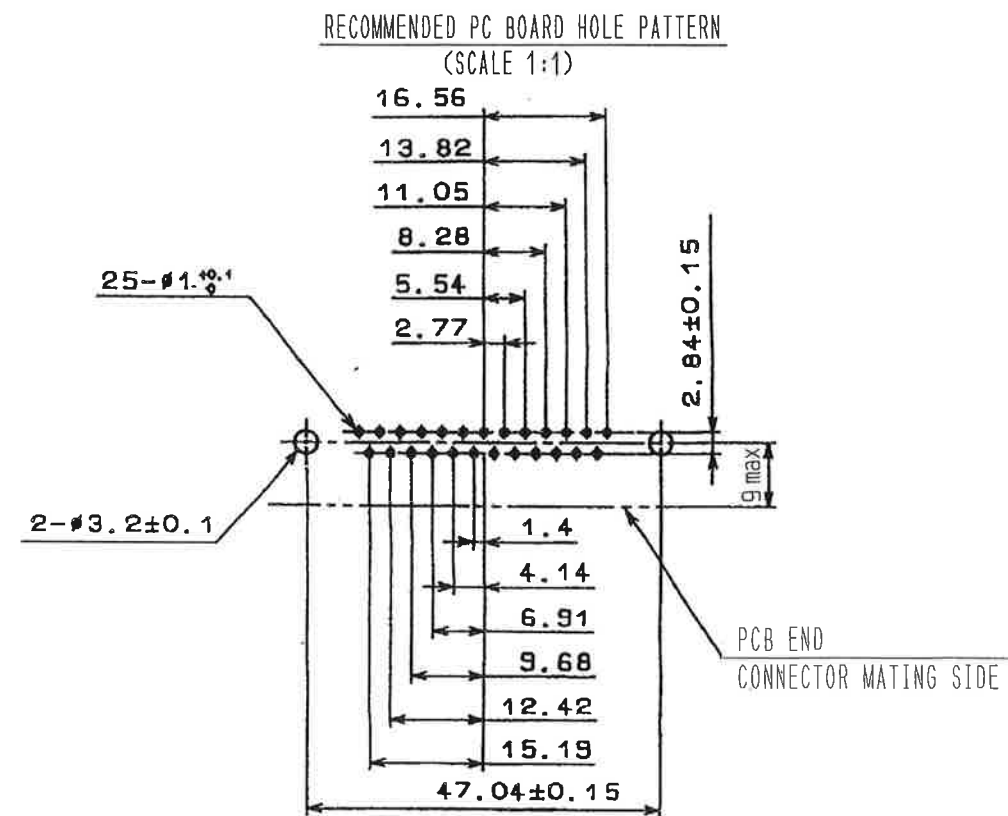
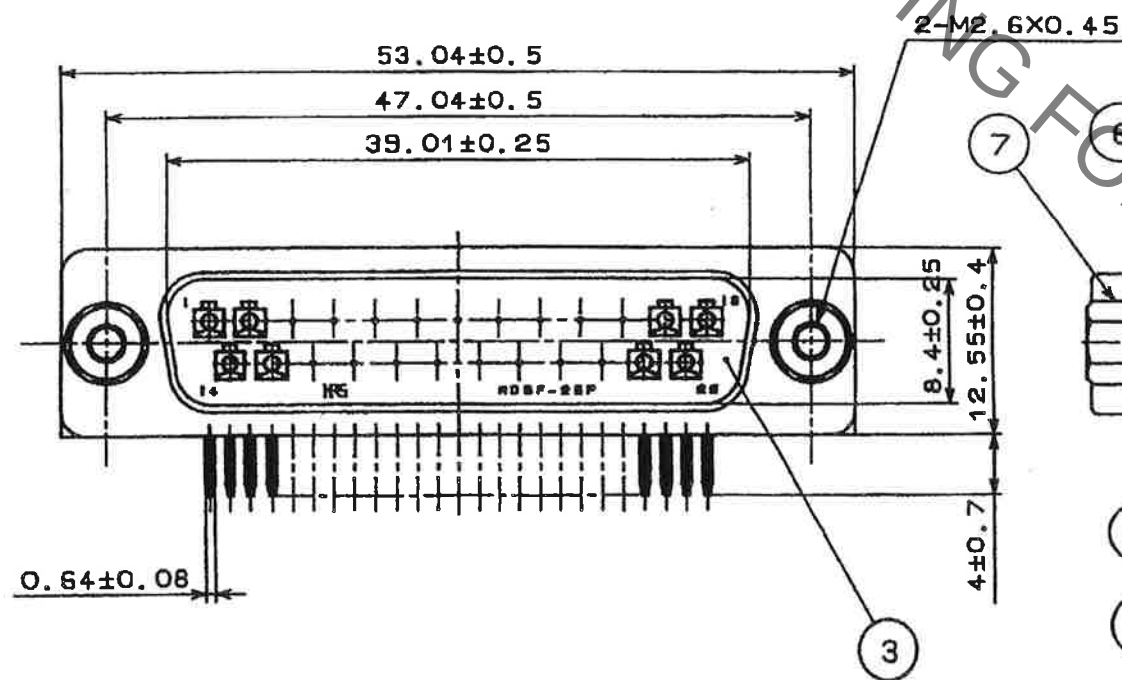


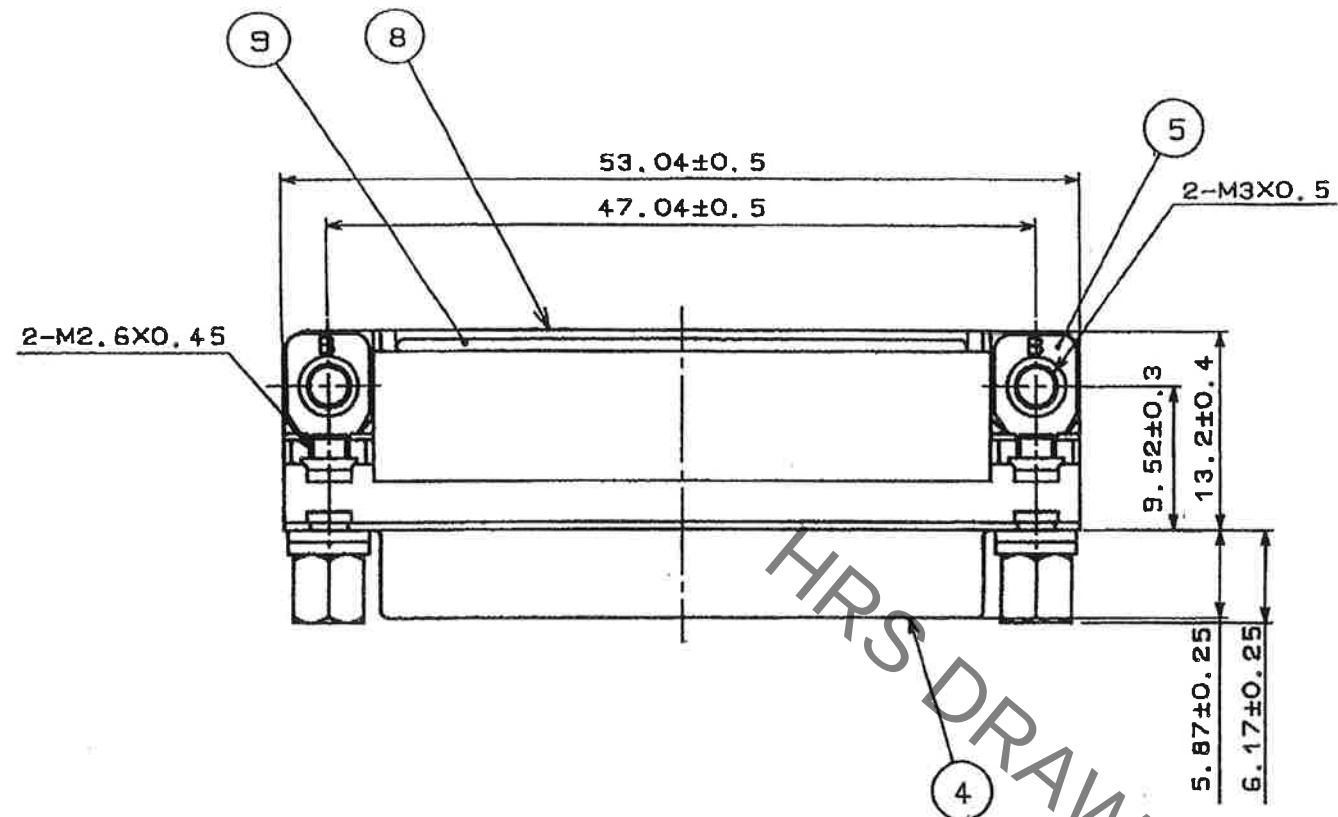

NOTE. 1. PLEASE KEEP THE TOLERANCE TO LESS THAN ± 0.1 FOR THE DIMENSIONS WITHOUT TOLERANCE.

PATTERN OF MOUNTING CONNECTOR ON PCB

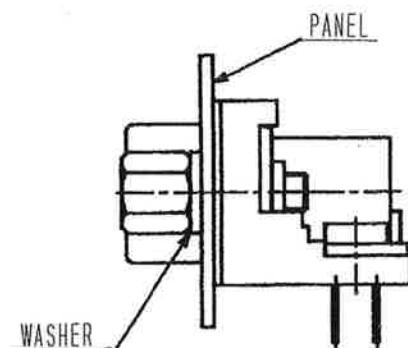

REMOVE ONE WASHER FOR 0.8 TO 1.2 OF PANEL THICKNESS.
REMOVE TWO WASHERS FOR 1.6 OF PANEL THICKNESS.

4	STEEL	NICKEL PLATING 1 μ m min UNDER PLATING : COPPER PLATING 5 μ m min	9	FERRITE	
3	PBT	BLACK, UL94V-0	8	PBT	BLACK, UL94V-0
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.2 μ m min LEAD AREA : GOLD PLATING 0.03 μ m min UNDER PLATING : NICKEL PLATING 2 μ m min	7	STEEL	NICKEL PLATING 2 μ m min UNDER PLATING : COPPER PLATING 1 μ m min
1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.2 μ m min LEAD AREA : GOLD PLATING 0.03 μ m min UNDER PLATING : NICKEL PLATING 2 μ m min	6	STEEL	NICKEL PLATING 2 μ m min UNDER PLATING : COPPER PLATING 3 μ m min
			5	STEEL	NICKEL PLATING 2 μ m min UNDER PLATING : COPPER PLATING 1 μ m min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU 18.06.12	DRAWING NO. EDC-041237-50-00		
		CHECKED : RI. TAKAYASU 18.06.12	PART NO. RDBF-25P-LNA<50>		
		DESIGNED : TS. ITO 18.06.12	CODE NO. CL211-5000-8-50		
		DRAWN : TS. ITO 18.06.12			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RDBF-25P-LNA\(50\)](#)