
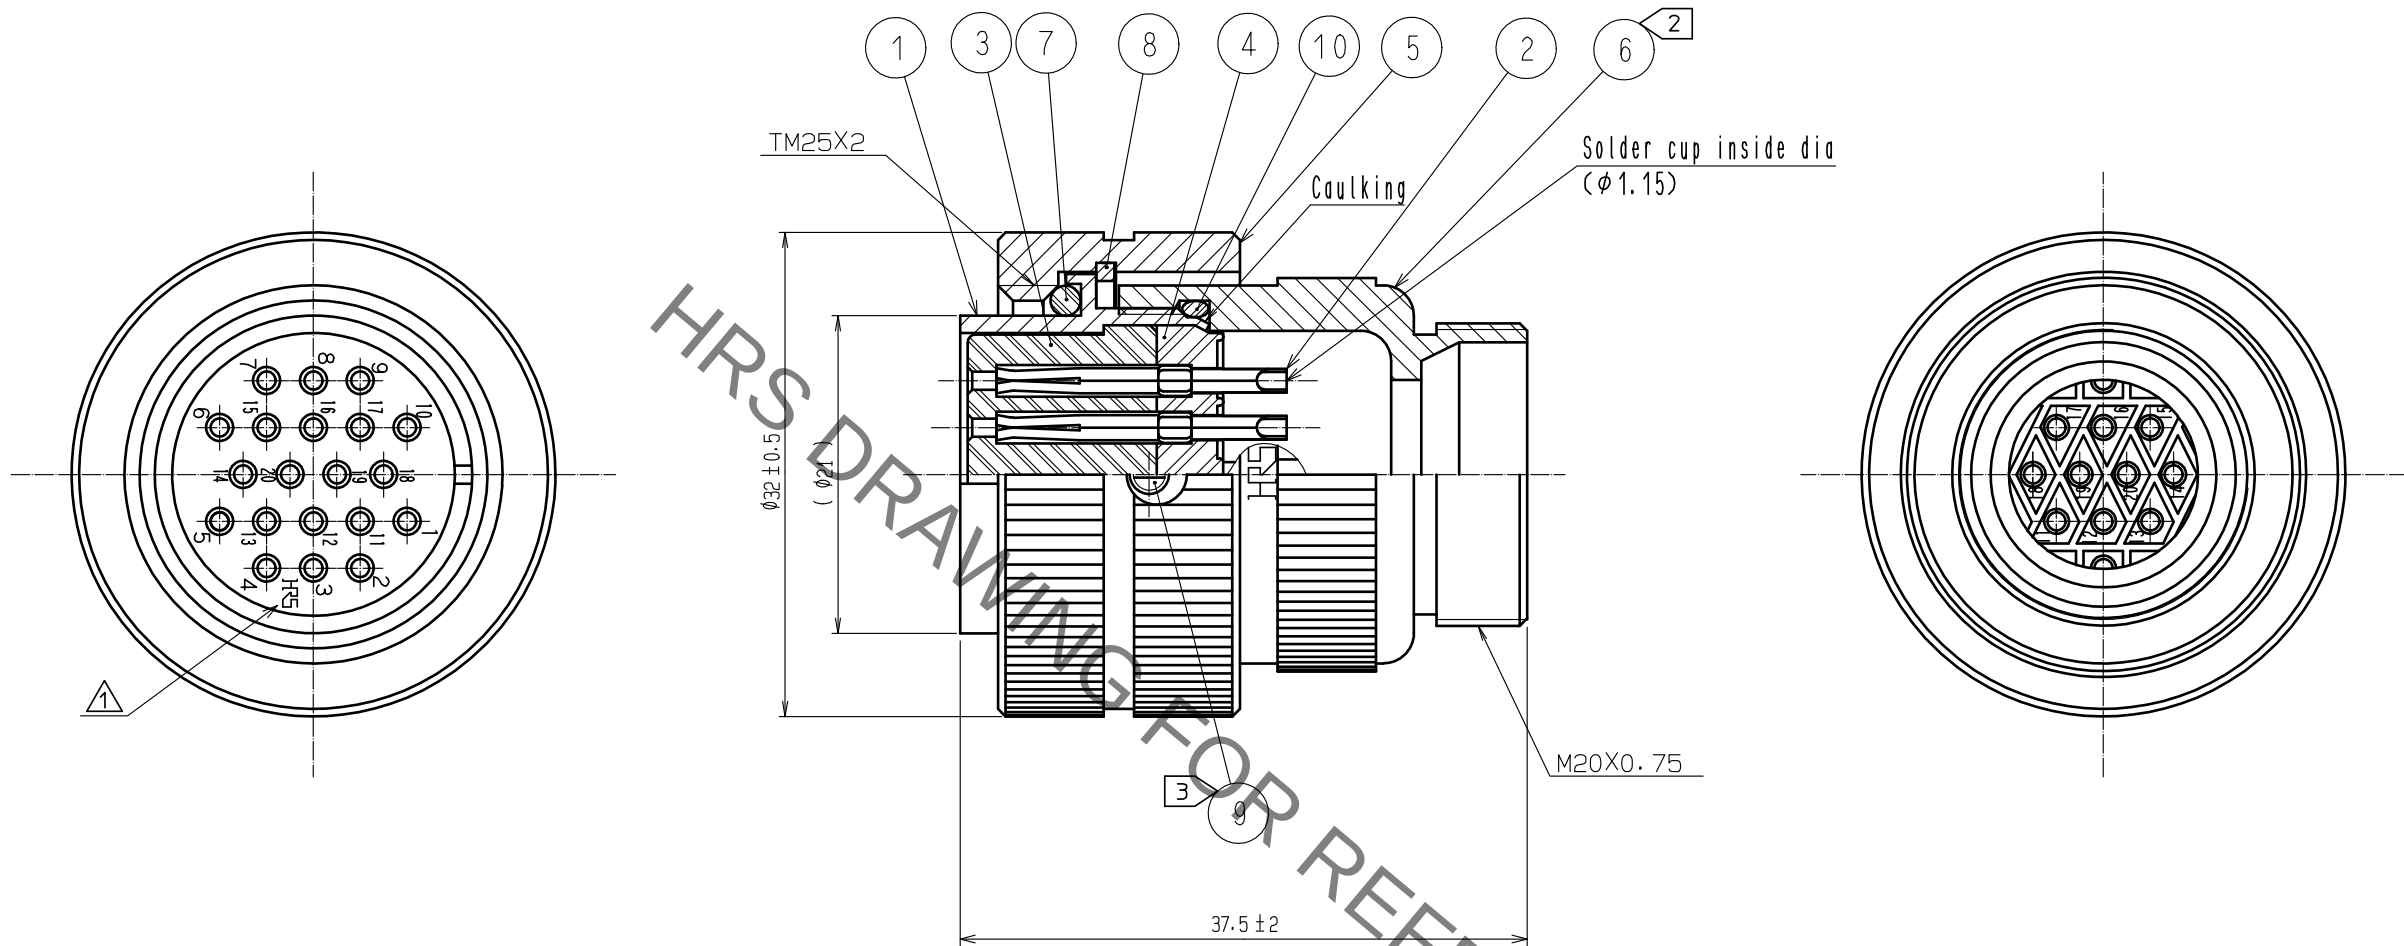




- NOTES
- 1 ONE EXAMPLE OF THE ROTATION OF REF. ⑥ TO REF. NO. ① IS SHOWN.
 - 2 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑥ SHALL BE 2 TO 3N · m.
 - 3 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ③ SHALL BE 0.2 TO 0.3N · m.
 - 4 THIS PRODUCTS TO BE USED WITH CABLE CLAMP, RM21WTP-CP(*) (71).
*DESIGNATE DIAMETER(mm) OF APPLICABLE CABLE.

5	BRASS	NICKEL PLATING	10	CHLOROPRENE RUBBER	(BLACK)
4	PPS	(BLACK) UL94V-0	9	BRASS	NICKEL PLATING
3	PPS	(BLACK) UL94V-0	8	PHOSPHOR BRONZE	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5μm min.	7	CHLOROPRENE RUBBER	(BLACK)
1	BRASS	NICKEL PLATING	6	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1	 1	DIS-C-00003596	TH. KAMEYA	HY. KOBAYASHI	20191028

 HIROSE ELECTRIC CO., LTD.	APPROVED	: HY. KOBAYASHI	20180222	DRAWING NO.	EDC-110103-31-00
	CHECKED	: HY. KOBAYASHI	20180222		
	DESIGNED	: HY. KISHI	20180222	CODE NO.	CL109-1402-5-31
	DRAWN	: MK. INOUE	20180208		

 1	1
---	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RM21WTP-20S\(31\)](#)