


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓				• •	✓				• •
✓				• •	✓				• •
✓				•	✓				

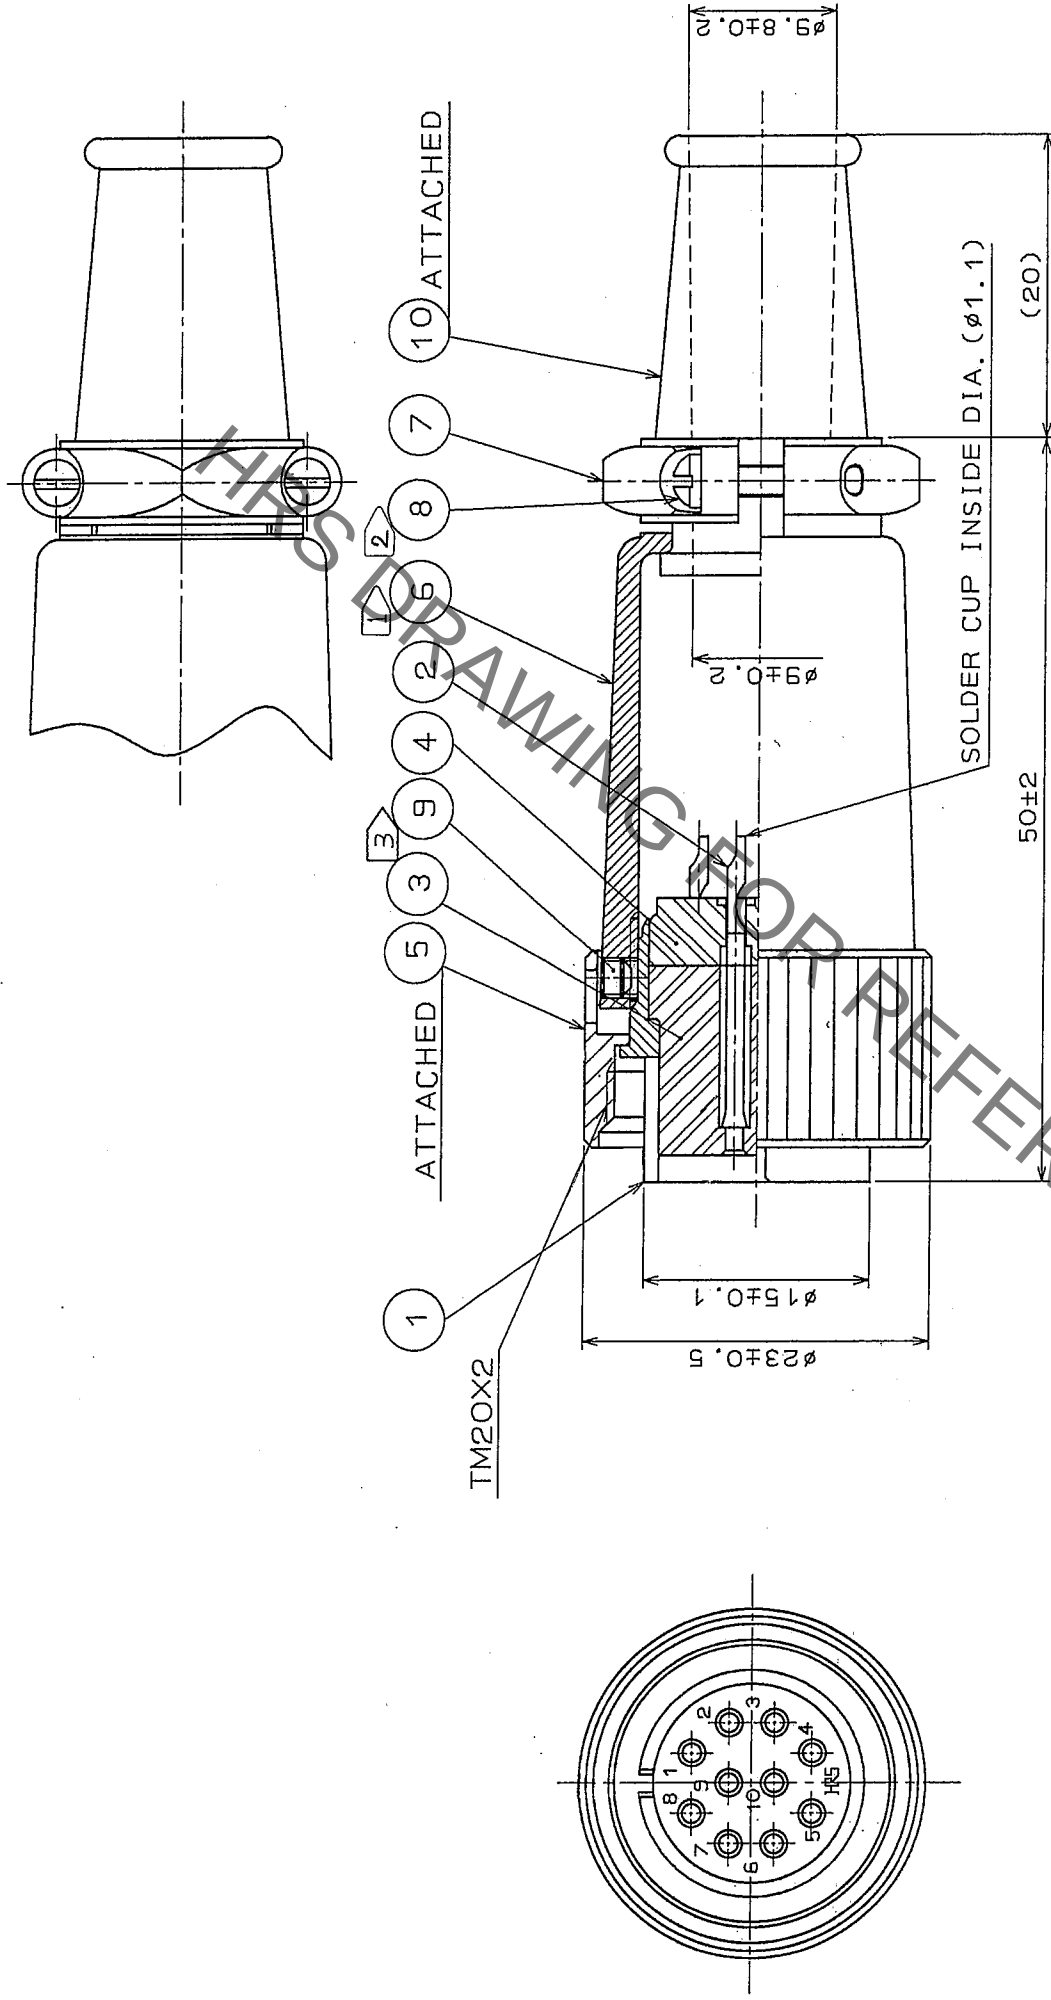

- NOTES

 - ① THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑥ TO BE 2 TO 3 N · m.
 - ② THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑧ TO BE 0.12 TO 0.15 N · m.
 - ③ THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑨ TO BE 0.3 TO 0.4 N · m.

RECOMMENDED ADHESIVE TO PREVENT LOOSENESS OF THE SCREW FOR REF.NO. ⑨
: PRODUCT NO. LOCTITE 242.

4 ROTATION EXAMPLES OF REF. NO. ① AND ⑥ ARE SHOWN.

5	BRASS	MATTE FINISH CHROME PLATE	10	CR	(BLACK)	HEXAGON SOCKET SET SCREW M6.0X.45X2
4	DIALYL PHTHALATE	(BLACK) UL94V-0	9	STEEL	NICKEL PLATING	
3	DIALYL PHTHALATE	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING	
2	COPPER ALLOY	SILVER PLATING 5 μm min.	7	ALUMINUM ALLOY	MATTE FINISH ALUMITE (CHROME)	
1	ZINC ALLOY	MATTE FINISH CHROME PLATE	6	ALUMINUM ALLOY	MATTE FINISH ALUMITE (CHROME)	
NO.	MATERIAL	FINISH., REMARKS	NO.	MATERIAL	FINISH., REMARKS	
CODE NO. (OLD)						
DRAWING NO.						
EDC3-007608-71						
PART NO.						
RM15TPD-10S(71)						
CODE NO.						
CL109-0686-9-71						
UNITS						
mm						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RM15TPD-10S\(71\)](#)