
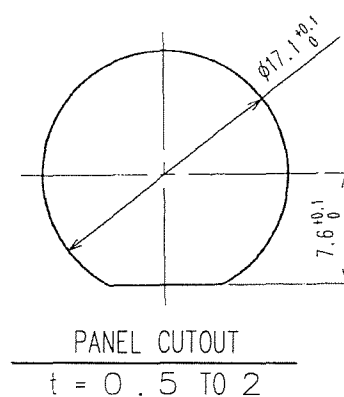


Jan.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

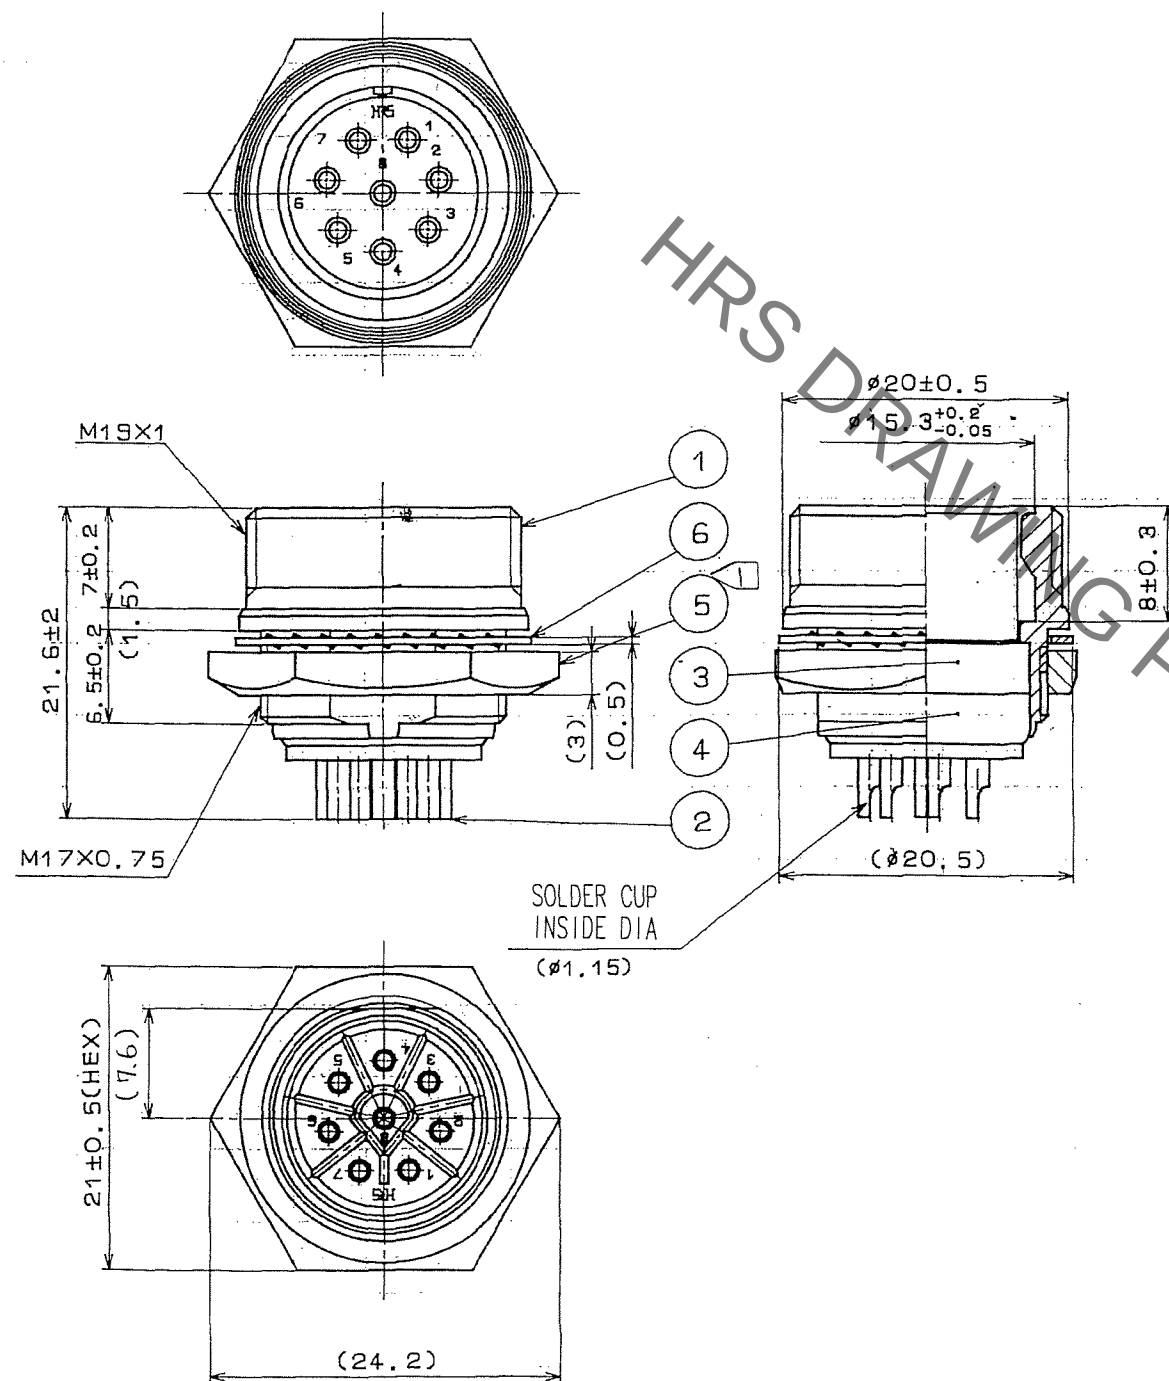

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑤ : $3\text{N} \cdot \text{m}$.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF.NO.⑤ FROM LOOSENING.

3	Diallyl Phthalate	(BLACK) UL94V-0	6	Phosphor Bronze	Nickel Plating
2	Copper Alloy	Silver Plating $5\mu\text{m min.}$	5	Brass	Nickel Plating
1	Zinc Alloy	Nickel Plating	4	Diallyl Phthalate	(BLACK) UL94V-0
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO.(OLD) CL			DRAWN	DESIGNED	CHECKED
			J. Komatsu	J. Komatsu	E. Kunita
			06.09.14	06.09.14	06.09.14
					M. Sato
					06.09.15
DRAWING NO. EDC3-028518-71			PART NO. RM15TRH-8S(71)		
SCALE 2 : 1			CODE NO. CL109-0868-6-71		
UNITS mm			1/1		
HRS			HIROSE ELECTRIC CO., LTD		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RM15TRH-8S\(71\)](#)