


Jan.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

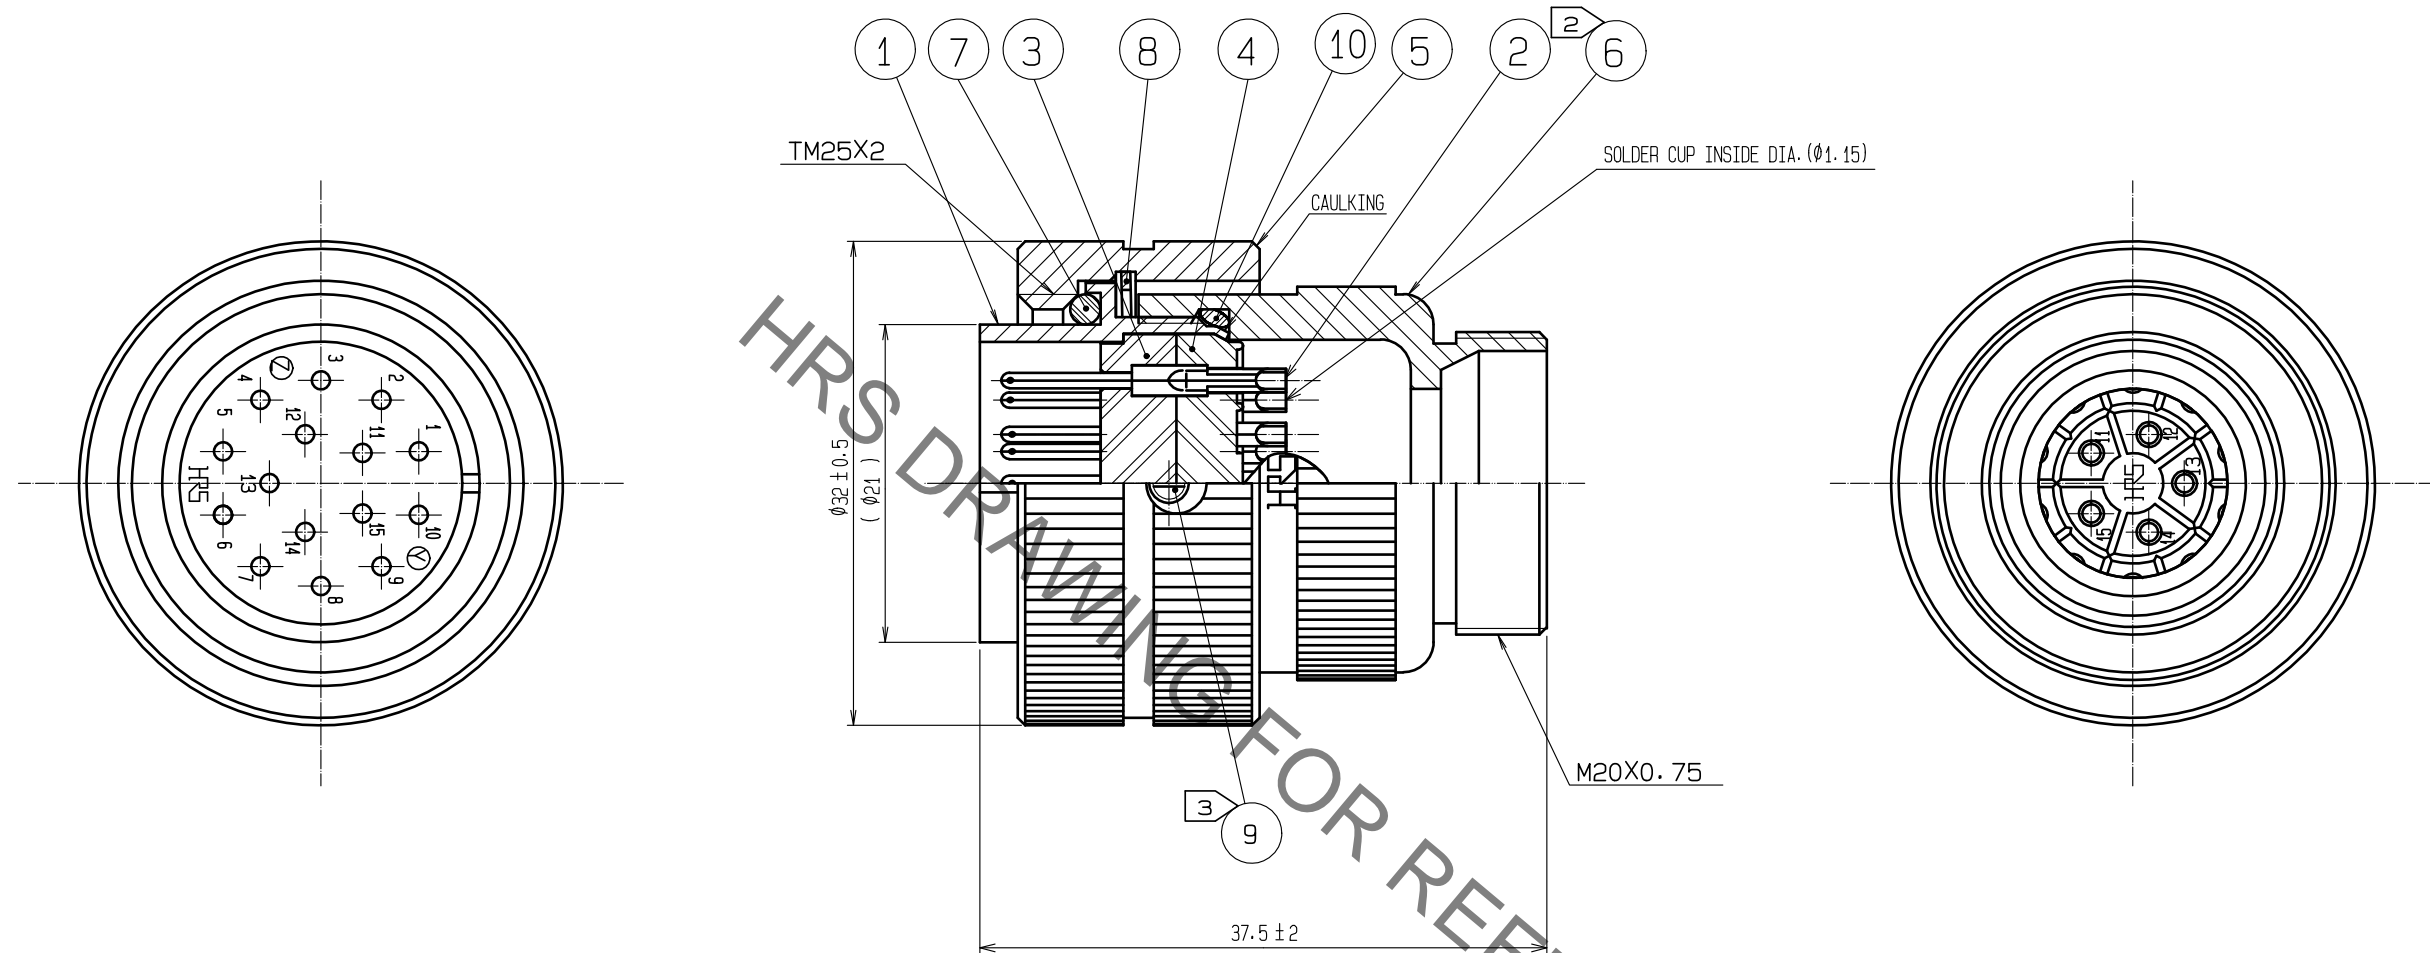

- NOTES 1 ONE EXAMPLE OF THE ROTATION OF REF.NO. ⑩ TO REF.NO. ① IS SHOWN.
- 2 THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑩: 2 TO 3N·m.
- 3 THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑩: 0.2 TO 0.3N·m.
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO. ①, ⑩ FROM LOOSENING.
- 4 THIS PRODUCTS TO BE USED WITH CABLE CLAMP, RM21WTP-CP※(71).
※ DESIGNATE DIAMETER(mm) OF APPLICABLE CABLE.
- 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

5	BRASS	NICKEL PLATING	10	CHLOROPRENE RUBBER	(BLACK)
4	DIALLYL PHTHALATE	(BLACK) UL94V-0	9	BRASS	NICKEL PLATING
3	DIALLYL PHTHALATE	(BLACK) UL94V-0	8	PHOSPHOR BRONZE	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 2μm min.	7	CHLOROPRENE RUBBER	(BLACK)
1	BRASS	NICKEL PLATING	6	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		APPROVED : HY. KOBAYASHI 18.02.22		DRAWING NO. EDC-110104-31-00			
HIROSE ELECTRIC CO., LTD.		CHECKED : HY. KOBAYASHI 18.02.22		PART NO. RM21WTP-15P(31)			
		DESIGNED : HY. KISHI 18.02.21		CODE NO. CL109-1403-8-31			
		DRAWN : MK. INOUE 18.02.13					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RM21WTP-15P\(31\)](#)