


1	2	3	4
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD
1	DIS-C-000514	T.K.E.K	07.02.17

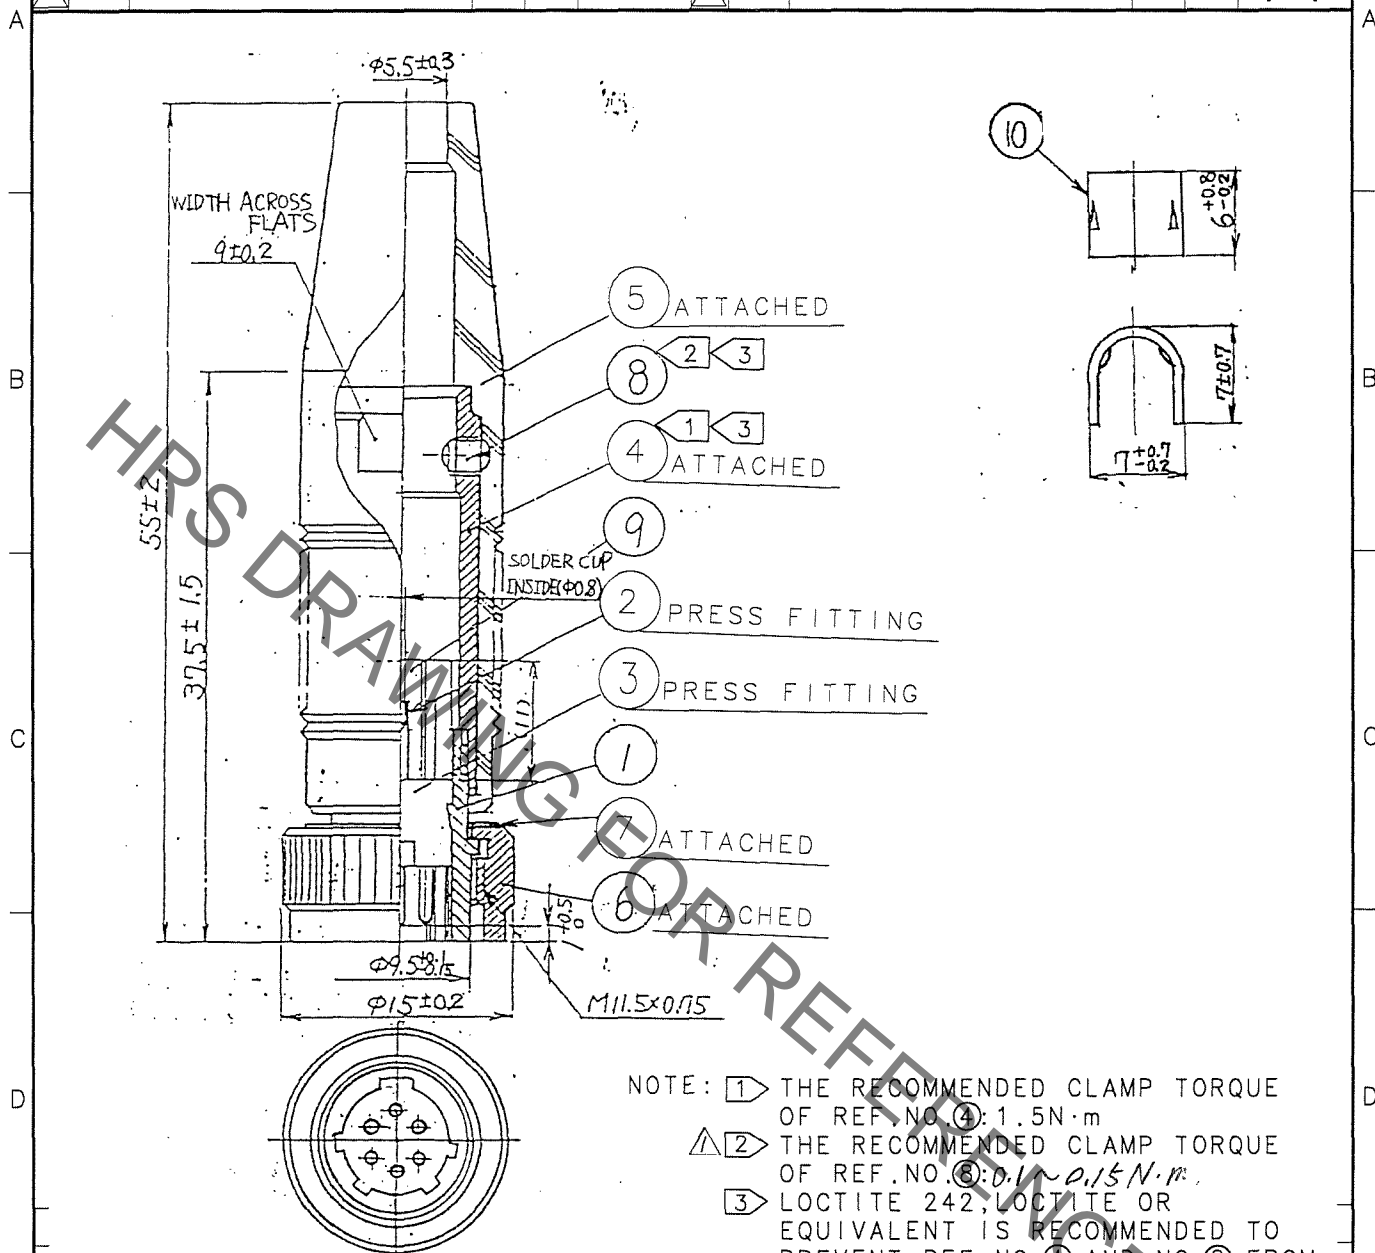

NOTE: ① THE RECOMMENDED CLAMP TORQUE OF REF.NO.④: 1.5N·m  
 ② THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑥: 0.1~0.15N·m.  
 ③ LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.④ AND NO.⑥ FROM LOOSENING.  
 ④ ROTATION EXAMPLES OF REF.NO.① AND NO.④ ARE SHOWN.

5	CR	(BLACK)	10	BRASS	
4	BRASS	NICKEL PLATING	9	FLURO	
3	POLYACETAL	(WHITE)	8	STEEL	CHROMATE TREATMENT (TRIVALENT CHROMIUM) JIS B 1117 M2.5×0.45×3
2	BRASS	SILVER PLATING 3μm min.	7	BRASS	NICKEL PLATED
1	ZINC ALLOY	NICKEL PLATING	6	BRASS	NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)  
CL

DRAWN  
M. Ishihara

DESIGNED  
E. Yumino

CHECKED  
H. Zemba

APPROVED  
M. Sato

RELEASED

05.09.26

05.09.26

05.09.27

05.09.28

TO	R				
F	DRAWING NO.	EDC4-009635-71	PART NO.	SR30-10PF-6P(71)	
	SCALE	2 : 1	CODE NO.	CL103-0319-0-71	1/1
	UNITS	mm			

HRS

HIROSE ELECTRIC CO., LTD.

CL103-0319-0-71

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[SR30-10PF-6P\(71\)](#)