


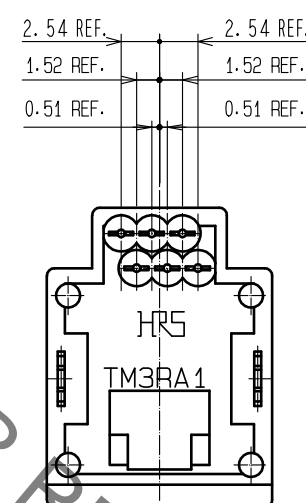
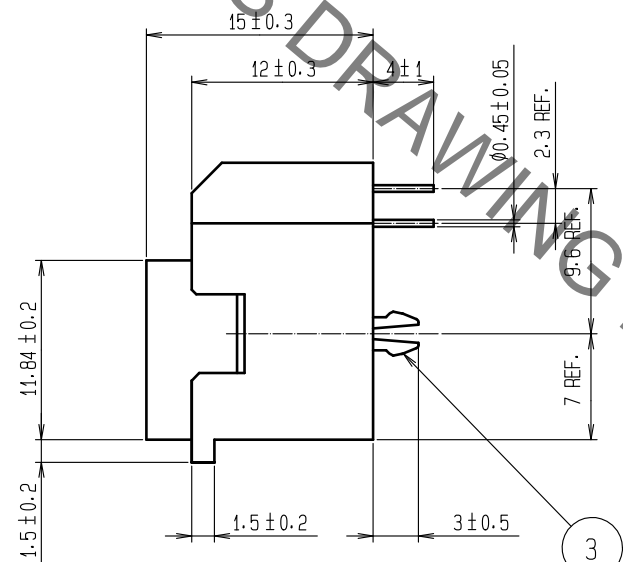



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

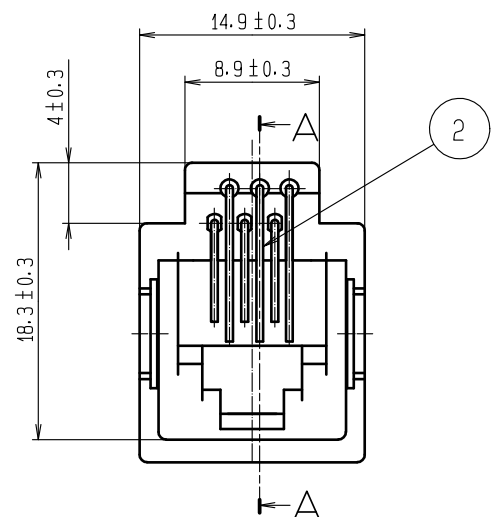

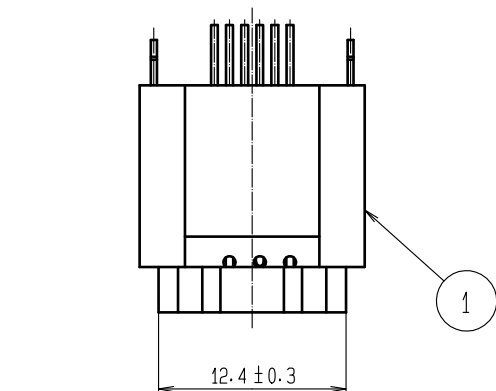



1 RECOMMENDED PC BOARD
PATTERN (4 : 1)
t = 1.6

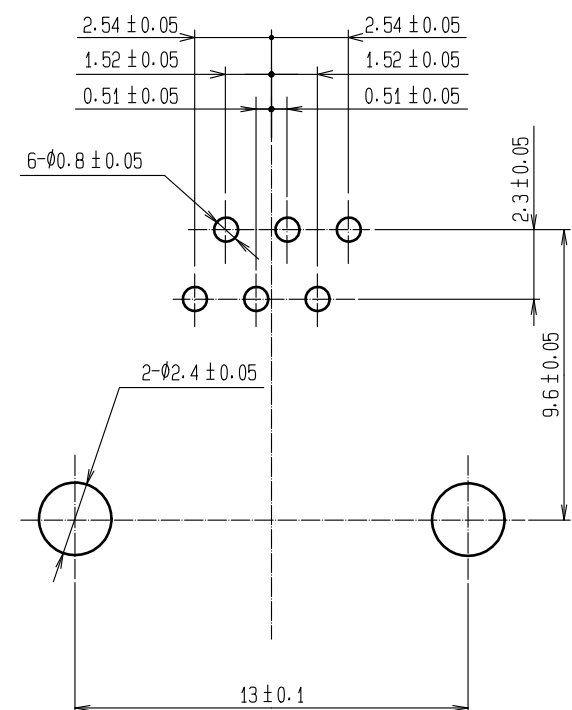


A-A



NOTE 1 PC BOARD DIMENSIONS ARE VIEWED FROM
THE CONNECTOR MOUNTING SURFACE ON PCB.

2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 1.27#m min		5	STYRENIC-BASED ELASTOMERS	BLUE								
		LEAR: GOLD PLATING 0.03#m min												
		UNDER:NICKEL PLATING 1.27#m min												
1	PBT	BLACK, UL94V-0		4	RIGID POLYVINYLCHLORIDE	CLEAR								
NO.	MATERIAL	FINISH , REMARKS		3	PHOSPHOR BRONZE	TIN REFLOW PLATING 1#m min								
				NO.	MATERIAL	FINISH , REMARKS								
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED :NM. NISHIMATSU		16.03.31		DRAWING NO.		EDC-025818-67-00						
		CHECED :NM. NISHIMATSU		16.03.31		PART NO.		TM3RA1-66 (67)						
		DESIGNED :TS. ITO		16.03.31		CODE NO.		CL222-1377-8-67						
		DRAWN :TS. ITO		16.03.31				 1/						

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

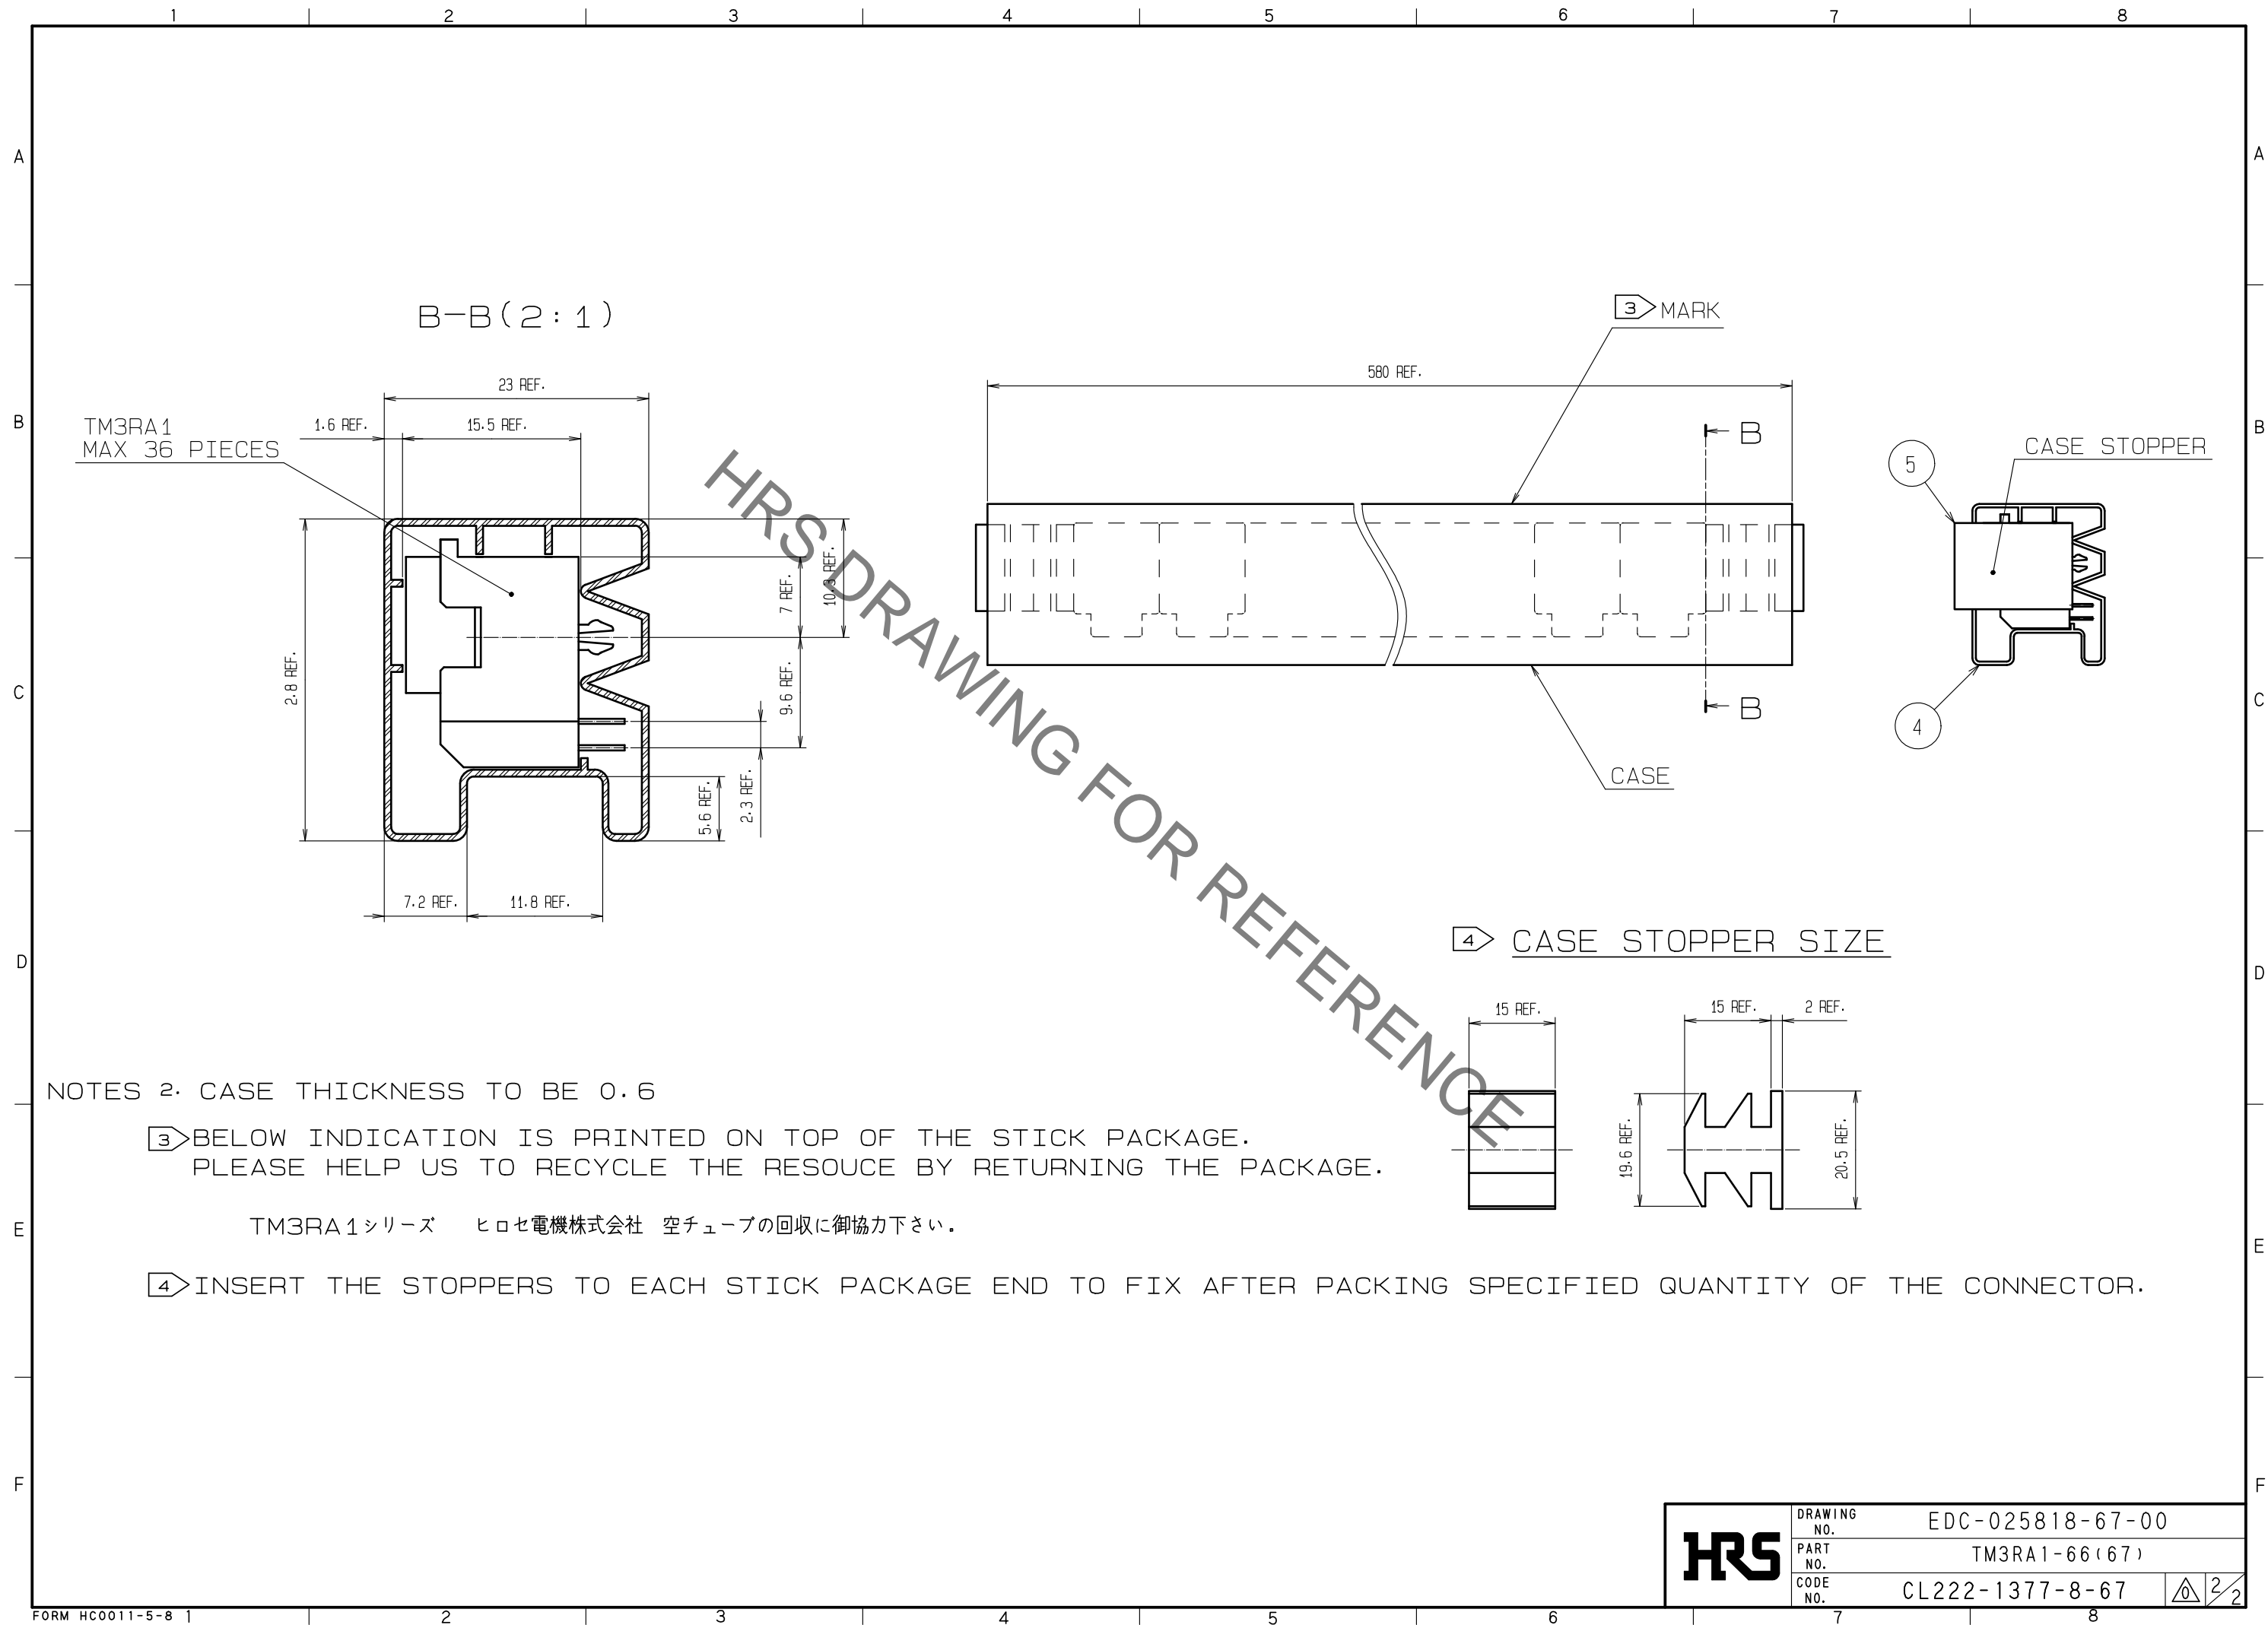

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[TM3RA1-66\(67\)](#)