



RECOMMENDED PC BOARD
PATTERN DRAWING (5:1)

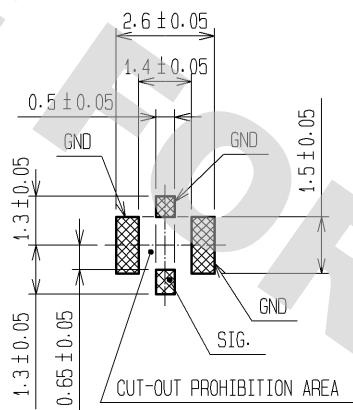


MASK THICKNESS : 0.1 or 0.12

ENBOSSED TAPING DRAWING (4:1)

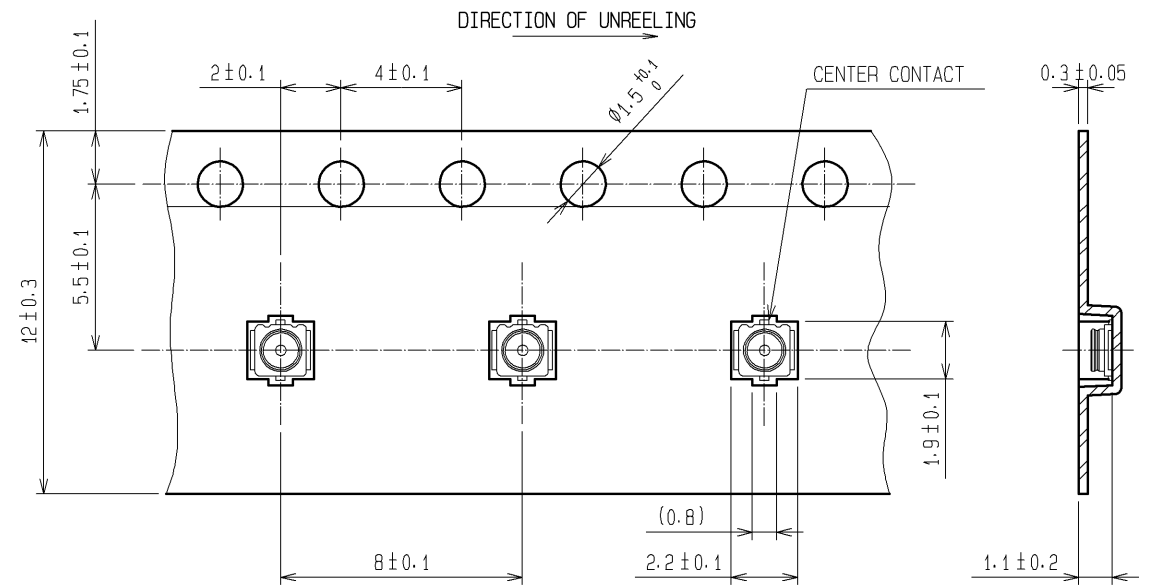



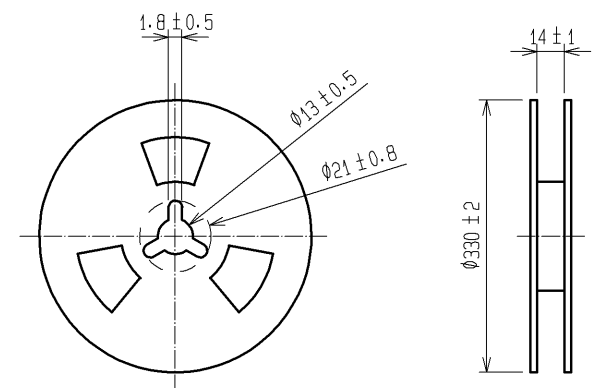


REEL DRAWING (SCALE FREE)



NOTES:

- 1 : THE QUANTITY OF W.FL2-R-SMT-1(10) IS 2000 CONNECTORS PER REEL.
- 2 : THIS DIMENSION SHOWS THE ALLOWABLE RANGE THAT THE RESIN IS PUT OVER THE CENTER CONTACT.
- 3 : LEAD CO-PLANARITY SHALL BE 0.1MAX.
- 4 : FOR THE POSSIBILITY OF BREAKAGE OR DEFORMATION, DO NOT MATE THIS CONNECTOR WITH PARTNER, W.FL2-LP-040 BEFORE MOUNTING ON PC BOARD.
- 5 : THERE IS NO COMPATIBILITY BETWEEN W.FL SERIES AND W.FL2 SERIES.
- 6 : USE ALL PRODUCTS WITHIN 6 MONTHS AFTER THE DELIVERY. STORE THEM IN MANUFACTURER'S PACKAGE OR TIGHTLY RE-CLOSED BOX WITH THE FOLLOWING CONDITIONS. CHECK THE TERMINAL SOLDERABILITY BEFORE USE IF THE PRODUCT HAS BEEN STORED FOR MORE THAN 6 MONTHS.
- TEPERATURE: -10℃ TO +40℃
HUMIDITY : 15 TO 85% RH.
- 7 : ENVIRONMENTAL CONDITIONS
DO NOT USE THE PRODUCTS UNDER THE ENVIRONMENTAL CONDITIONS AS SHOWN BELOW DUE TO POSSIBLE PRODUCT DETERIORATION.
- SPECIAL GAS ATMOSPHERE (HYDROGEN SULFIDE GAS, SULFUR SULFIDE GAS AND HYDROGEN CHLORIDE GAS)
PLACE ATTENTION REQUIRED: HEATING SYSTEM, AREA NEAR HOT SPRING, VOLCANIC MOUNTAIN AND ALIKE.
- WATER SPLACHED AND CONDENSATION PLACES.
PLACE ATTENTION REQUIRED: HARSH TEMPERATURE CHANGE.

2	BRASS	GOLD PLATING						
1	PHOSPHOR BRONZE	SILVER PLATING		3	LCP	(BLACK). UL94V-0		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 10:1	COUNT  2	DESCRIPTION OF REVISIONS DIS-D-001378		DESIGNED YI. FUNADA	CHECKED NK. NINOMIYA	DATE 09. 03. 12
 HIROSE ELECTRIC CO., LTD.		APPROVED : IJ. MITANI		05. 10. 06	DRAWING NO.	EDC3-305250-10		
		CHECKED : MH. YAMANE		05. 10. 04	PART NO.	W. FL2-R-SMT-1(10)		
		DESIGNED : KT. MAKI		05. 10. 04	CODE NO.	CL331-0315-4-10		
		DRAWN : KT. MAKI		05. 10. 04				
								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[W.FL2-R-SMT-1\(10\)](#)