
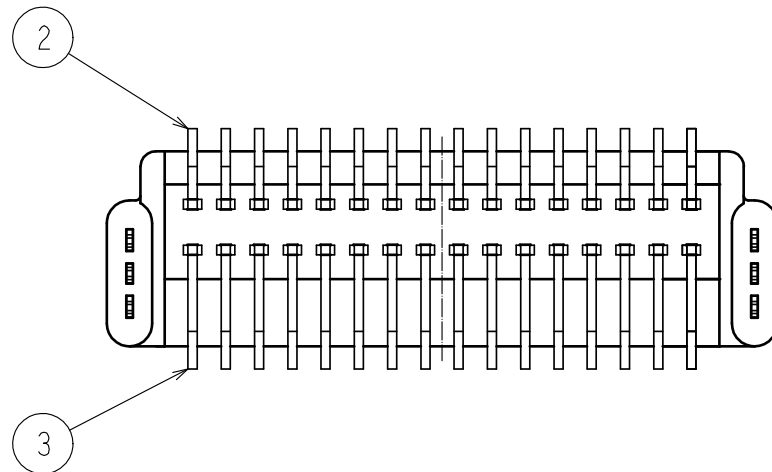
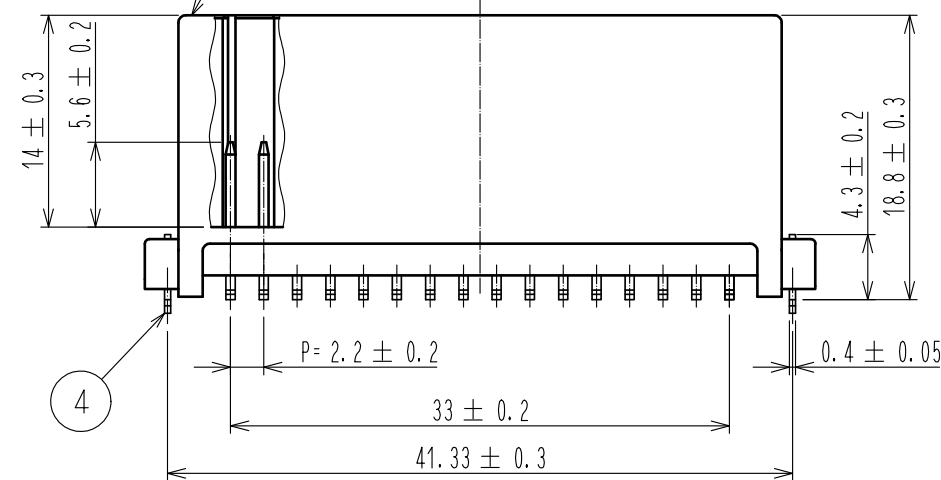






Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

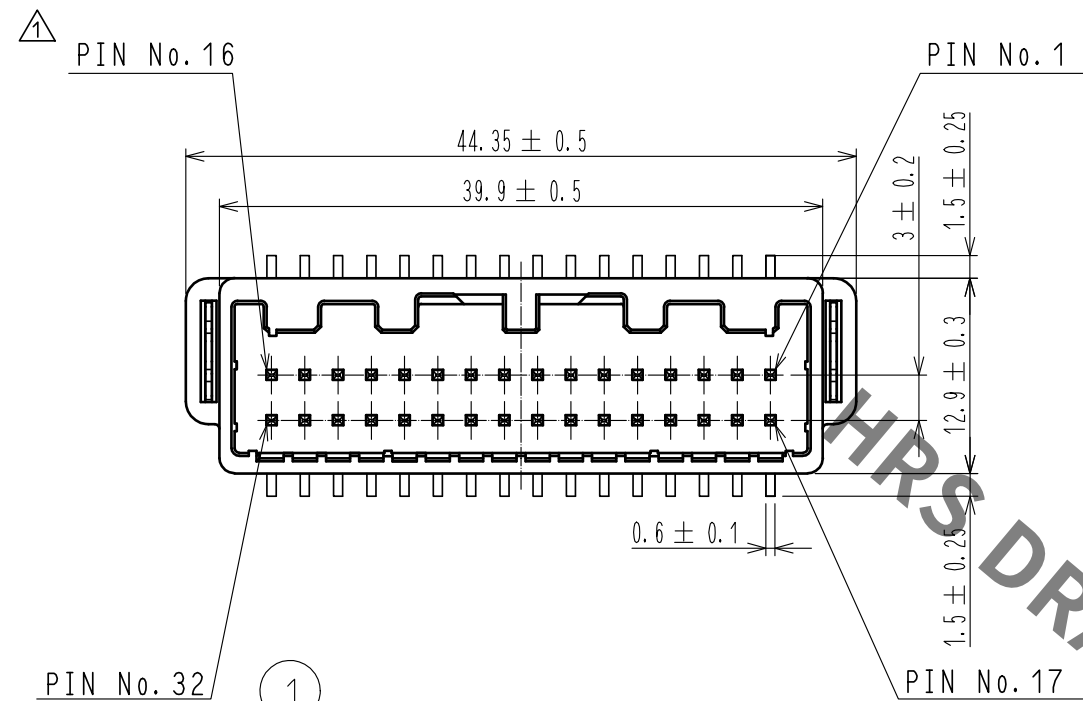


TRAY PACKING SPECIFICATIONS

6 TRAYS STACKING.
ODD NUMBER TRAYS AND EVEN NUMBER TRAYS ARE REVERSE DIRECTION.
TOP TRAY IS EMPTY.

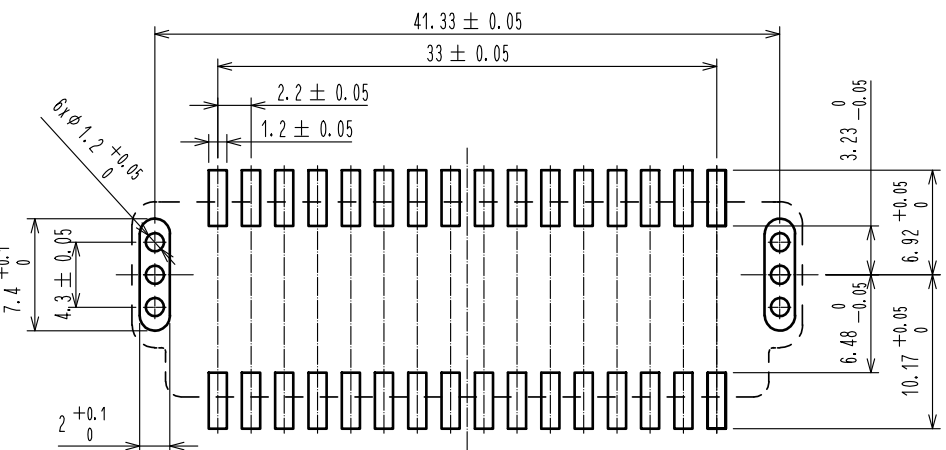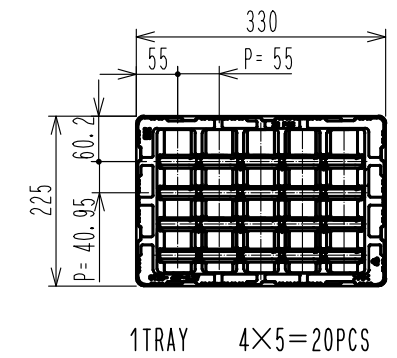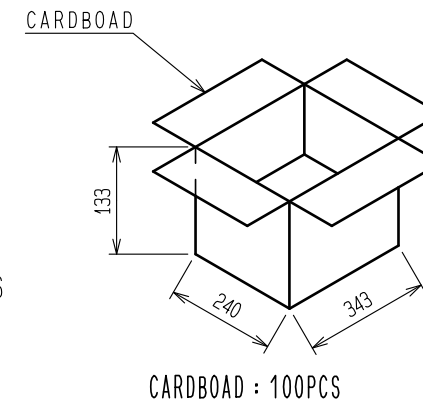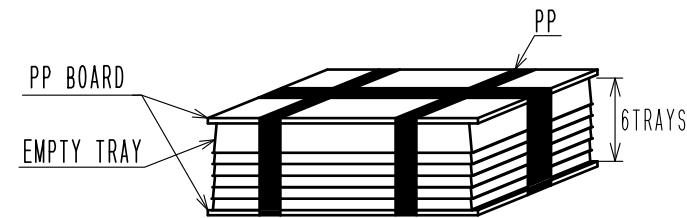

RECOMMENDED PCB LAYOUT

- NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW
(REFER TO RIGHT FIG.)
USED REFLOW SYSTEM
: 1P IN THE AIR OR NITROGEN
NO. OF CYCLES : 2 MAX
PEAK : 250℃
OVER 230℃ : 20~40s
PREHEAT : 150~180℃
60~120s
2. TEMPERATURE FOR SOLDERING IRON
: 280~300℃ WITHIN 2s
3. CO-PLANARITY SHALL BE 0.12 MAX.
4. PC BOARD THICKNESS=1.6
5. RECOMMENDED SOLDER THICKNESS=0.15

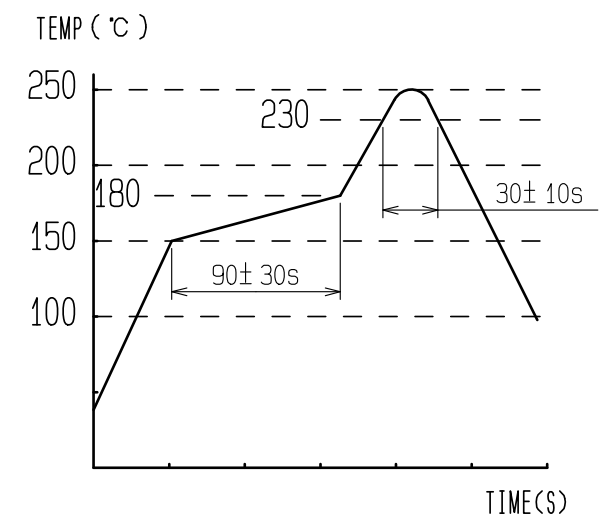

2	BRASS	TIN PLATED	T=0.64	4	BRASS	TIN PLATED	T=0.4
1	PPS	LIGHT GRAY		3	BRASS	TIN PLATED	T=0.64
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
UNITS	mm	SCALE	2 : 1	COUNT	1	DESCRIPTION OF REVISIONS	DIS-T-00000407
APPROVED	AR. SHIRAI	12.10.12	DESIGNED	YT. HAYAKAWA	CHECKED	HS. OZAWA	DATE
CHECKED	NH. NAKATA	12.10.11	DATE	15.07.14	DRAWING NO.	EDC3-166658-02	
DESIGNED	TK. SHISHIKURA	12.10.11	PART NO.	GT25-32DP-2.2V(C01)	CODE NO.	CL775-0022-3-01	
DRAWN	TK. SHISHIKURA	12.10.11					

HRS HIROSE ELECTRIC CO., LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT25-32DP-2.2V\(01\)](#)