

SMA Reverse Coaxial Connector Up to 26.5GHz

SMA(R) Series



■ Features

1. Excellent high-frequency performance

Equivalent to perform same characteristics as Hirose HRM series which is Japan's first SMA. Comforming to FCC Standard (Part15 47 CFR 15.203*)

2. Small size / Light weight / Robust

3. Wide variation

Various SMA and FL conversion Adapters are available. Assembly with FL series is available.

■ Applications

Wi-Fi equipment, Gaming machine, Measurement instrument and other equipment's inter connection which need special interface.

■ Product Specifications

Ratings	Nominal characteristic impedance		50Ω	Operating Temperature Range		-55℃ to +125℃
	Rated frequency		0 to 26.5GHz	Storage Temperature Range		95% RH or less
Items	Specifications			Conditions		
1. Contact resistance	SMA (R) -300-126B		HRMJ-SMA (R) P		Measured at less than 100mA DC	
	Center : Less than 6mΩ		Center : Less than 8mΩ			
	External : Less than 6mΩ		External : Less than 8mΩ			
2. Withstanding voltage	No flashover or breakdown			1000V AC for 1 minute		
3. Insulation resistance	5000MΩ min.			Measured at 500V DC		
4. Moisture resistance of temperature/humidity cycle	SMA (R) -300-126B		HRMJ-SMA (R) P		Left for 10 cycles (240 hours) in an environment with the temperature ranging from +25 to +65℃ and the humidity ranging from 90 to 98%.	
	Insulation resistance : More than 100MΩ (in a high humidity environment) Insulation resistance : More than 5000MΩ (in a dry environment)		Insulation resistance : More than 100MΩ (in a high humidity environment) Insulation resistance : More than 1000MΩ (in a dry environment)			
5. Temperature cycle	No broken, cracked or loose parts			Temperature : 5 cycles for a series of time periods : -65℃ for 30 minutes → +125℃ for 30 minutes		
6. Salt spray	SMA (R) -300-126B		HRMJ-SMA (R) P		Continuous 48 hour in 5% salt water solution	
	VSWR : Less than 1.3		VSWR : Less than 1.4		0 to 3GHz	0 to 26.5GHz
	VSWR : Less than 1.5				3GHz to 6GHz	
7. Mating Cycles	SMA (R) -300-126B		HRMJ-SMA (R) P		SMA (R) -300-126B	HRMJ-SMA (R) P
	Center : Less than 8mΩ External : Less than 8mΩ		Center : Less than 12mΩ External : Less than 12mΩ		500 cycles	1000 cycles
8. V.S.W.R.	SMA (R) -300-126B		HRMJ-SMA (R) P		SMA (R) -300-126B	HRMJ-SMA (R) P
	VSWR : Less than 1.3		VSWR : Less than 1.25		0 to 3GHz	0 to 12.4GHz
	VSWR : Less than 1.5		VSWR : Less than 1.3		3GHz to 6GHz	12.4GHz to 18GHz
			VSWR : Less than 1.4		—	18GHz to 26.5GHz

■ Materials / Finish

Part		Materials	Finish
Shell	Receptacle	Brass	Gold plated
	Plug, Shell	Stainless steel	Gold plated, Passivated
Contact	Male contact	Brass	Gold plated
	Female contact	Beryllium copper	Gold plated
Insulator		PTFE (resin)	—


■Product Number Structure

Refer to the chart below when determining the product specifications from the product number.
Please select from the product numbers listed in this catalog when placing orders.

SMA(R) - [] - [] - [] - []
1 2 3 4 5



① Series name Plug / Receptacle : SMA(R) Adapters, harnesses which connect to HRM : HRM Other adapters and harnesses : SMA(R), SMAR		③ Serial number / Cable type Plug / Receptacle : One to three digits Harness : 066 / 068	
② Connector type Plug / Receptacle 200 : Flexible cable 300 : Receptacle Adapters, harnesses which connect to HRM : SMA(R), SMAR Other adapters and harnesses : U.FL / BPJ		④ Cable length identification code Harness : A	
		⑤ Cable length Harness : One to three digits	

■Functional diagram

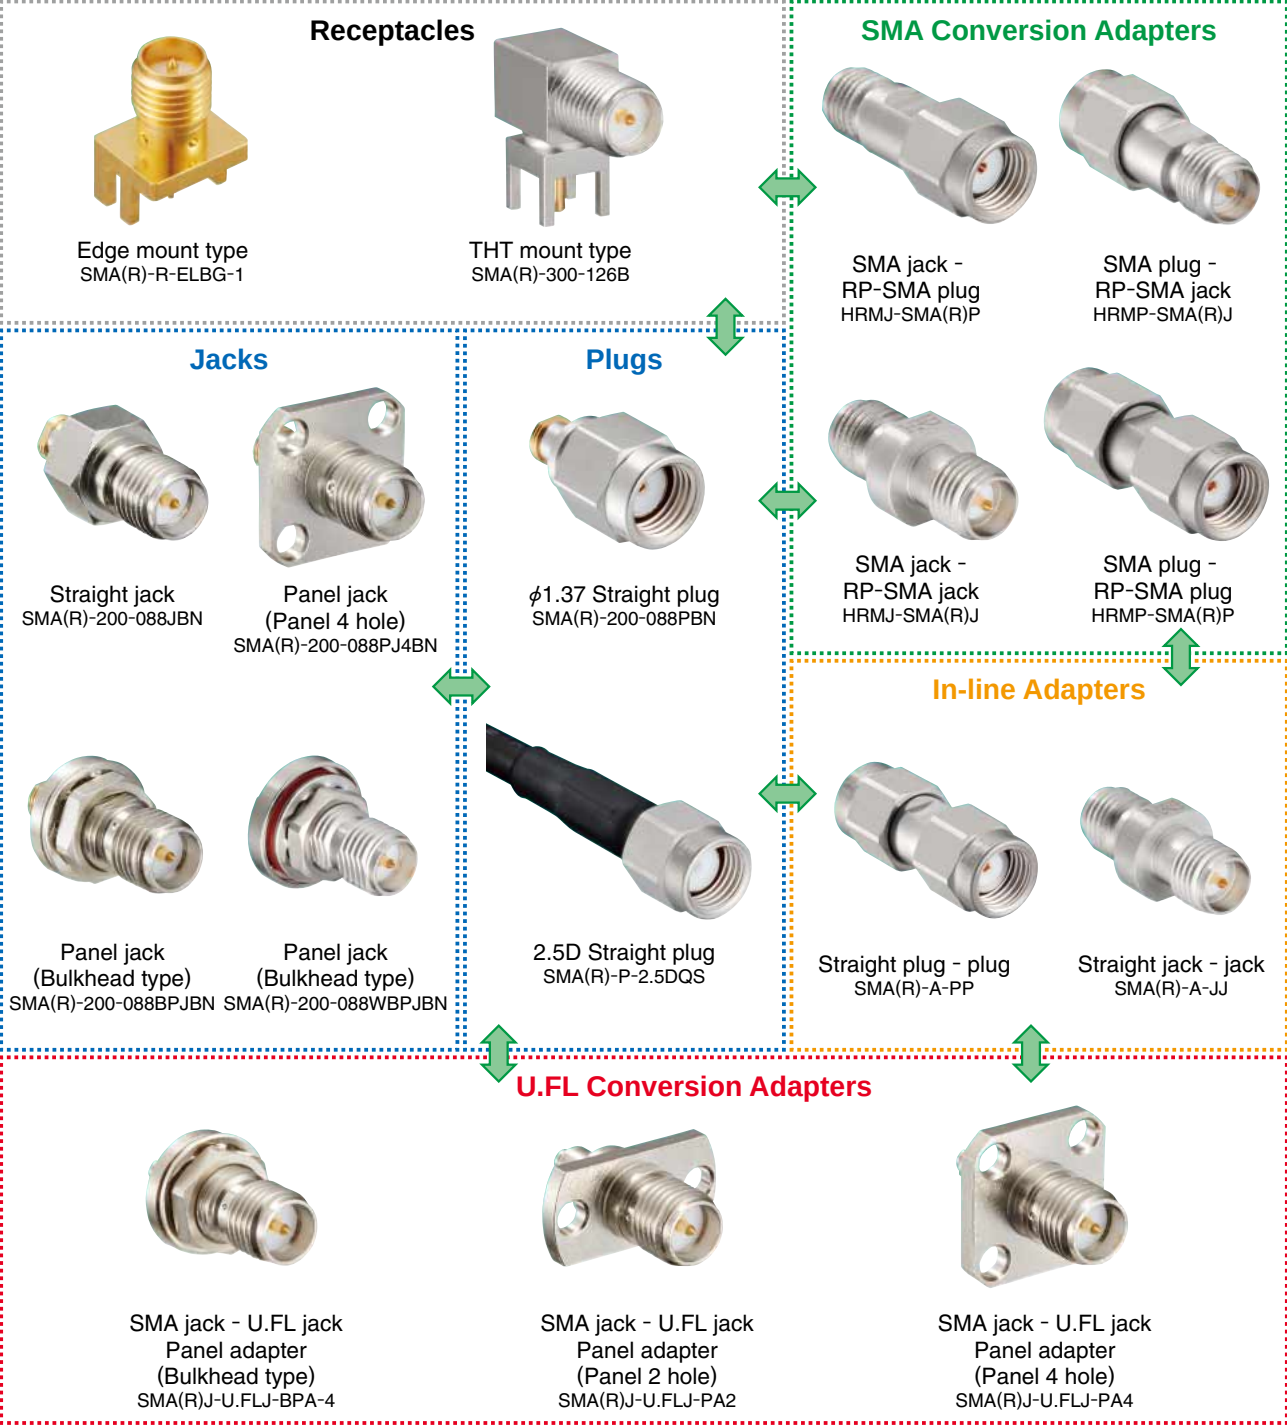

■High-frequency characteristic


Connector combination for the measurement.
(Straight adapter SMA Plug - PR-SMA Plug and SMA Jack - RP-SMA Jack)

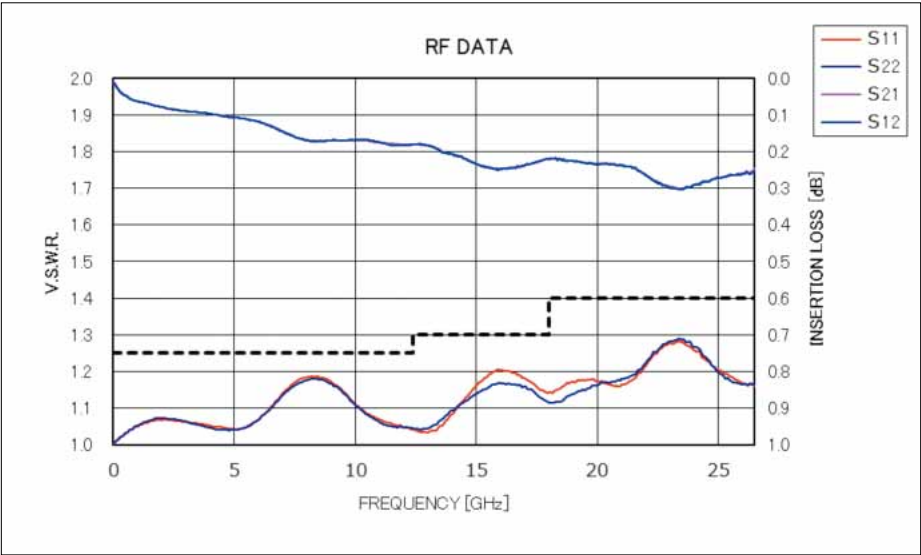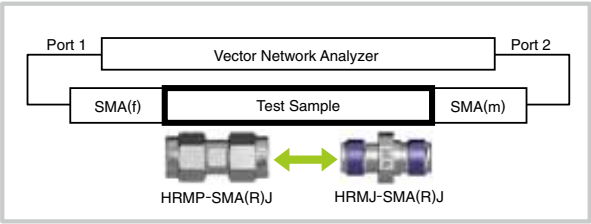

■Dimensions


Plug openings

Shape 1

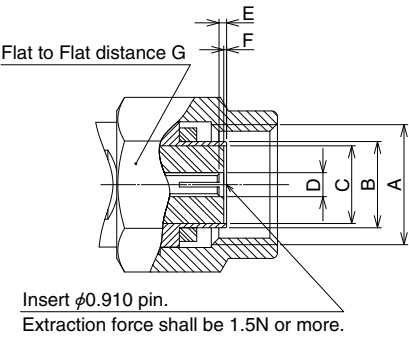


Symbol	Dimensions	
	Shape1	Shape2
A	1/4-36UNS-2B	
B	φ4.56	
C	φ4.11	
D	φ1.27	
E	0.13	0.58
F	0.08	
G	8	

Jack openings

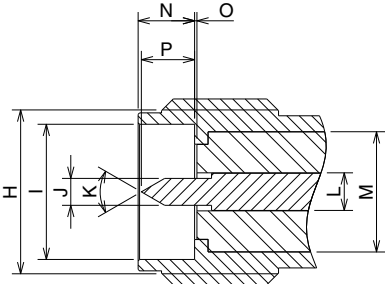


Symbol	Dimensions
H	1/4-36UNS-2A
I	φ4.62
J	φ0.92
K	60°
L	φ1.27
M	φ4.11
N	1.93
O	0.08
P	1.8

Shape 2

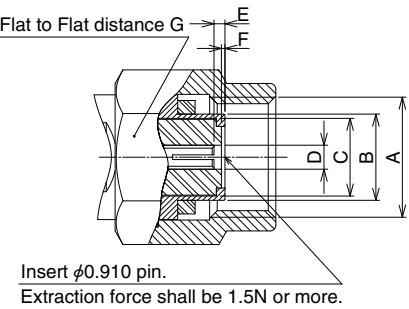


■Ultra - fine Coaxial Cable (6GHz)

●Straight plug



Part No.	HRS No.	Applicable Cable
SMA(R)-200-040PBN	323-0925-0	φ0.81
SMA(R)-200-066PBN	323-0930-0	φ1.13, φ1.32
SMA(R)-200-088PBN	323-0905-3	φ1.37, φ1.48

●Straight jack

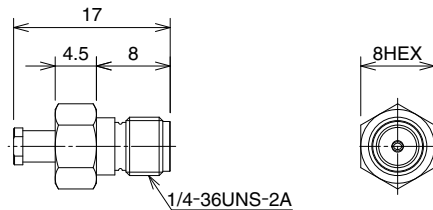


Part No.	HRS No.	Applicable Cable
SMA(R)-200-040JBN	323-0926-3	φ0.81
SMA(R)-200-066JBN	323-0931-3	φ1.13, φ1.32
SMA(R)-200-088JBN	323-0904-0	φ1.37, φ1.48

●Panel jack (4 hole type)



Part No.	HRS No.	Applicable Cable
SMA(R)-200-040PJ4BN	323-0928-9	φ0.81
SMA(R)-200-066PJ4BN	323-0932-6	φ1.13, φ1.32
SMA(R)-200-088PJ4BN	323-0934-1	φ1.37, φ1.48


●Panel jack (2 hole type)

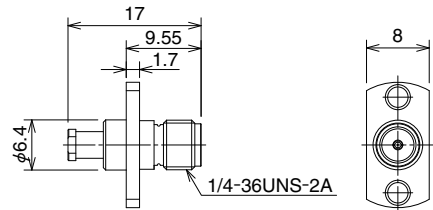

Part No.	HRS No.	Applicable Cable
SMA(R)-200-040PJ2BN	323-0929-1	φ0.81
SMA(R)-200-066PJ2BN	323-0933-9	φ1.13, φ1.32
SMA(R)-200-088PJ2BN	323-0935-4	φ1.37, φ1.48


■ Ultra - fine Coaxial Cable (6GHz)

● Panel jack (Bulkhead type)

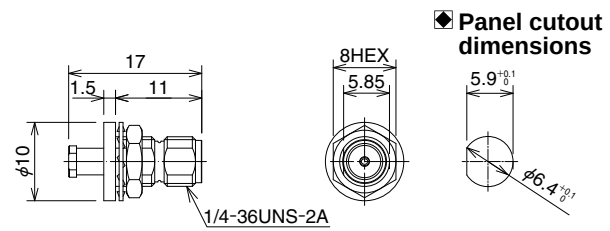

Part No.	HRS No.	Applicable Cable
SMA(R)-200-040BPJBN	323-0927-6	$\phi 0.81$
SMA(R)-200-066BPJBN	323-0902-5	$\phi 1.13$, $\phi 1.32$
SMA(R)-200-088BPJBN	323-0901-2	$\phi 1.37$, $\phi 1.48$


● Panel jack (Bulkhead type / Waterproof)

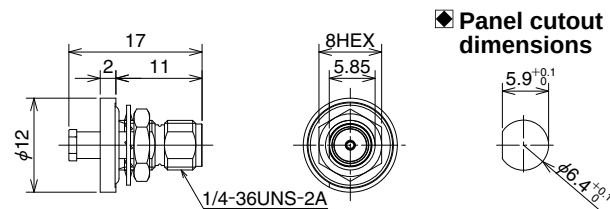

Part No.	HRS No.	Applicable Cable
SMA(R)-200-040WBPJBN	323-0947-3	$\phi 0.81$
SMA(R)-200-066WBPJBN	323-0948-6	$\phi 1.13$, $\phi 1.32$
SMA(R)-200-088WBPJBN	323-0949-9	$\phi 1.37$, $\phi 1.48$

■ Straight plug



● Flexible cable

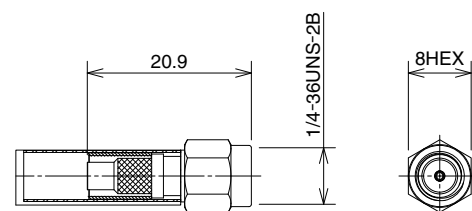

Part No.	HRS No.	Applicable Cable
SMA(R)-P-2.5DQS	323-0875-4	2.5D-HQ SUPER



■Receptacles

●Right angle receptacle (THT mount type)

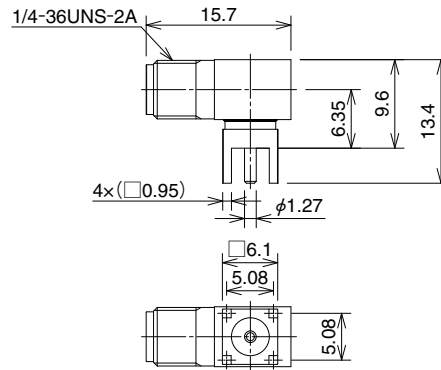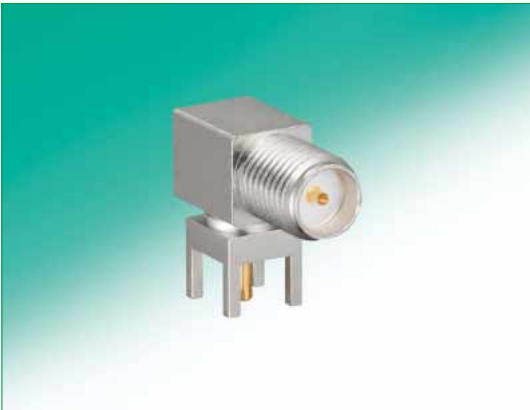

Part No.	HRS No.	Remark
SMA(R)-300-126B	323-0111-0	Shell : Brass


●Straight receptacle (Edge mount type)

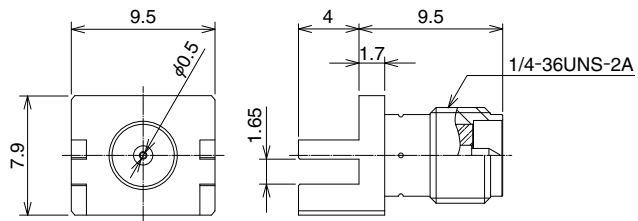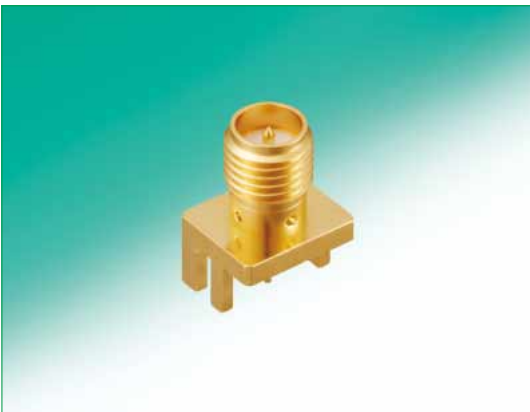

Part No.	HRS No.	Remark
SMA(R)-R-ELBG-1	323-0866-3	PCB Thickness 1.6mm


■In-line Adapters

●Jack - Jack

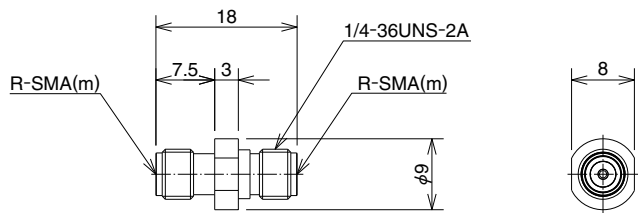

Part No.	HRS No.	Remark
SMA(R)-A-JJ	323-0124-0	Shell : Stainless steel


●Plug - Plug

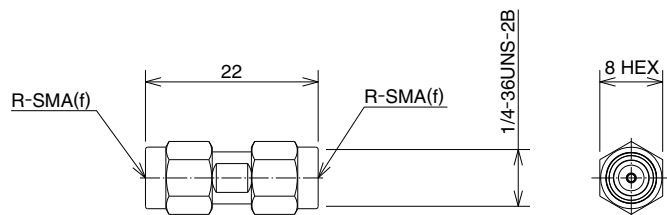

Part No.	HRS No.	Remark
SMA(R)-A-PP	323-0127-0	Shell : Stainless steel


■SMA Conversion Adapters

●SMA jack - RP-SMA plug

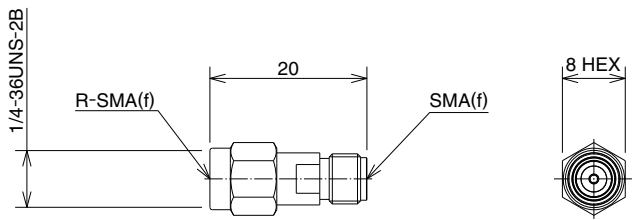


Part No.	HRS No.	Remark
HRMJ-SMA(R)P	323-0035-0	Shell : Stainless steel

●SMA plug - RP-SMA jack

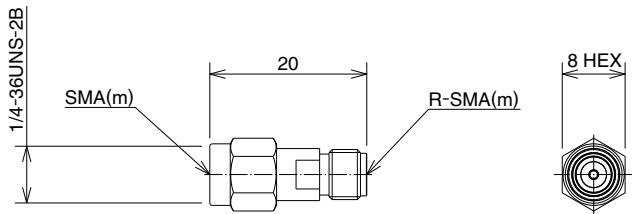


Part No.	HRS No.	Remark
HRMP-SMA(R)J	323-0036-0	Shell : Stainless steel

●SMA jack - RP-SMA jack

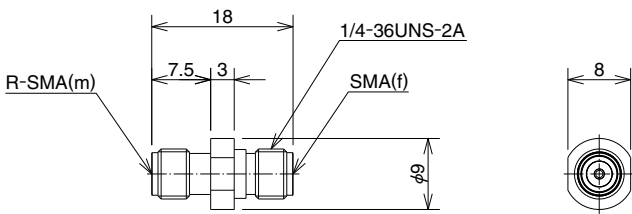

Part No.	HRS No.	Remark
HRMJ-SMA(R)J	323-0011-0	Shell : Stainless steel


●SMA plug - RP-SMA plug

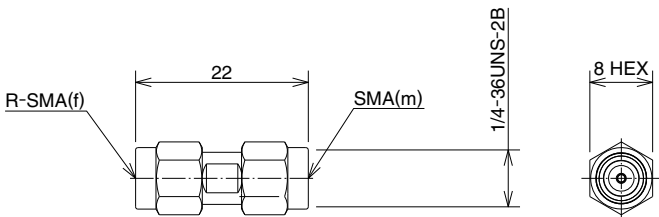

Part No.	HRS No.	Remark
HRMP-SMA(R)P	323-0009-0	Shell : Stainless steel


■U.FL-J Conversion Adapters

●Panel adapter (Panel 4 hole)

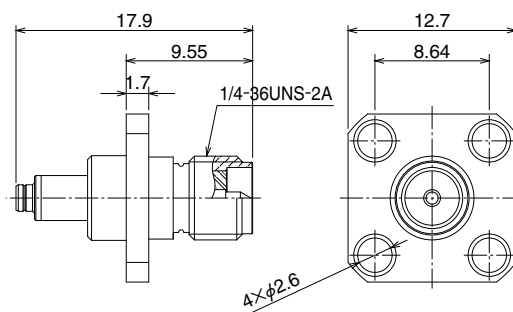


Part No.	HRS No.	Remark
SMA(R)J-U.FLJ-PA4	311-0466-5	Shell : Brass

●Panel adapter (Panel 2 hole)

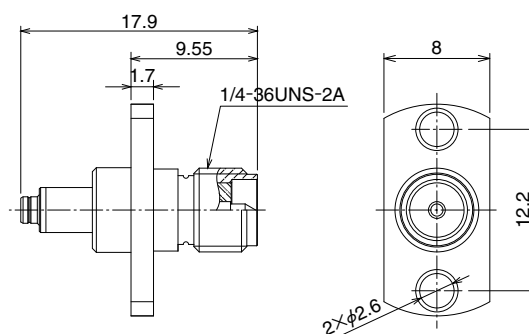

Part No.	HRS No.	Remark
SMA(R)J-U.FLJ-PA2	311-0468-0	Shell : Brass

●Panel adapter (Bulkhead type)

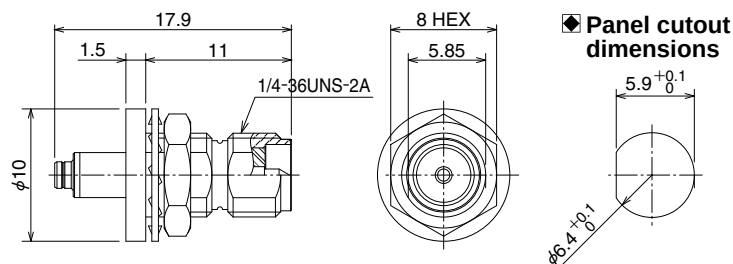

Part No.	HRS No.	Remark
SMA(R)J-U.FLJ-BPA-4	311-0464-0	Shell : Brass



HIROSE ELECTRIC CO.,LTD.

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN

TEL: +81-45-620-3526 Fax: +81-45-591-3726

<http://www.hirose.com>

<http://www.hirose-connectors.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[SMA\(R\)-200-040PBN](#)