

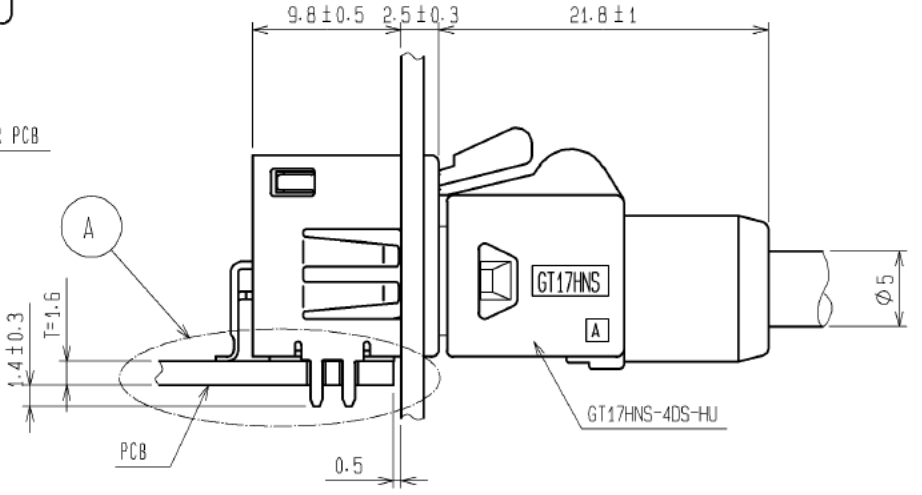
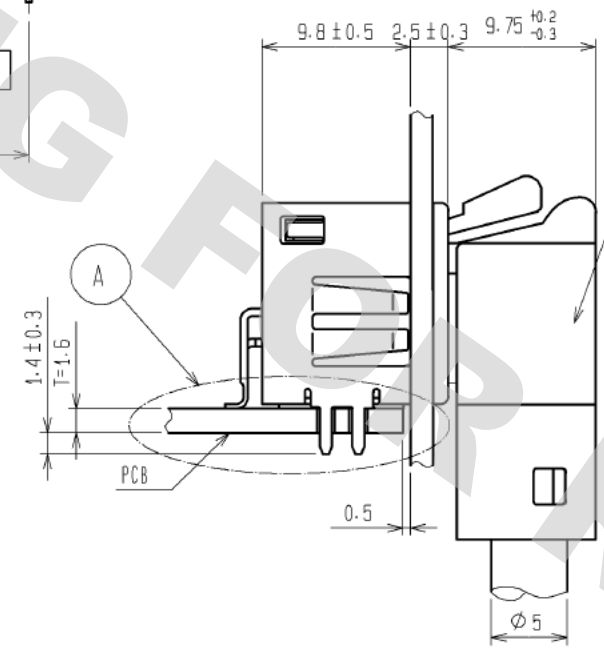


1

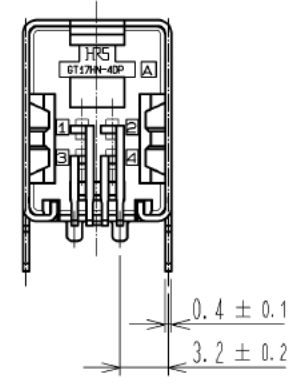

- 2) HAND SOLDERING: 280-300°C, 2S MAX.
- 3) CONTACT COPLANARITY: 0.1mm MAX.
- 4) RECOMMENDED THICKNESS OF PCB: 1.6mm
- 5) RECOMMENDED THICKNESS OF SOLDERING PASTE: 0.12mm
- 6) THIS PRODUCT CAN REPLACE CL767-0144-6-10 GT17HN-4DP-2H(A)(10).

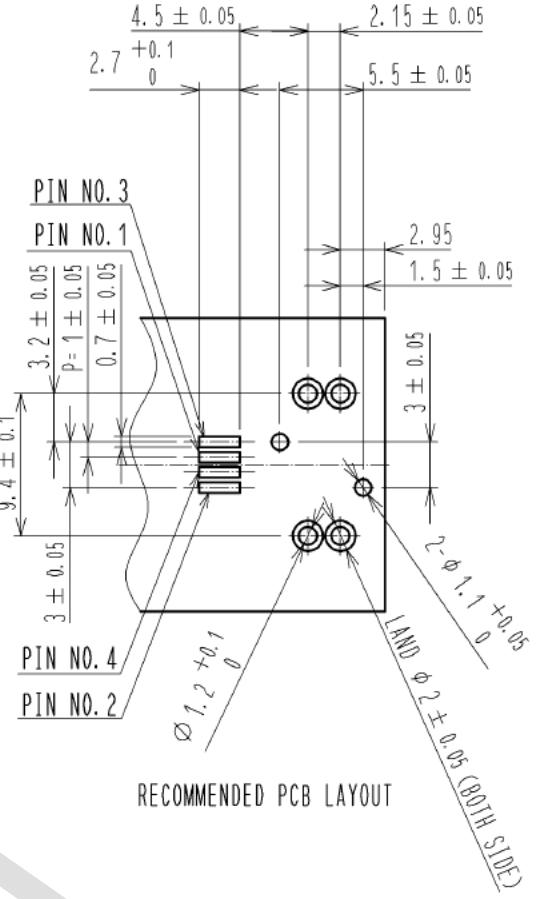


RECOMMENDED PANNEL LAYOUT

RECOMMENDED PCB LAYOUT

2	PA	BROWN		4	COPPER ALLOY	TIN PLATING		
1	COPPER ALLOY	TIN PLATING		3	COPPER ALLOY	TIN PLATING		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-T-002937	DESIGNED KK. FURUKAWA	CHECKED AR. SHIRAI	DATE 12. 10. 09
 HIROSE ELECTRIC CO., LTD.		APPROVED : AR. SHIRAI			12. 03. 16	DRAWING NO. EDC3-168892-01		
		CHECKED : NH. NAKATA			12. 03. 16	PART NO. GT17HN2-4DP-2H(A)(10)		
		DESIGNED : KK. FURUKAWA			12. 03. 15	CODE NO. CL767-0267-6-10		
		DRAWN : KK. FURUKAWA			12. 03. 15	 1/2		

DRAWING FOR REFERENCE: This is subject to change without notice
05/31/2013

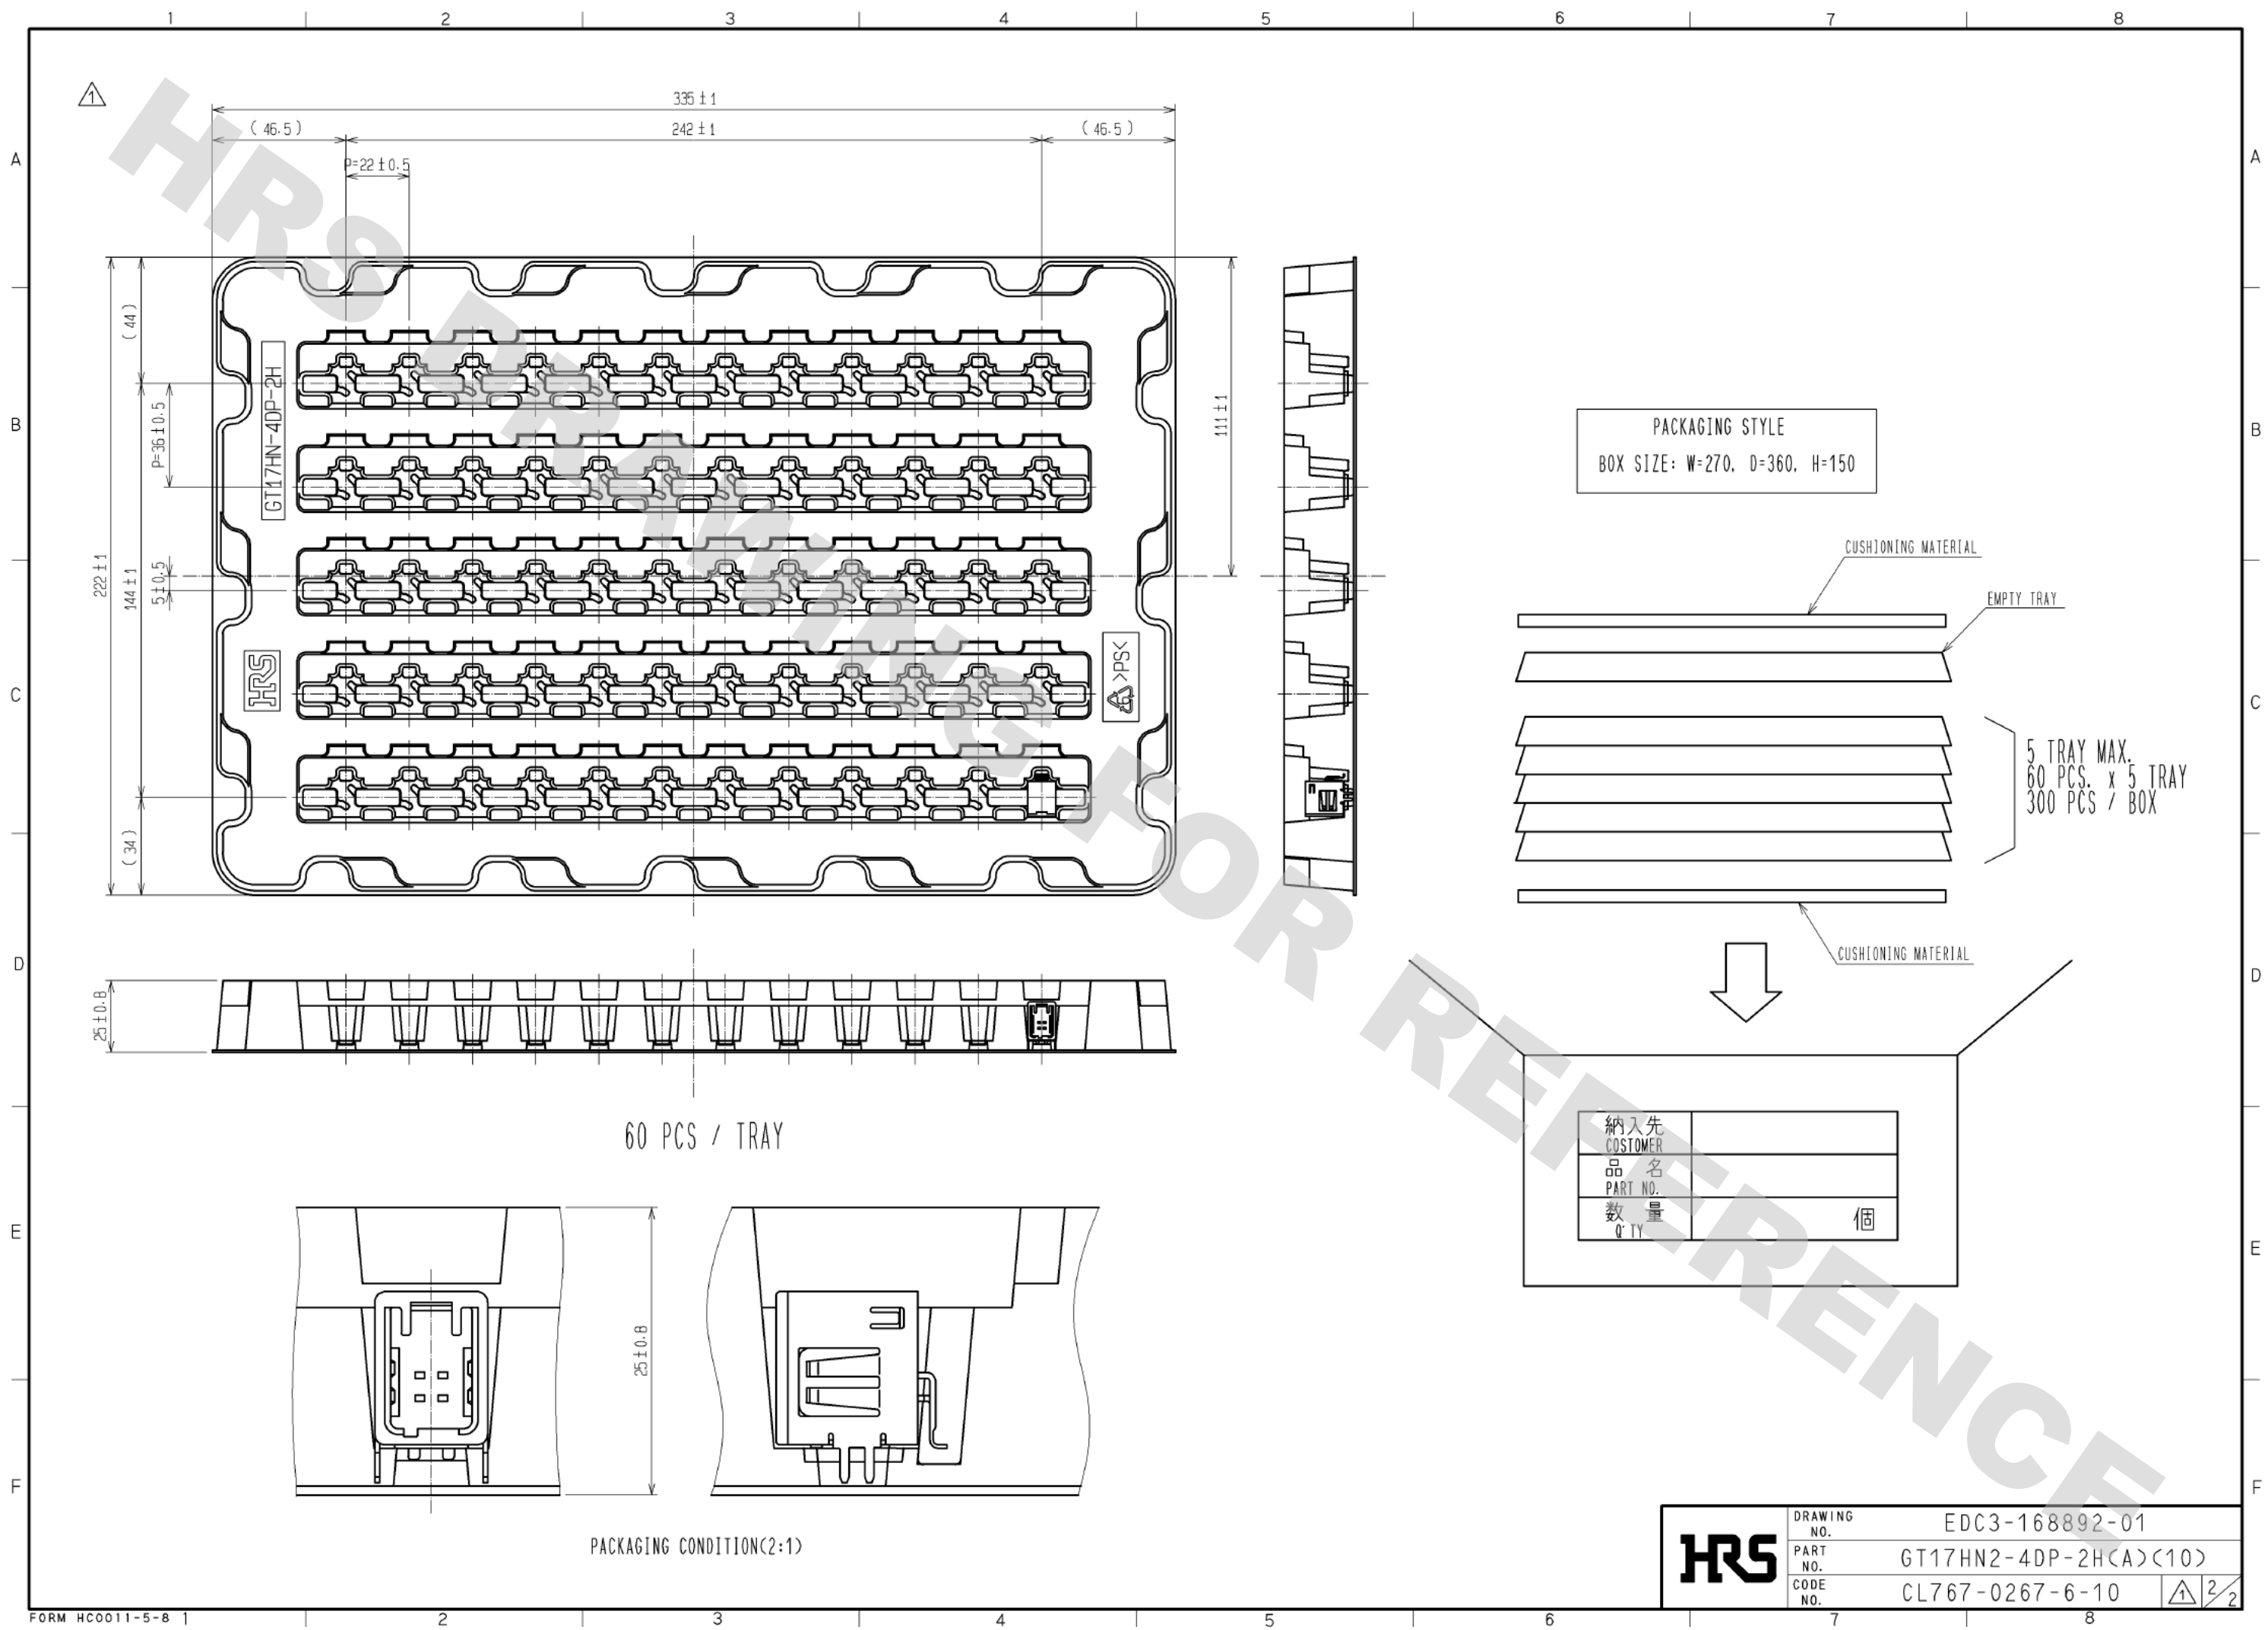

HRS	DRAWING NO.	EDC3-168892-01	
	PART NO.	GT17HN2-4DP-2H(A)<10>	
	CODE NO.	CL767-0267-6-10	2 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT17HN2-4DP-2H\(A\)\(10\)](#)