


TO

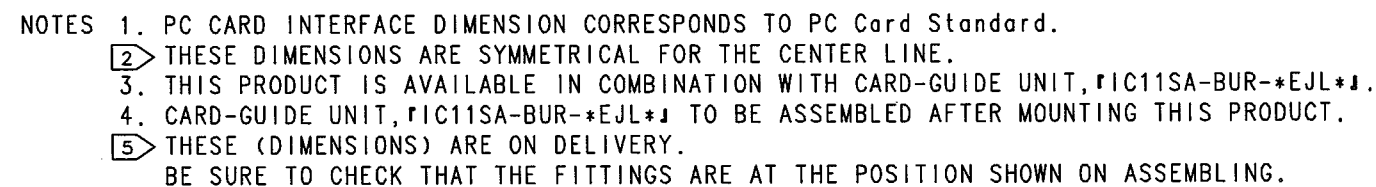

Technical drawing of a cable assembly, labeled 'A'. The drawing shows a cross-section of a cable with various dimensions and labels. The main dimensions are:

- Overall length: 46.2725 ± 0.05
- Distance from left end to first connector: 3.7275 ± 0.05
- Distance between connectors: 2 ± 0.05
- Distance from second connector to right end: 1.2 ± 0.1
- Distance from right end to last connector: 2 ± 0.1
- Distance from last connector to right end: 1.4 ± 0.1
- Distance from right end to last connector: 3 ± 0.1

Labels and dimensions for the cable components include:

- No. 1, No. 2, No. 68, No. 34, No. 67, No. 35
- GND (Ground)
- $\phi 1.3 \pm 0.05$ (Cable diameter)
- $68-0.37 \pm 0.03$ (Cable length)
- $P=0.635 \pm 0.03$ (Pitch)
- 1.9 ± 0.1 (Distance from left end to first connector)

Technical drawing of the rear view of a connector housing. The drawing includes the following dimensions and features:

- Overall Width:** 61MIN (indicated by a feature control symbol '2' in a triangle).
- Internal Width:** 52.8 ± 0.05.
- Top Flange Thickness:** 1.8MIN.
- Card End Face Position:** Indicated by a dashed line and a label.
- Mounting Hole Diameter:** 2.6MIN.
- Mounting Hole Spacing:** 21.2MAX and 26.2MIN.
- Overall Height:** 56.7 ± 0.05.
- Internal Height:** 4.75 ± 0.05.
- Internal Width (Lower Section):** 54.75 ± 0.05.
- Mounting Hole Diameter (Lower Section):** 2-φ2.2^{+0.1}₀.
- Mounting Hole Spacing (Lower Section):** 50.6MAX and 56.85MIN (both indicated by feature control symbols '2' in triangles).
- Prohibition Area for Mounting Component:** Indicated by hatched areas on the top flange.
- Contact Area of Shield Plate:** Indicated by a cross-hatched area.
- Shield Plate Thickness:** 2MIN.
- Shield Plate Spacing:** 3.05MIN.
- Overall Width (Lower Section):** 59.5 ± 0.05 (indicated by a feature control symbol '2' in a triangle).
- Feature Control Symbols:** '2' in a triangle, indicating a specific manufacturing requirement.

FORM NO. 229

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[IC11SA-PLR-SF-EJL\(71\)](#)