


CATALOG LISTING	V7-5D17E9	PAGE 1 OF 1	RELEASE NO. PR-22719	REPLACES												
ISSUE	M	4	CHECK													
REVISIONS	<table border="1"> <tr> <td>A</td> <td>REL PR22719</td> </tr> <tr> <td>B</td> <td>DCS 10 APR 97</td> </tr> <tr> <td>C</td> <td>CO-93311</td> </tr> <tr> <td>D</td> <td>TSM 26 OCT 98</td> </tr> <tr> <td>E</td> <td>0005782</td> </tr> <tr> <td>F</td> <td>RJ 04 JUN 04</td> </tr> </table>				A	REL PR22719	B	DCS 10 APR 97	C	CO-93311	D	TSM 26 OCT 98	E	0005782	F	RJ 04 JUN 04
A	REL PR22719															
B	DCS 10 APR 97															
C	CO-93311															
D	TSM 26 OCT 98															
E	0005782															
F	RJ 04 JUN 04															
FORMTEK	DRAWN	10 APR 97	CHECK	AK												
DCS																

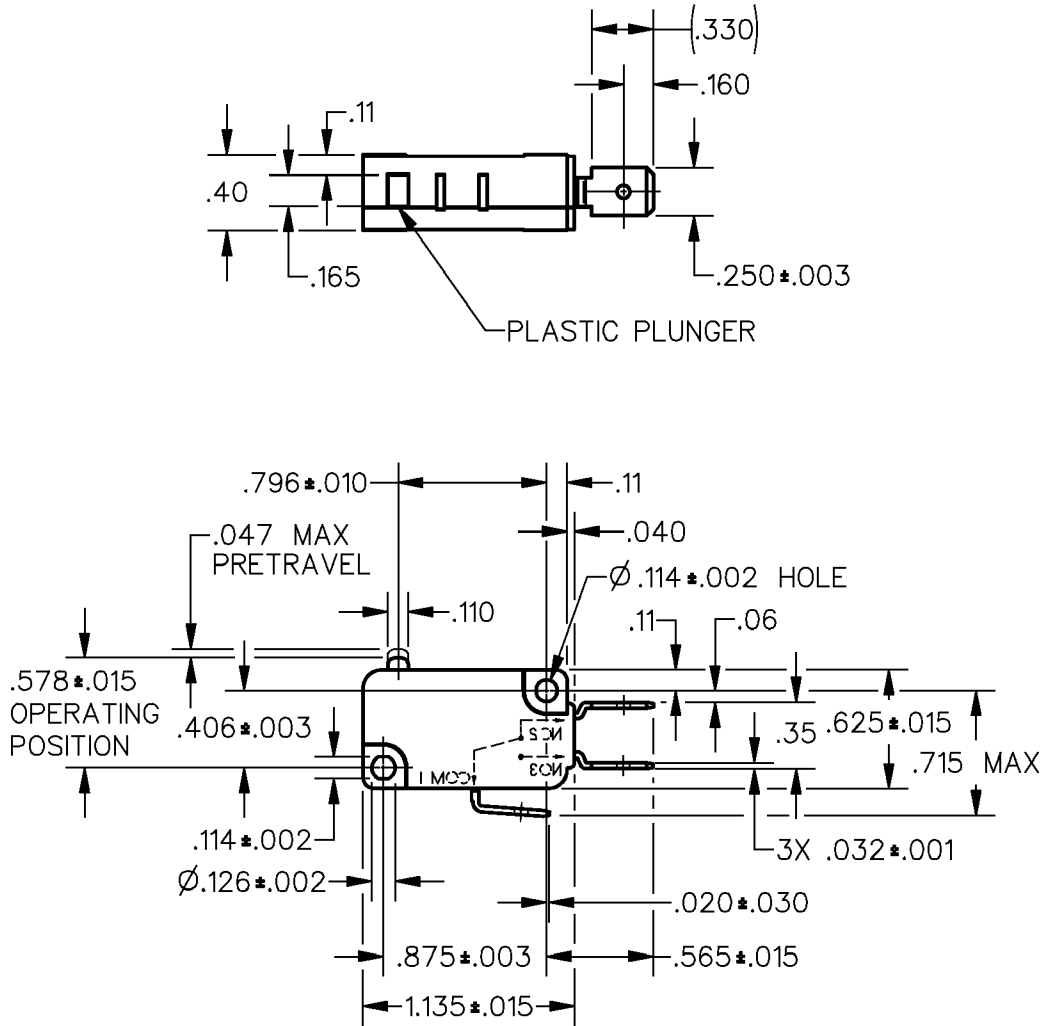


NOTES

- 1 — IN INSPECTION, DO NOT BURN OUT — GOLD CONTACTS
- 2 — IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 3 — INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 15 GRAMS MAX	CONTACT ARRANGEMENT	<b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b>	
DIFFERENTIAL TRAVEL — — — .002-.010	S P D T		
OVERTRAVEL — — — — .050 MIN	L22 1A 125 VAC	ONE PLACE ( .0 )	±.030
FREE POSITION — — — — .625 MAX		TWO PLACE ( .00 )	±.015
RELEASE TRAVEL — — — — .010 MIN		THREE PLACE ( .000 )	±.005
		ANGLES	±
		WEIGHT	



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V7-5D17E9](#)