

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-6B19D8-057

CW-C6001

X97774-V7

REPLACES

RELEASE NO. PR-20758

CATALOG LISTING

V7-6B19D8-057



M

ISSUE
1

CHECK

REVISIONS


CHECK

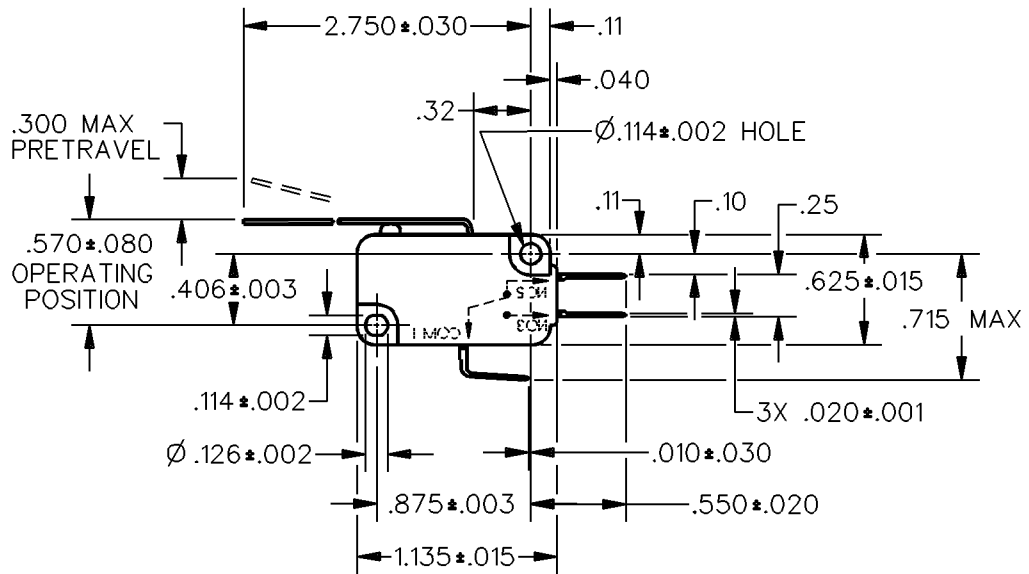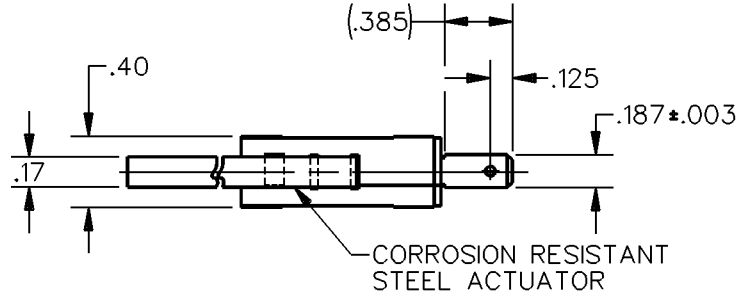

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — 55 GRAMS MAX
RELEASE FORCE — — — 3 GRAMS MIN
DIFFERENTIAL TRAVEL — — .100 MAX
OVERTRAVEL — — — — .145 MIN
RELEASE TRAVEL — — — — .035 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"

SCALE

FULL

DO NOT
SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT



DDM/CAD

DRAWN

CHECK

G R T 24 SEP 93

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V7-6B19D8-057](#)