


8


SPECIFIED VALUE


BETWEEN 3 TO 16 VOLTS. ALL SPECIFICATIONS WILL NOMINALLY BE CHANGED BY A RATIO OF $V_{\text{excitation}}/5.0$ volts. For example: IF

THE EXCITATION VOLTAGE IS 3.0 VOLTS THEN BOTH THE FULL SCALE

OUTPUT VOLTAGE AND THE OFFSET VOLTAGE WOULD BE 3/5TH THE

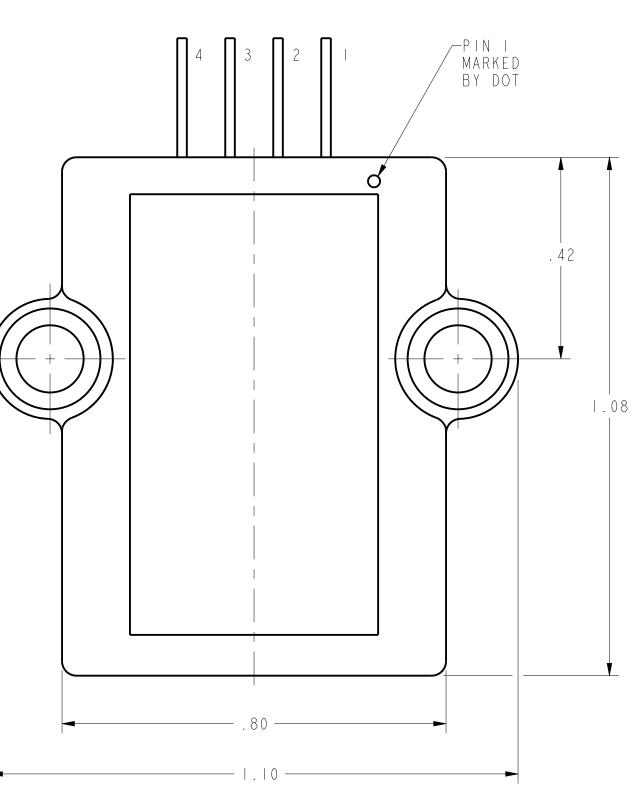

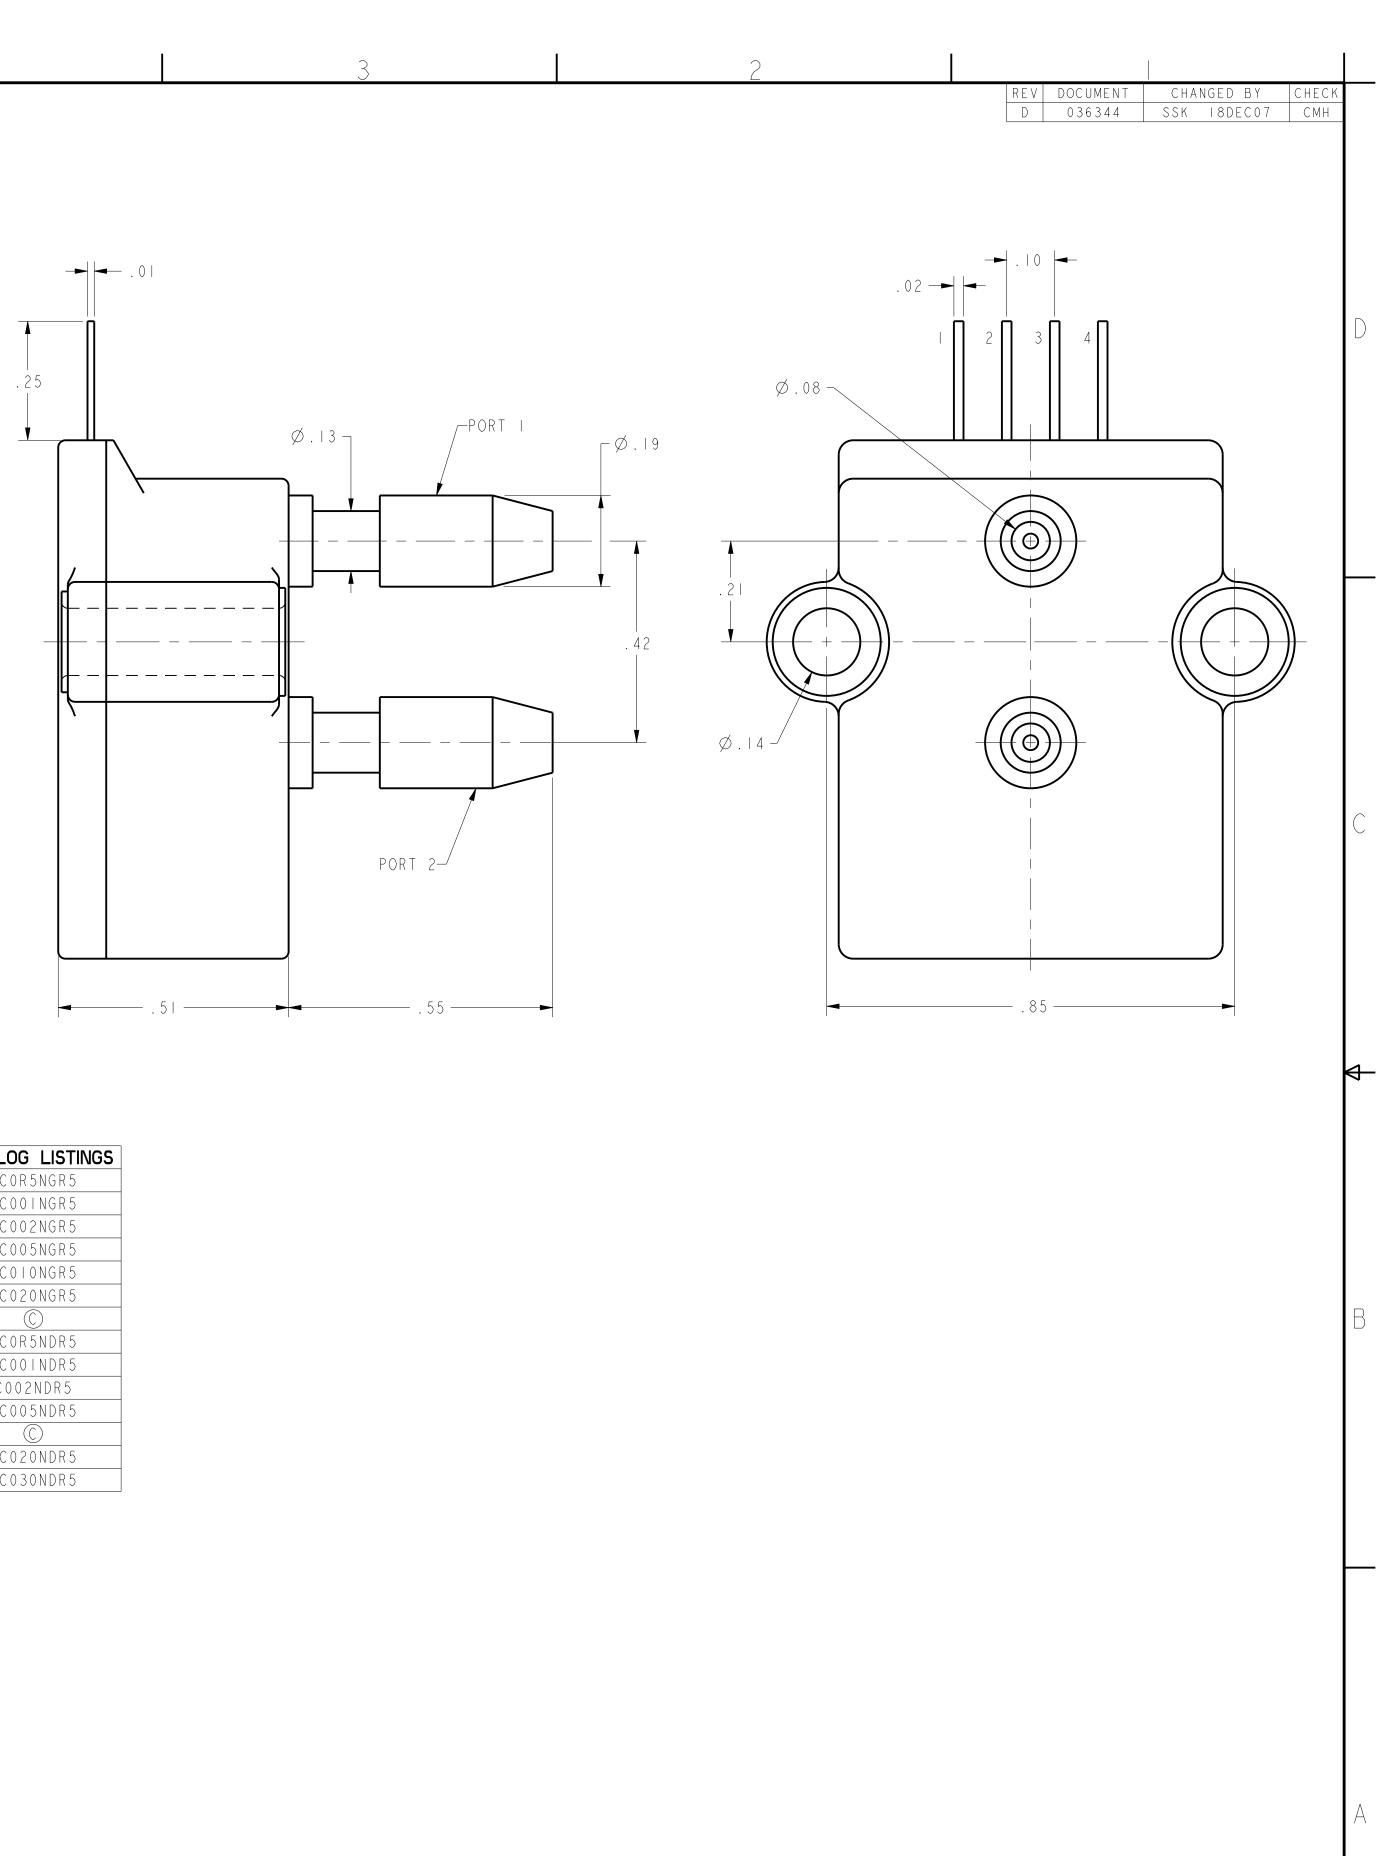

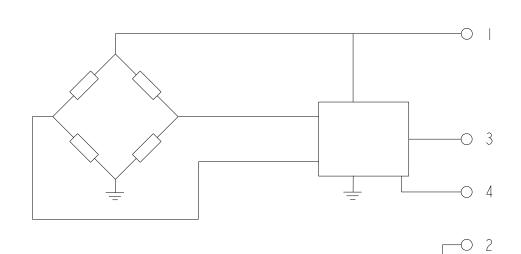

EQUIVALENT CIRCUIT

	PIN OUT							
	VEXCITATION							
2	COMMON							
3	V _{output}							
4	NOT FOR CUSTOMER USE. DO NOT CONNECT.							

CATALOG LISTINGS
DCOR5NGR5
DCOOINGR5
DCOO2NGR5
DC005NGR5
DCOIONGR5
DC020NGR5
\bigcirc
DCOR5NDR5
DCOOINDR5
DCOO2NDR5
DC005NDR5
\bigcirc
DC020NDR5
DC030NDR5

DESIGN UNITS: TOLERANCES UNLE			
NO PLACES ONE PLACE TWO PLACE	X . X . XX	± ± ±	
THREE PLACE FOUR PLACE	. X X X . X X X . X X X X X	±	0
		PROJECTION	
3	$\underline{\Theta}$		

4

0 400	DRAWN Check	S K C M H	I 20C T 0 6 I 20C T 0 6			Но	neywo	ell			
0.400 0.030 0.015 0.005 0.0005	O THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE	PRESSURE SENSOR						
3	INTERPRET PER ASME YI4.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		s i ze D	TYPE I	DRAWING NAME DC	SERIES	CH	ART 5		REV D	
		Pro/ENGIN	EER 3D	SCALE	5:1				SHEET	I OF	
			2								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell: DC030NDR5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

DC001NGR5 DC002NDR5 DC005NDR5 DC010NGR5