

MLH Series

All Metal Pressure Sensors



DESCRIPTION

MLH Series pressure sensors combine Application Specific Integrated Circuit (ASIC) technology with a media isolated, metal diaphragm design. This digitally compensated sensor offers value and performance, making it the ideal pressure sensing solution for demanding applications. Fully temperature compensated, calibrated and amplified, the MLH is available in 50 psi to 8,000 psi pressure ranges.

MLH sensors deliver $\pm 0.25\%$ full scale accuracy Best Fit Straight Line (BFSL) and as low as 2% total error over a temperature range of $-40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$ [$-40\text{ }^{\circ}\text{F}$ to $257\text{ }^{\circ}\text{F}$]. Industry standard connectors and process ports are offered for enhanced reliability and user flexibility.

FEATURES

- All metal wetted parts for use in wide variety of fluid applications
- No internal elastomeric seals mean no o-ring compatibility issues
- Amplified outputs eliminate cost of external amplifiers
- Input reverse voltage protection guards against mis-wiring
- Less than 2 ms response time provides accurate, high speed measurement
- Rated IP65 or better for protection from harsh environments

The MLH has six standard output options:

- A. 0.5 Vdc to 4.5 Vdc ratiometric from 5 Vdc excitation
- B. 4 mA to 20 mA
- C. 1 Vdc to 6 Vdc regulated
- D. 0.25 Vdc to 10.25 Vdc regulated
- E. 0.5 Vdc to 4.5 Vdc regulated
- G. 1 Vdc to 5 Vdc regulated

POTENTIAL APPLICATIONS

- Compressors
- Refrigeration and HVAC/R
- General industrial
- General hydraulics
- Multiple transportation applications including braking and alternate fuels
- Medical

MLH Series

Table 1. Pressure Range Specifications¹ (At 25 °C [77 °F] and at rated excitation unless otherwise specified.)

psi												
Pressure	50	100	150	200	250	300	500	1000	2000	3000	5000	8000
Proof pressure	150	300	450	600	750	900	1500	2000	4000	6000	7500	12000
Burst pressure	500	1000	1500	2000	2500	3000	5000	10000	20000	30000	30000	30000
bar												
Pressure	6	10	16	25	40	60	100	160	250	350	500	550
Proof pressure	18	30	48	75	80	120	200	320	500	700	750	825
Burst pressure	60	100	160	250	400	600	1000	1600	2068	2068	2068	2068

Note:

1. Comparable metric units follow same proof and burst specifications.

Table 2. Physical and Environmental Specifications

Parameter	Characteristic
Material in contact with media	port: stainless steel 304L; diaphragm: Haynes 214 alloy
Housing material	black plastic – Amodel AS-4133 HS – PPA
Weight	57.0 g [2.0 oz] (typical for Delphi Metri-Pack 150 and 1/8 NPT port)
Shock	100 g peak [11 ms]
Vibration	MIL-STD-810C, Figure 514.2-5, Curve AK, Table 514.2-V, Random Vibration Test [overall g rms = 20.7 min.]
Compensated and operating temperature range: 0.5 Vdc to 4.5 Vdc ratiometric output all regulated and 4 mA to 20 mA outputs	-40 °C to 125 °C [-40 °F to 257 °F] -40 °C to 125 °C [-40 °F to 257 °F] See Figures 2 and 3 for operating area details.
Storage temperature range	-40 °C to 125 °C [-40 °F to 257 °F]
Approvals	UL Component Recognition for USA and Canada: File No. E258956

Table 3. Electrical Specifications (At 25 °C [77 °F] and at rated excitation unless otherwise specified.)

Parameter	Ratiometric (A)	Current (B)	Regulated (C)	Regulated (D)	Regulated (E)	Regulated (G)
Zero output	0.5 Vdc	4 mA	1 Vdc	0.25 Vdc	0.5 Vdc	1 Vdc
Full scale span (FSS)	4 Vdc (0.5 Vdc to 4.5 Vdc)	16 mA (4 mA to 20 mA)	5 Vdc (1 Vdc to 6 Vdc)	10 Vdc (0.25 Vdc to 10.25 Vdc)	4 Vdc (0.5 Vdc to 4.5 Vdc)	4 Vdc (1 Vdc to 5 Vdc)
Excitation	5 Vdc (6 Vdc max.) ¹	9.5 Vdc to 30 Vdc ²	8 Vdc to 30 Vdc ²	14 Vdc to 30 Vdc ²	7 Vdc to 30 Vdc ²	8 Vdc to 30 Vdc ²
Supply current	4 mA typ. (8 mA max.)	N/A	5 mA typ. (17 mA max.)	5 mA typ. (17 mA max.)	5 mA typ. (17 mA max.)	5 mA typ. (17 mA max.)
Source (nominal)	1 mA	N/A	1 mA	1 mA	1 mA	1 mA
Sink (nominal)	1 mA at zero output	N/A	1 mA at zero output	1 mA at zero output	1 mA at zero output	1 mA at zero output
Supply rejection ratio	90 dB	90 dB	90 dB	90 dB	90 dB	90 dB
Output impedance	25 Ω max.	N/A	25 Ω max.	25 Ω max.	25 Ω max.	25 Ω max.

Notes:

1. Maintains ratiometricity at 5 ±0.25 Vdc excitation. Product can tolerate 6 Vdc excitation without damage.
2. See Figures 2 and 3 for more information regarding maximum excitation voltage vs. operating temperature.

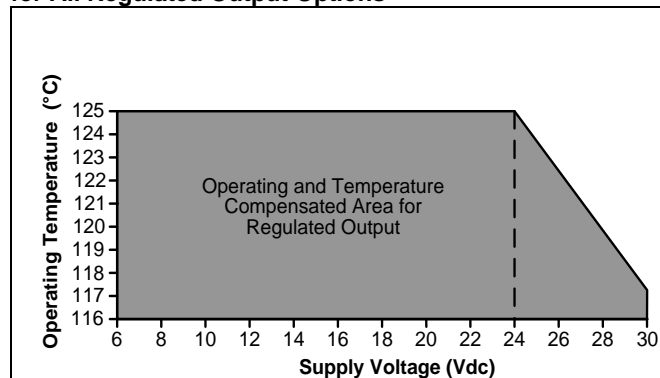
All Metal Pressure Sensors

Table 4. Performance Specifications (At 25 °C [77 °F] and at rated excitation unless otherwise specified.)

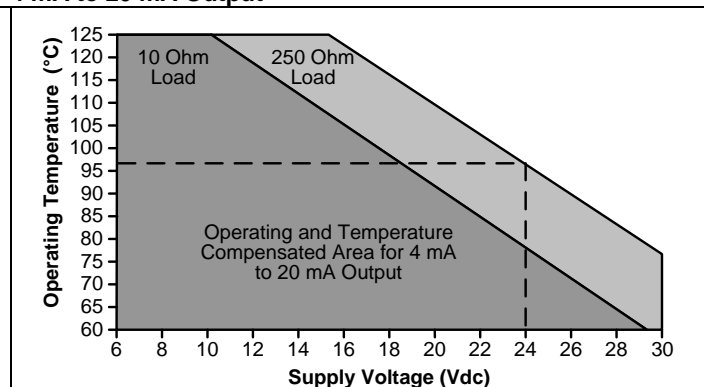
Parameter	Characteristic
Response time	<2 ms
Accuracy ¹ :	
≥100 psi	±0.25% FSS
<100 psi	±0.50% FSS
Total error band ² :	
Gage:	
<300 psig	±3% FSS
≥300 psig	±2% FSS
Seal gage:	
≥300 psig	±2% FSS
Seal gage without L, M, P termination:	
100 psis to 299 psis (-40 °C to 85 °C [-40 °F to 185 °F])	±3% FSS
100 psis to 299 psis (>85 °C to 125 °C [>185 °F to 257 °F])	±10% FSS
≥300 psis (-40 °C to 125 °C [-40 °F to 257 °F])	±2% FSS
Seal gage with L, M, P termination:	
100 psis to 299 psis (-40 °C to 65 °C [-40 °F to 149 °F])	±10% FSS
100 psis to 299 psis (>65 °C to 125 °C [>149 °F to 257 °F])	±15% FSS
≥300 psis (-40 °C to 65 °C [-40 °F to 149 °F])	±5% FSS
≥300 psis (>65 °C to 125 °C [>149 °F to 257 °F])	±15% FSS

Notes:

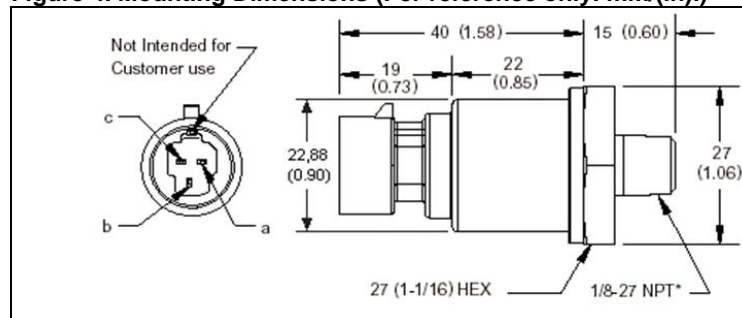
1. Includes pressure non-linearity (BFSL), pressure hysteresis and non-repeatability. Thermal errors are not included.
2. Includes zero error, span error, thermal effect on zero, thermal effect on span, thermal hysteresis, pressure-non-linearity, pressure hysteresis and non-repeatability.

Figure 2. Operating and Temperature Compensated Area for All Regulated Output Options

Note:

The dashed line indicates the operating and temperature compensated area with a 24 V supply.

Figure 3. Operating and Temperature Compensated Area for 4 mA to 20 mA Output

Note:

The operating area is extended with a 250 Ohm resistor. Higher loads extend the operating area. The dashed line indicates the operating and temperature compensated area with a 24 V supply using a 250 Ohm load.

Figure 4. Mounting Dimensions (For reference only. mm/(in.))

Pin and Wire Codes (Option B – Packard)

Pin	Voltage	Current
a	+ excitation	+ excitation
b	output	- excitation
c	common	no connection

A variety of pressure ports and electrical termination connection options are available. Refer to the "How to Order" on previous page for possible combinations. Contact your Honeywell representative for details.

Nomenclature and Order Guide¹

		MLH			
Series				Output Signal	
Pressure Range	psi	bar			
	050 500	006 100			
	100 01K	010 160			
	150 02K	016 250			
	200 03K	025 350			
	250 05K	040 500			
	300 08K	060 550			
Unit	P = psi B = bar				
Measurement Type	G = Gage (psi) S = Sealed gage (psi) ⁴				
Electrical Termination	B = Delphi Metri-Pack 150 C = Hirschmann (mates with G4W1F) D = M12 x 1 (Brad Harrison micro) G = DIN 43650-C, 8 mm-male H = Amp Superseal 1.5 ² L = Cable (1 m) M = Cable (3 m) P = Flying leads (20 AWG – 6 in) T = Deutsch DTM04-3P (integral)				
(Mating connectors are not supplied.)					
			Pressure Connection		
			A = 0.5 Vdc to 4.5 Vdc ratiometric from 5 Vdc excitation B = 4 mA to 20 mA C = 1 Vdc to 6 Vdc regulated D = 0.25 Vdc to 10.25 Vdc regulated E = 0.5 Vdc to 4.5 Vdc regulated G = 1 Vdc to 5 Vdc regulated		
			01 = 1/4-18 NPT 02 = M12 x 1.5 (ISO 6149) ³ 03 = M14 x 1.5 (ISO 6149) ³ 04 = 3/8-24 UNF (SAE-3 O-ring boss) ³ 05 = M18 x 1.5 (ISO 6149) ³ 06 = 1/8 in-27 NPT 07 = 1/2 in-20 UNF (SAE-5 O-ring boss) ³ 08 = M10 x 1 (ISO 6149) ³ 09 = 1/4 in SAE female Schrader (7/16-20 UNF-2B internal thread) 10 = 7/16-20 UNF (SAE-4 O-ring boss) ³ 11 = 1/2 in NPT 12 = 9/16-18 UNF (SAE-6 O-ring boss) ³ 13 = R 1/4-19 BSPT (ISO 7-1 tapered thread) 14 = G 1/4-19 (DIN 3852-2) ³ 15 = G 1/8 with O-ring groove ³ 16 = M16 x 1.5 (ISO 6149) ³ 17 = G 1/4 with O-ring groove ³ 18 = G 1/8 (DIN 3852-2) ³ 19 = R 1/8-28 BSPT (ISO 7-1 tapered thread) 20 = M20 x 1.5 (ISO 6149) ³ 21 = 1/2-20 (SAE J514) ³		

Notes:

1. Not all combinations are available. Minimum quantity orders apply. Additional pressure ranges, port styles and special calibration versions are available. Contact your local sales representative for assistance.
2. Available with “A” output only.
3. Supplied with O-ring.
4. Sealed gage devices are not available for pressure ranges below 100 psi.

Notes:

- Not all combinations are available. Minimum quantity orders apply. Additional pressure ranges, port styles and special calibration versions are available. Contact your local sales representative for assistance.
- Available with "A" output only.
- Supplied with O-ring.
- Sealed gage devices are not available for pressure ranges below 100 psi.

⚠ WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

⚠ WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:

Asia Pacific	+65 6355-2828
	+65 6445-3033 Fax
Europe	+44 (0) 1698 481481
	+44 (0) 1698 481676 Fax
Latin America	+1-305-805-8188
	+1-305-883-8257 Fax
USA/Canada	+1-800-537-6945
	+1-815-235-6847
	+1-815-235-6545 Fax

Sensing and Control

Honeywell

1985 Douglas Drive North

Golden Valley, MN 55422

www.honeywell.com/sensing

008118-7-EN IL50 GLO Printed in USA

February 2011

Copyright © 2011. Honeywell International Inc. All rights reserved.

Honeywell

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

MLH250BSL14A	MLH250BSM14A	MLH350BSD14B	MLH500BSD08E	MLH500BSD14B	MLH500BST14A
MLH550BSD14C	MLH550BSD14E	MLH200PGB01A	MLH200PGL01A	MLH300PSD01A	MLH02KPSD01A
MLH100PGD14B	MLH100PSC06A	MLH01KPST04A	MLH100PGP01A	MLH02KPSB10A	MLH150PGD01E
MLH03KPSL06G	MLH02KPSL06A	MLH050PGL06A	MLH150PGP01E	MLH300PGL06A	MLH150PGL06G
MLH500PSD13B	MLH050PGG20B	MLH100PGP10A	MLH300PGL01B	MLH250PSM01B	MLH300PSG01G
MLH050PGT01B	MLH100PGB06C	MLH100PSB06G	MLH050PGB20B	MLH100PGB06E	MLH02KPSB01A
MLH050PGD01B	MLH02KPSG06A	MLH01KPGB06C	MLH200PGT06B	MLH03KPGL01C	MLH150PGL06A
MLH02KPST10E	MLH150PGT12E	MLH01KPSC06A	MLH01KPSB06G	MLH03KPSB01C	MLH300PSB06B
MLH500PST12E	MLH100PSB10A	MLH01KPSB21A	MLH500PST02A	MLH05KPST10A	MLH300PGB01B
MLH200PGB06A	MLH05KPSD13B	MLH500PGL06A	MLH05KPSL01B	MLH150PGL01C	MLH08KPSL12A
MLH05KPSL10B	MLH300PSB09B	MLH01KPSB06E	MLH300PSD13B	MLH250PGL06G	MLH300PSL06B
MLH100PGD01C	MLH01KPGB01B	MLH050PGM01B	MLH08KPSH03A	MLH100PGL01G	MLH300PGB01A
MLH08KPST03A	MLH150PGP06G	MLH200PSB09A	MLH01KPSD01A	MLH05KPSD01A	MLH200PGL06B
MLH500PSD01B	MLH150PGM01B	MLH500PGL01G	MLH500PST06A	MLH03KPSB17E	MLH300PSM01B
MLH100PGT10A	MLH05KPSP01E	MLH05KPST10G	MLH05KPSB10A	MLH03KPSL06B	MLH03KPSD01B