



REV	DOCUMENT	CHANGED BY	CHECK
2	201510	TSM 13OCT00	SAV

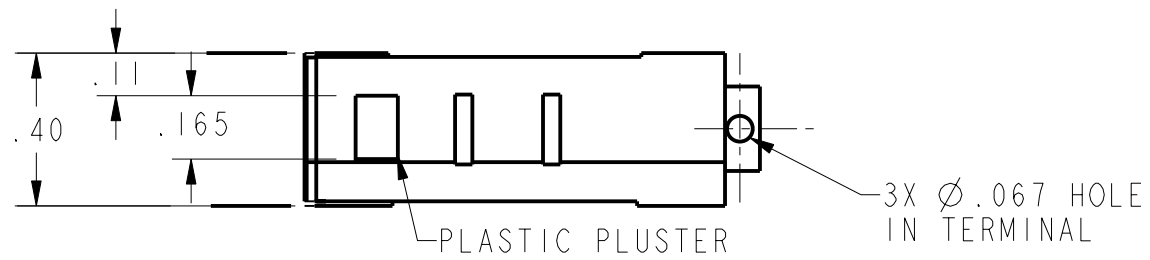

NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - SWITCH MATERIAL WILL WITHSTAND TEMPERATURE OF 300°F
- 3 - HOLE IN TERMINALS MAY BREAK OUT

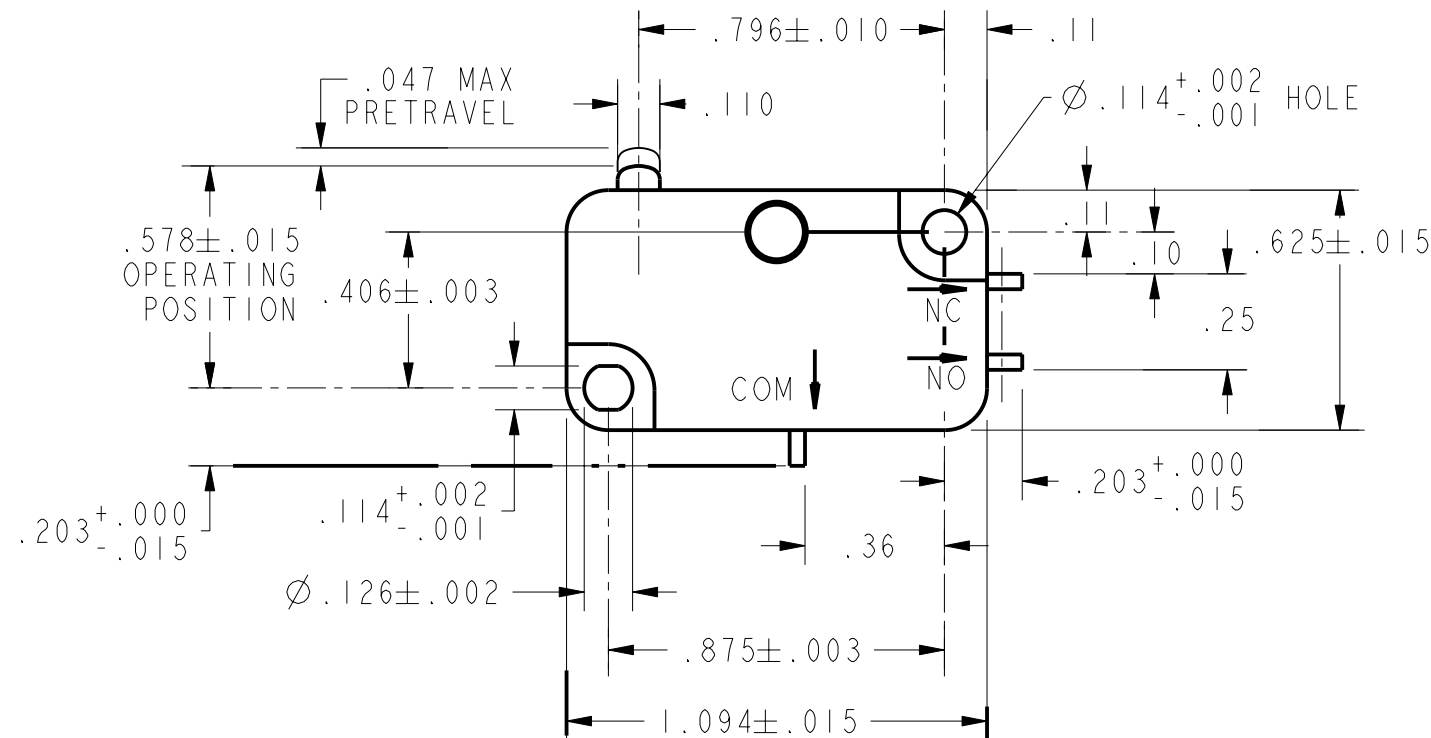

CHARACTERISTICS	
OPERATING FORCE	— .50 GRAMS MAX
RELEASE FORCE	— .5 GRAMS MIN
DIFFERENTIAL TRAVEL	— .002-.010
OVERTRAVEL	— .050 MIN
FREE POSITION	— .625 MAX
RELEASE TRAVEL	— .010 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
L131	
10A 1/4HP 125 OR 250 VAC	
1/2A 125 VDC, 1/4A 250 VDC	
3A 125 VAC "L"	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:			
	<input checked="" type="checkbox"/> US (inch) CUSTOMARY	<input type="checkbox"/> SI (mm) METRIC	
NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±
RAW MATERIAL-COMMERCIAL STANDARD			
THIRD ANGLE PROJECTION			

DRAWN	TSM	13OCT00
CHECK	SAV	13OCT00
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		
PTC 2D	ASME Y14.5M-1994	

Honeywell Sensing and Control			
TITLE SWITCH, BASIC			
SIZE	DWG TYPE	DRAWING NAME	REV
B	M	V3-2139	2
SCALE	2:1	WEIGHT	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V3-2139](#)