


## WIRELESS RECEPTACLE

### R-075-J-DE

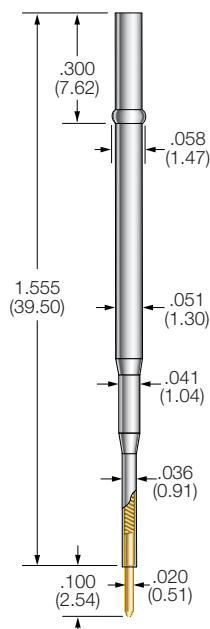

## PROBE SPECIFICATIONS

**Minimum Centers:** .075 (1.91)

**Drill Size:** 1.45mm

**Mounting Hole Size:**  
.055/.057 (1.40/1.45)

**Spring Force:** 2.7 oz. (77g) @  
.070 (1.77) travel

**Maximum Travel:** .100 (2.54)

**Working Travel:** .070 (1.77)

## MATERIALS

**Receptacle:** Nickel/silver,  
gold lined inside

**Spring:** Music wire, gold plated

**Plunger:** Beryllium copper,  
gold plated over nickel

## HOW TO ORDER

**R**

SERIES

**075**

SIZE

**J**


TIP  
STYLE

**DE**


PLATING  
OPTION

## LEAD FREE TEST PROBE

### ICT-075-LF PROBE

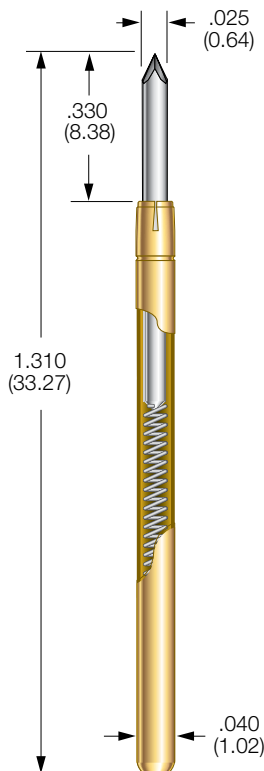

## STEEL PLUNGER TIP



## PROBE SPECIFICATIONS

**Minimum Centers:** .075 (1.91)

**Current Rating:** 3 amps continuous

**Spring Force:** 7.0 oz. @ .170  
(4.32) travel

**Typical Resistance:** < 40 mΩ  
against a lead free surface

**Maximum Travel:** .250 (6.35)

**Working Travel:** .170 (4.32)

## MATERIALS

**Barrel:** G2

**Spring:** Music wire, nickel plated

**Plunger:** Steel, Duralloy™ plated

## HOW TO ORDER

**ICT**

SERIES

**075**

SIZE

**LF**

TIP  
STYLE

**7**

SPRING  
FORCE

**D**

PLATING  
OPTIONS

**S**

STEEL  
PLUNGER

Specifications subject to change without notice. Dimensions in inches (millimeters).



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Smiths Interconnect:](#)

[ICT-075-LF-7-D-S](#) [ICT-075-LF-10-D-S S/C](#)