
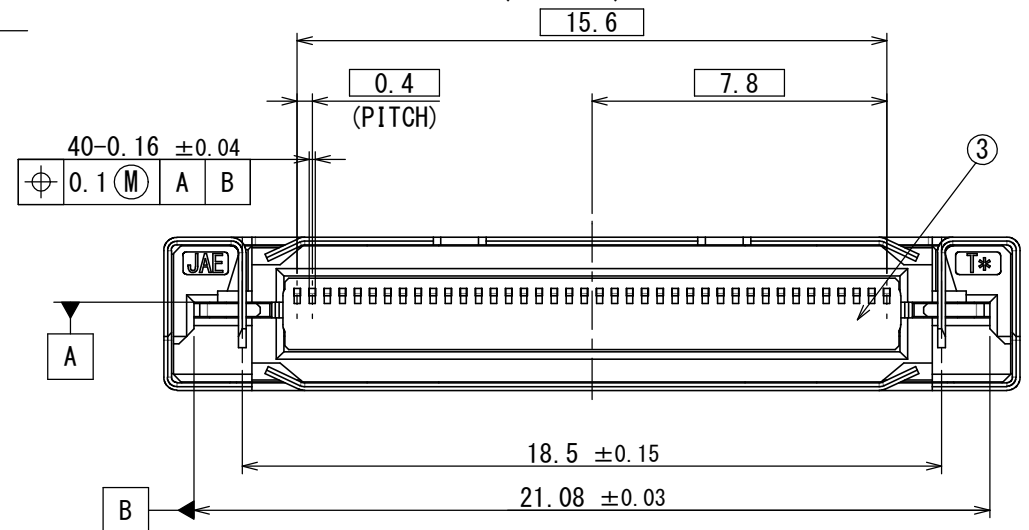
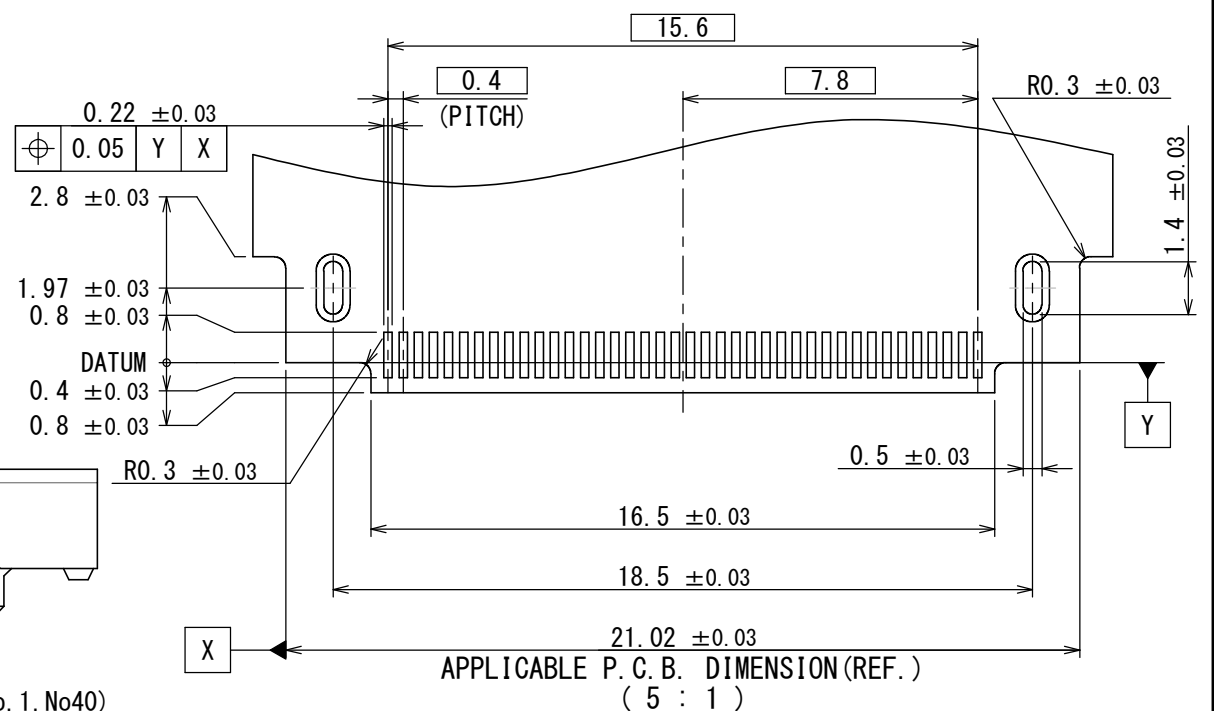
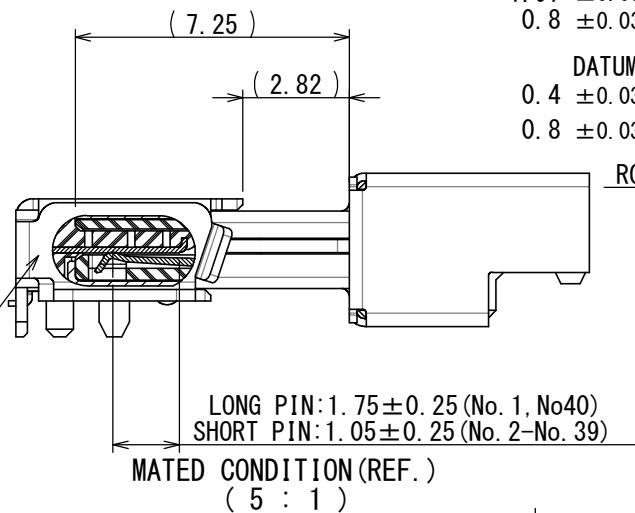
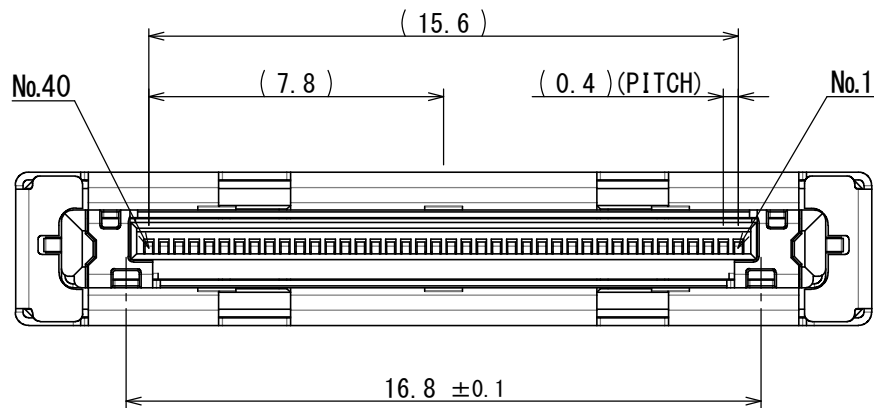


図面番号 (DRAWING NO.) SJ114486

版数 VER.	年月日 DATE	CN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	06/AUG/2013	007176	REVISED SPECIFICATION NUMBER		Y. YOKOYAMA	M. SASAKI	T. SHINDOU

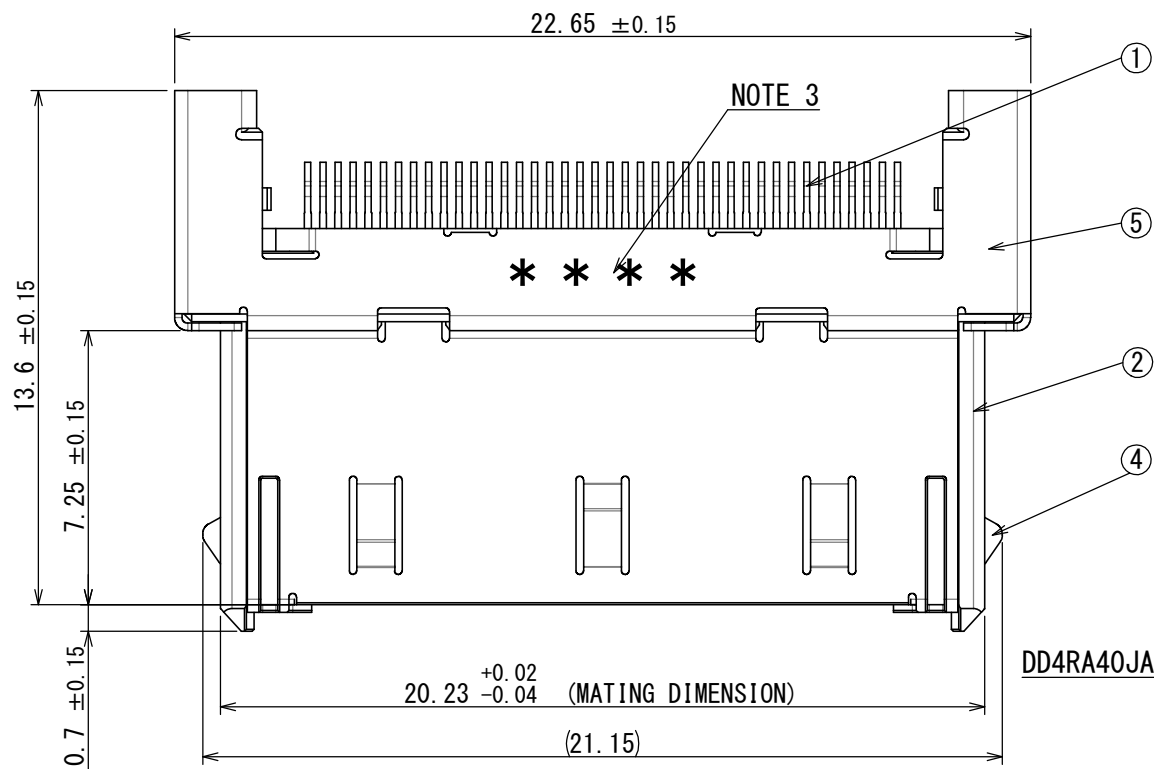

NOTE 1. TERMINAL COPLANARITY IS 0.1mmMAX.
NOTE 2. IT MIGHT BE DIFFERENT FROM ACTUAL CONNECTOR CONFIGURATION AND THE DRAWING
ACCORDING TO THE SHAPE IMPROVING PRODUCTIVITY AND THE EJECTOR PIN.
NOTE 3. PRODUCTION LOT NUMBER AS INDICATED.

5	SHELL	1	STAINLESS STEEL	NICKEL PLATING	
4	LOCK SPRING	2	STAINLESS STEEL	-	
3	INNER INSULATOR	1	SYNTHETIC RESIN	(BLACK)	
2	BASE INSULATOR	1	SYNTHETIC RESIN	(BLACK)	
1	CONTACT	40	COPPER ALLOY	CONTACT AREA: GOLD PLATING OVER NICKEL TERMINAL AREA: GOLD FLASH PLATING OVER NICKEL	PLATING SPEC: NICKEL: 1 μm MIN. GOLD FLASH: 0.03 μm MIN. GOLD: 0.1 μm MIN.

仕様書 (SPECIFICATION) JACS-30256-1 2	第1版 (ORIGINAL DATE) 31/JUL/2013	尺度 (SCALE) 5:1	シリーズ (SERIES) DD4	日本航空電子工業株式会社 JAE JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.	図面番号 (DRAWING NO.) SJ114486	版数 (VER.) 2
一般公差 (GENERAL TOLERANCE) 寸法 (DIMENSION) ±0.8 × ±0.4 ×× ±0.1 ××× ±	角度 (ANGLES) ° ± °' ± 単位 (UNIT) : mm	製図 DR. Y. YOKOYAMA 担当 CHK. M. SASAKI 査閲 APPD. T. SHINDOU 承認 APPD.	名称 (TITLE) DD4PA40MA1 質量 (MASS)			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[DD4PA40MA1R900](#)