



DOUBLE DENSITY TYPE · D02 SERIES

D02 SERIES



D02 STANDARD SHELL



(The pictures here show connectors with contacts loaded.)

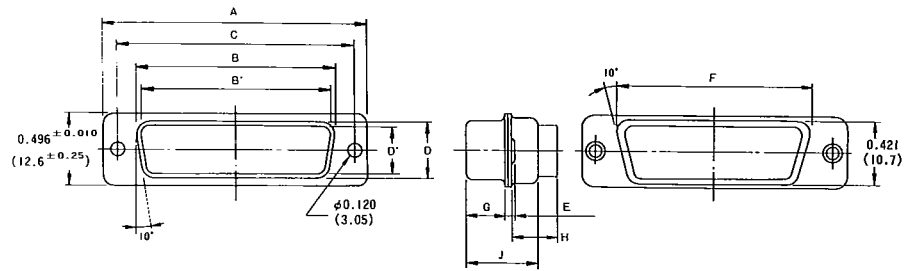

D02F. FLOAT MOUNTING SHELL (socket side only)

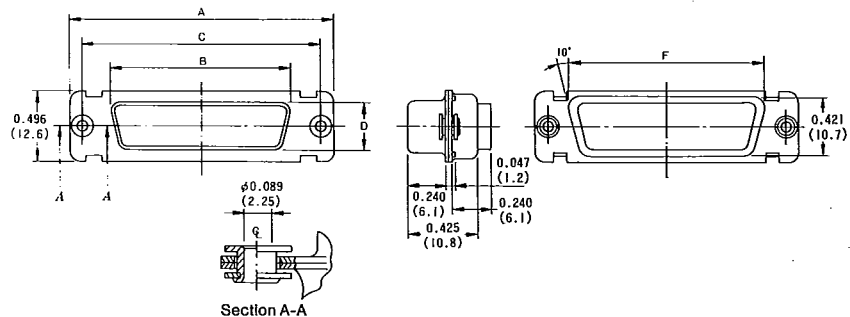

NOTE: Float mounted connector has .032 in. (0.81 mm) total diametral float.

No. of Contacts		Part Number	A ±.020 (±0.5)	B ±.010 (±0.25)	B' ±.010 (±0.25)	C ±.005 (±0.13)	D ±.010 (±0.25)	D' ±.010 (±0.25)	E ±.020 (±0.5)	F ±.016 (±0.4)	G ±.016 (±0.4)	H ±.020 (±0.5)	J ±.031 (±0.8)
29	Pin side	D02-29P-FO	1.539 (39.1)	—	.994 (25.24)	1.312 (33.32)	—	.328 (8.34)	.047 (1.2)	1.083 (27.5)	.236 (6.0)	.299 (7.6)	.421 (10.7)
	Socket side	D02-29S-FO	1.539 (39.1)	.968 (24.59)	—	1.312 (33.32)	.308 (7.82)	—	.047 (1.2)	1.083 (27.5)	.240 (6.1)	.240 (6.1)	.425 (10.8)
50	Pin side	D02-50P-FO	2.087 (53.0)	—	1.536 (39.01)	1.852 (47.04)	—	.331 (8.40)	.059 (1.5)	1.626 (41.3)	.236 (6.0)	.299 (7.6)	.421 (10.7)
	Socket side	D02-50S-FO	2.087 (53.0)	1.508 (38.30)	—	1.852 (47.04)	.308 (7.82)	—	.047 (1.2)	1.626 (41.3)	.240 (6.1)	.240 (6.1)	.425 (10.8)


(Note) For float mounting shell (socket side only), add letter "F" after series prefix D02.
Example ... D02F-29S-FO

CONTACTS FOR D02 SERIES

CRIMP CONTACTS

Pin contacts

Socket contacts




Contact Size	Part Number		Applicable Wire (AWG)
	Pin	Socket	
22-22	030-51451	030-51453	#22 ~ #24
22-26	030-51452	030-51454	#26 ~ #28


Contact Size	A	φD	Hand Crimp Tool		Insertion/Extraction Tool
			Main body	Locator	
22-22	.226 (5.75)	.035 (0.89)	M22520/2-01	JP-D02	IE-D02-C
22-26	.222 (5.65)	.026 (0.66)			

PCB THROUGH HOLE CONTACTS

Part description: 030-51455 (Pin contact only)



PCB HOLE PATTERNS

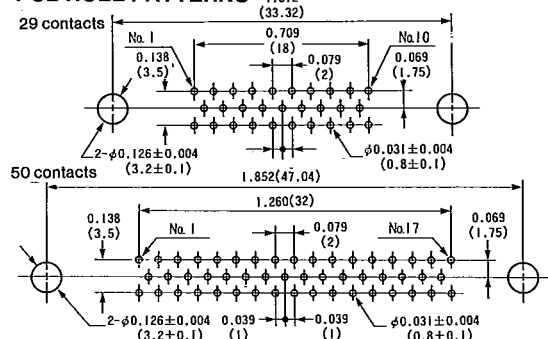

DOUBLE DENSITY

D02 SERIES CONNECTORS

The D02 series are high density connectors containing approximately twice as many contacts as D Sub connectors in the same shell size. The connectors are compact, light, and reliable. Both crimp contacts and printed circuit board through-hole contacts are available.

FEATURES

- **Crimp contacts for easy wire connections**

Easy to use crimping tools significantly improve work efficiency. Contacts are inserted into the rear of the connector after wire termination.

- **Removable contacts**

The contacts can be removed easily using a simple tool in case of circuit changes or incorrect wiring.

- **Common accessories for D Sub series**

The connector body (shell) is the same as that of the other D Sub connectors, and therefore all standard accessories, such as a junction shells can be used.



- **Printed Circuit Board Mounting**

Through hole right angle contacts and straight (pin only) contacts for direct mounting (soldering) on a printed circuit board are also available. Connectors and contacts are ordered separately.

- **Crimping tools**

The manual tool is compact and easy to operate. Uniform, consistent results.

* Refer to pages 64 to 67 for details on tool handling.

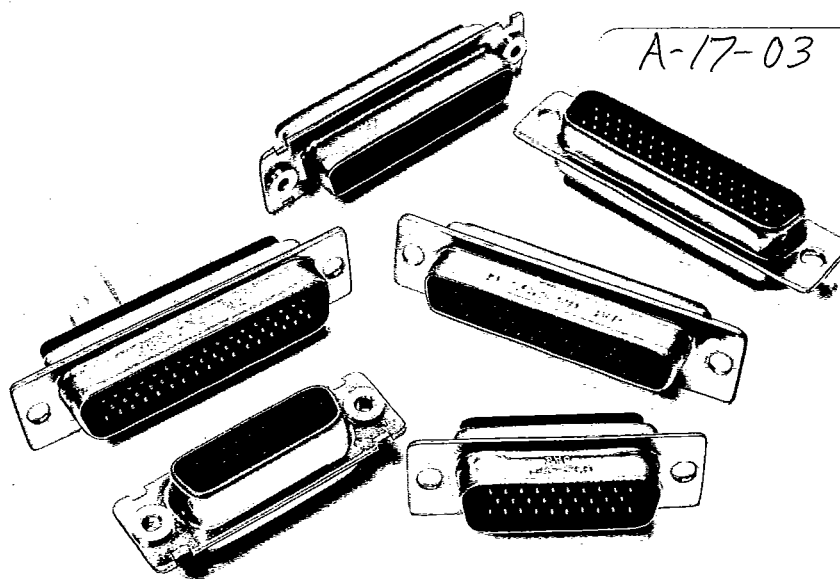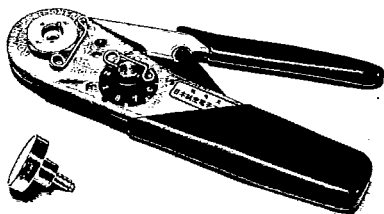

HOW TO ORDER

D02 -29P-FO
D02F-29S-FO

- **FO:** Connector less contacts (not stamped on connector)
- **Contact type:** P... Pin, S... Socket
- **Contact arrangements:** 29 and 50
- **Mounting style:** No designator... Standard F... Float mount (Rear mount)
- **Series prefix**

NOTE: Connectors and contacts must be ordered separately.

STANDARD DATA

- **Materials/Finishes**

	Material	Finish
Contacts	Copper alloy	Gold over nickel
Insulator	Synthetic resin	UL94V-0, black
Shell	Steel	Yellow chromate over zinc plate

- **Specifications**

No. of Contacts	29 and 50
Current Rating	3 amp max.
Voltage Rating	300 V AC r.m.s. max.
Dielectric Rating	900 V AC r.m.s. (Initial)
Insulation Resistance	5,000 megohms min. (at 500 V DC)
Contact Resistance	10 milliohms max. (Initial)
Operating Temperature Range	-67°F ~ +185°F (-55°C ~ +85°C)

- **Applicable wire**



AWG #22 to #28 stranded or solid

CONTACT ARRANGEMENTS

Face view, Bin Insert

29 contacts


50 contacts



FEATURES

• **Five different shell sizes and numbers of conductors**

The connector housing is compact and rectangular. The contacts and insulators are contained in a rugged steel shell. There are five shell sizes (E, A, B, C, and D), respectively with standard contact counts of 9, 15, 25, 37, and 50. Special layouts to accept coaxial, high-voltage, and high-current contacts are also available.

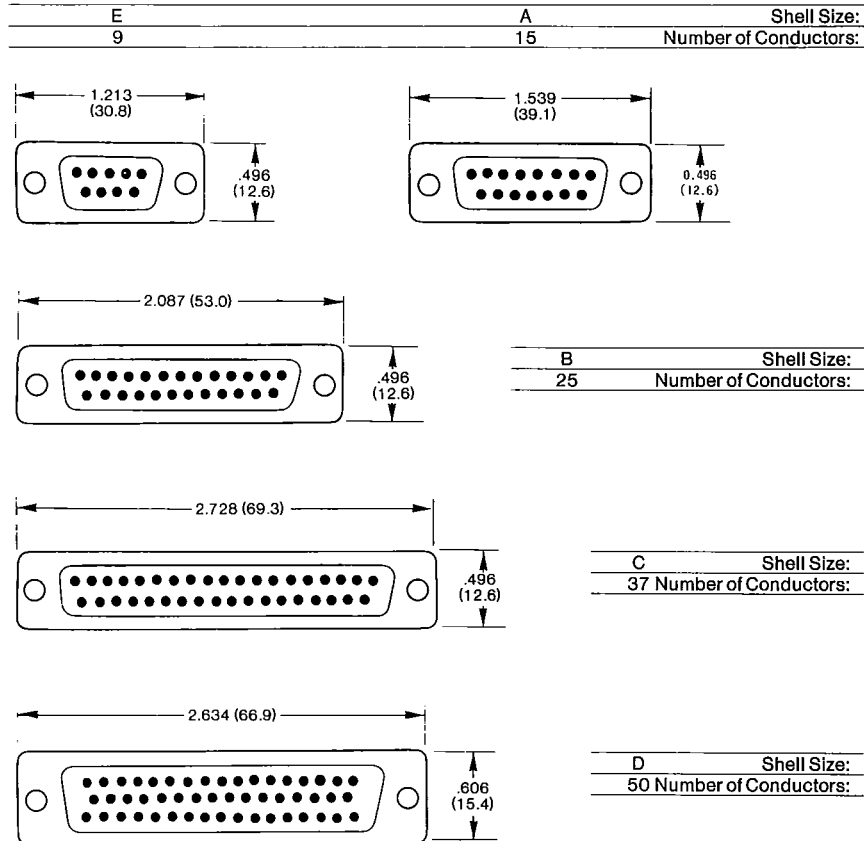


Special Layouts (D*M Type)



• **Fail-Safe Polarizing Mechanism**

The shell connecting part is keystone trapezoidal which inherently prevents incorrect coupling.

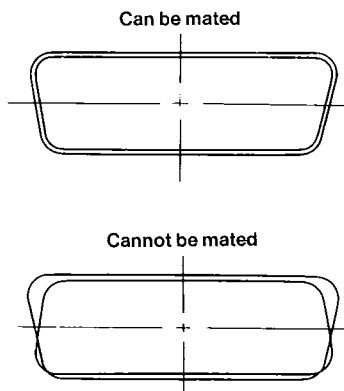

• **Official Standards**

D Sub connectors conform to many international standards including:

Japan Industrial Standards

JIS-C-6361

JIS-C-6366

JIS-C-6367

Japan Defense Agency Standards

NDSXC 6116

DSP C 6242


US Military Standards

MIL-C-24308



• **Shell Type**

The shell profile comes in a panel-mounting standard type and floating type (the latter aids in rack-to-panel connection).

Standard Type




Floating Type

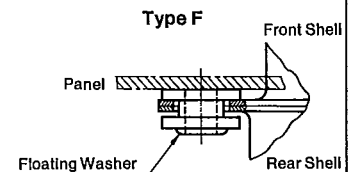

The floating washer moves .030 in. (0.4 mm) in any direction relative to the center (CL).

• **Close Entry Construction**

Socket insulators have a closed entry construction which prevents entry of oversized contacts or probes.



• **Compatibility**

Individual connector types are interchangeable as are the accessories.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[030-51454](#) [030-51451](#) [030-51452](#)