


JKL PART NUMBER	- A - LENGTH	COLOR 5000 °k	STARTING CIRCUIT VOLTAGE VS (Vrms) @ 0°C	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
CF26346-37B	346±3.0	x = .345±.01	1450	700	0.1	20,000,459/	40.000
CF26397-37B	397±3.0		1520	725			
CF26448-37B	448±3.0		1820	870			
CF26499-37B	499±3.0	y = .360±.01	2100	1000	6± 1	36,000±15%	40,000
CF26550-37B	550±3.0		2270	1100			
CF26600-37B	600±3.0		2340	1125			

\*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

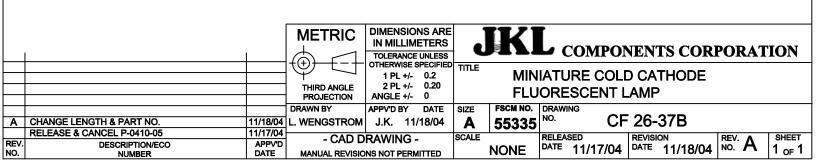

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JKL Components: CF26600-37B