



Rating	3A 125V AC, 1.5A 250V AC 6A 14V DC, 3A 28V DC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max		
Insulation Resistance	DC 500V 100M ohm Min		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	0°C~85°C		
Switch Function	2P SPST OFF-(ON)		


Material:

Frame: Nylon 66+33%GF, Black(94-V2)

Actuator: PC, Red(94-V2)

Terminasl: Sliver plated, Copper alloy

Contacts: Sliver plated, Copper alloy

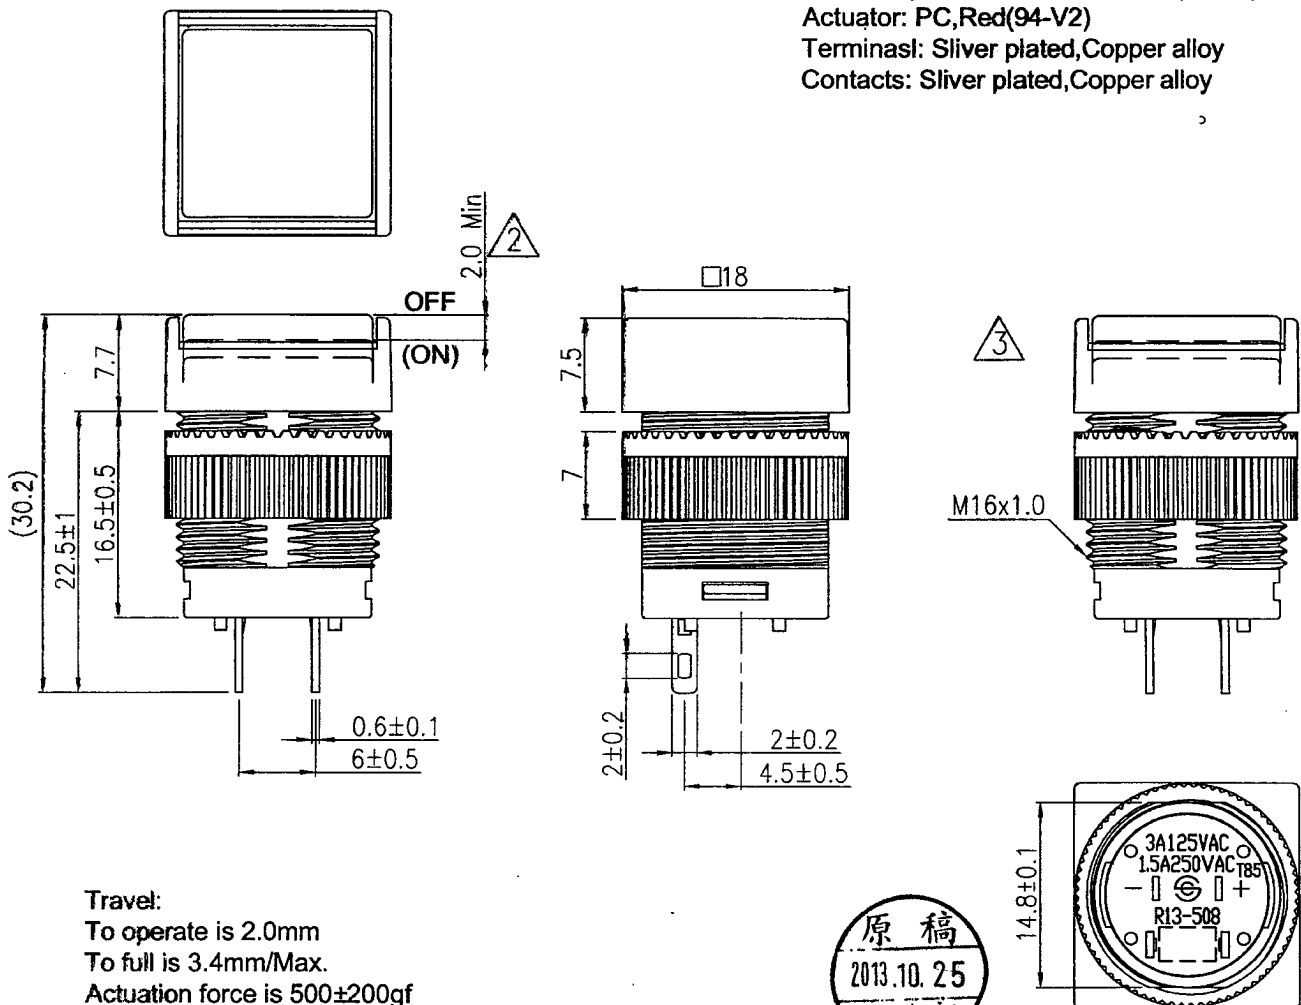

Travel:

To operate is 2.0mm

To full is 3.4mm/Max.

Actuation force is 500±200gf

Tolerances ±0.3 Unless Otherwise Specified

08/20/13	柳新強	依實物修正圖面(更改視圖方向)		△
05/14/13	柳新強	Travel增加限制說明		△
9/13/10	B.S.Wang	To cancel UL/CUL mark		△
Date	Name	Description		No.
Drawn	Checked	Approved	SCI BOM No.	Model Name
柳新強	符明強	符明強	1831226	PUSH SWITCH
08/20/13	9/25-13	9/25-13	Customer No.	Model No.
		Unit	mm	R13-508A2-05
Shin Chin Industrial Co., Ltd.				Rev.
				3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Shin Chin:](#)

[R13-508A2-05](#)