
Test Voltage Range	5V~30V DC
Insulation Resistance	DC 500V 100M Ω Min
Dielectric Strength	AC 1500V 1 Second
Operating Temperature	-0°C~+40°C
Voltage Tolerance	±0.2V DC



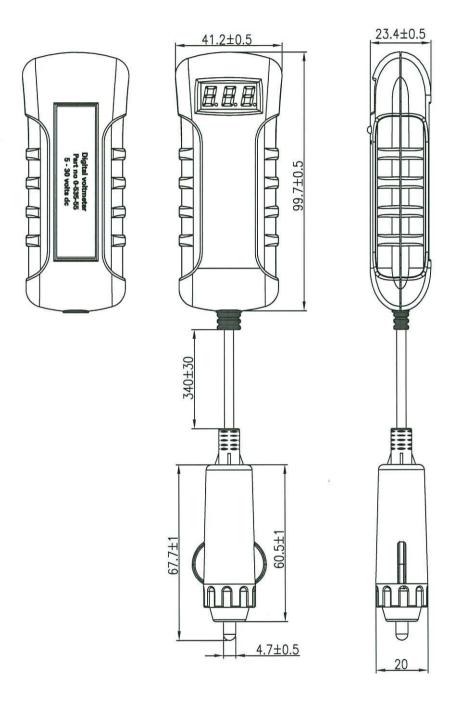

for 泉耀 only

								\triangle	
									7
Date	Name	Description						NC)
Drawn	Checked	Approved	SCI BOM No.	1520313		Model Name	Battery Tester		
方婷鳳		AT	Customer No.	112-R8-124AP		Model No.	R8-124A	·P	REV.
02/15/'11			Unit	mm	Shin Chin Industrial Co., Ltd			Ltd.	0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Shin Chin:

R8-124AP