

Power

## Flanged Resistor 20 Watts, 100Ω



#### Features:

- DC 4.0 GHz
- 20 Watts
- BeO Ceramic
- Non-Nichrome Resistive
  Element
- Low VSWR
- 100% Tested

### **General Specifications**

| Resistive Element | Thick film                         |
|-------------------|------------------------------------|
| Substrate         | Beryllium oxide ceramic            |
| Cover             | Alumina Ceramic                    |
| Mounting Flange   | Copper, Nickel plated per QQ-N-290 |
| Lead(s):          | 99.9% pure silver (.006 thick)     |


### **Electrical Specifications**

| Resistance Range: | 100 ohms, ± 5% |
|-------------------|----------------|
| Frequency Range;  | DC – 4.0 GHz   |
| Power:            | 20 Watts       |
| Capacitance:      | 1.2 pF Typical |

**Note:** Tolerance is  $\pm 0.010$ ", unless otherwise specified. Designed to meet of exceed applicable portions of MIL-E-5400. Operating temperature is -55°C to 150°C (see chart for derating temperatures). All dimensions in inches.

Specifications subject to change with out notice.

#### Outline Drawing

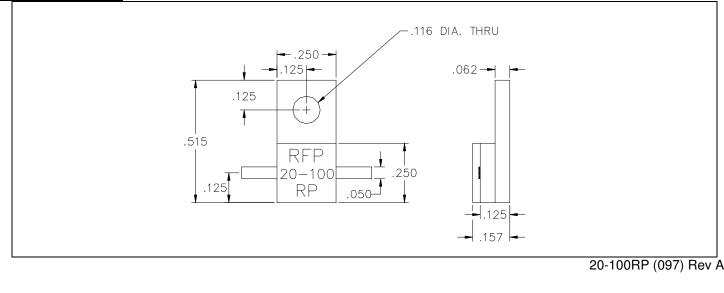






USA/Canada: Toll Free: Europe:

(315) 432-8909 (800) 544-2414 +44 2392-232392

# Model 20-100RP




**RF Power** 

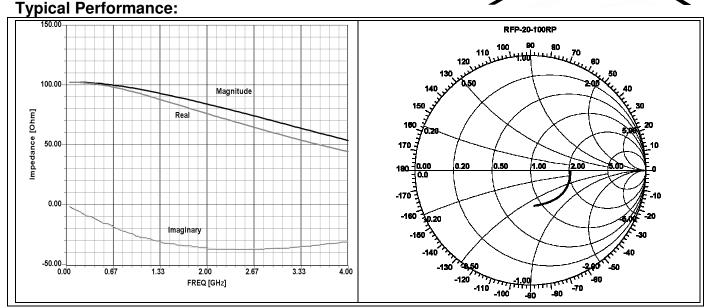

#### **Power De-rating:**

#### **Mounting Footprint and Procedure:**

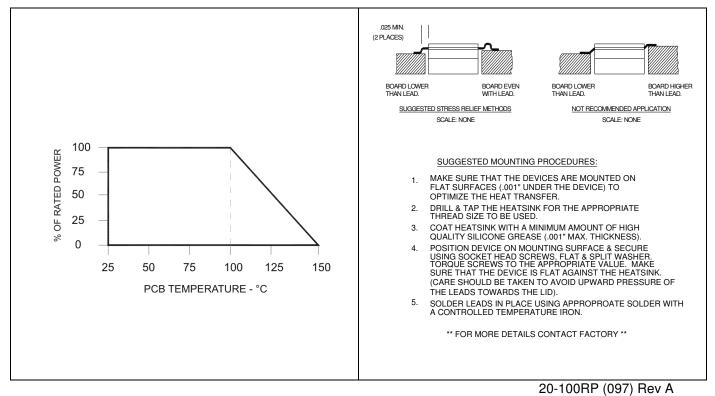

USA/Canada: Toll Free: Europe: (315) 432-8909 (800) 544-2414 +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.



# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Anaren: 20-100RP-S 20-100RP