





Features:

- DC 2.0 GHz
- 250 Watts
- BeO Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

Flanged Resistor 250 Watts, 100Ω

General Specifications

Resistive Element Thick film

Substrate Beryllium oxide ceramic

Cover Alumina Ceramic

Mounting Flange Copper, Nickel plated per QQ-N-290

Lead(s): 99.9% pure silver (.006 thick)

Electrical Specifications


Resistance Range:100 ohms, $\pm 5\%$ Frequency Range;DC -2.0 GHzPower:250 WattsCapacitance:3.3 pF Typical

Note: Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet of exceed applicable portions of MIL-E-5400. Operating temperature is -55 $^{\circ}$ C to 150 $^{\circ}$ C (see chart for derating temperatures).

All dimensions in inches.

Specifications subject to change with out notice.

Outline Drawing

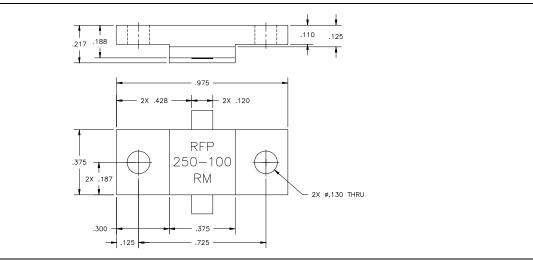

250-100RM (097) Rev A






Available on Tape and Reel For Pick and Place Manufacturing.


USA/Canada: (315) 432-8909 Toll Free: (800) 544-2414 Europe: +44 2392-232392





Typical Performance:

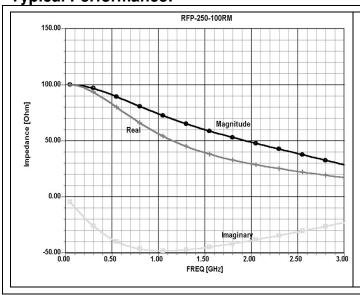


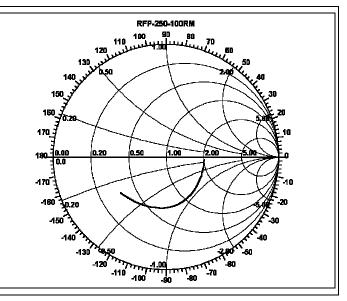

Power De-rating:

100 75 GB 50 8 0 25 50 75 100 125 150 PCB TEMPERATURE - °C

Mounting Footprint and Procedure:

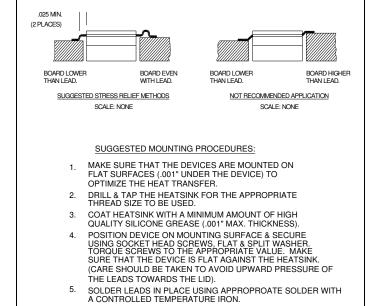

** FOR MORE DETAILS CONTACT FACTORY **

250-100RM (097) Rev A

USA/Canada: Toll Free: Europe: (315) 432-8909 (800) 544-2414 +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Anaren: 250-100RM