

#### Features:

- DC 4.0 GHz
- 5 Watts
- BeO Ceramic
- Non-Nichrome Resistive
  Element
- Low VSWR
- 100% Tested
- RoHS Compliant


Resistive Element	Thick film
Substrate	Beryllium oxide ceramic
Terminals	Thick film silver

## **Electrical Specifications**

Resistance Range:	50 ohms, ± 2%
Frequency Range;	DC – 4.0 GHz
Power:	5 Watts
VSWR	1.25:1 DC – 4.0 GHz

**Note:** Tolerance is  $\pm 0.010$ ", unless otherwise specified. Designed to meet of exceed applicable portions of MIL-E-5400. Operating temperature is -55°C to 150°C (see chart for derating temperatures). All dimensions in inches.

Specifications subject to change with out notice.

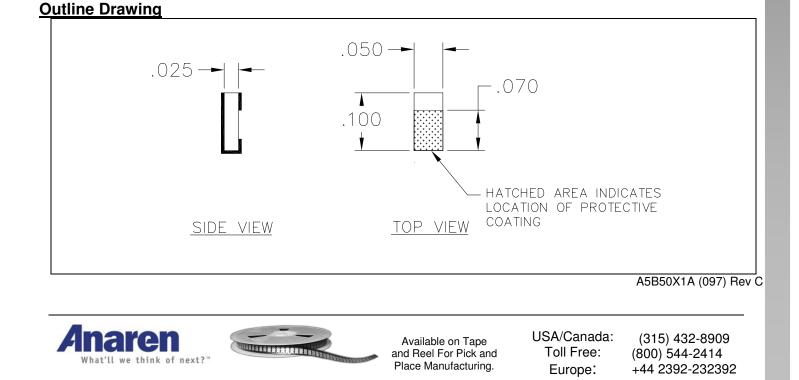


# Model A5B50X1A





### **Typical Performance:**

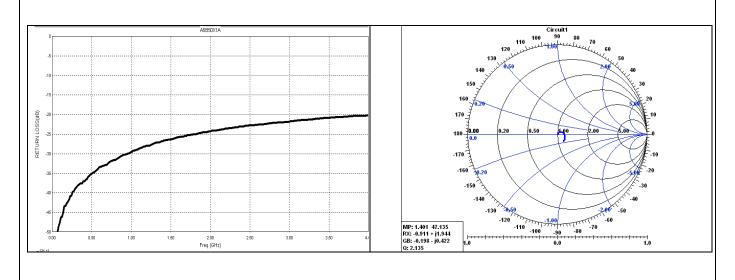

#### **Power De-rating:**

#### .025 MIN. (2 PLACES) BOARD LOWER THAN LEAD. BOARD EVEN BOARD LOWER THAN LEAD. BOARD HIGHER WITH LEAD. THAN LEAD. SUGGESTED STRESS RELIEF METHODS NOT RECOMMENDED APPLICATION SCALE: NONE SCALE: NONE SUGGESTED MOUNTING PROCEDURES: 100 % OF RATED POWER MAKE SURE THAT THE DEVICES ARE MOUNTED ON 1. FLAT SURFACES (.001" UNDER THE DEVICE) TO 75 OPTIMIZE THE HEAT TRANSFER. 50 2. DRILL & TAP THE HEATSINK FOR THE APPROPRIATE THREAD SIZE TO BE USED. COAT HEATSINK WITH A MINIMUM AMOUNT OF HIGH QUALITY SILICONE GREASE (.001" MAX. THICKNESS). 3. 25 POSITION DEVICE ON MOUNTING SURFACE & SECURE USING SOCKET HEAD SCREWS, FLAT & SPLIT WASHER. TORQUE SCREWS TO THE APPROPRIATE VALUE. MAKE 0 4. 25 50 75 100 125 150 SURE THAT THE DEVICE IS FLAT AGAINST THE HEATSINK. (CARE SHOULD BE TAKEN TO AVOID UPWARD PRESSURE OF PCB TEMPERATURE - °C THE LEADS TOWARDS THE LID). SOLDER LEADS IN PLACE USING APPROPROATE SOLDER WITH A CONTROLLED TEMPERATURE IRON. 5. \*\* FOR MORE DETAILS CONTACT FACTORY \*\*

A5B50X1A (097) Rev C

USA/Canada: Toll Free: Europe: (315) 432-8909 (800) 544-2414 +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.



### **Mounting Footprint and Procedure:**

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Anaren: A5B50X1A