

Xinger

Ultra Low Profile 1008 Balun
50Ω to 200Ω Balanced

Description:

The B0110E50200AHF is a low profile sub-miniature balanced to unbalanced transformer designed for differential inputs and output locations on next generation digital TV chipsets in an easy to use surface mount package. The B0110E50200AHF is ideal for high volume manufacturing and is higher performance than traditional wire wound Baluns. The B0110E50200AHF has an unbalanced port impedance of 50Ω and 200Ω balanced port impedance. This transformation enables single ended signals to be applied to differential ports on modern semiconductors. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The B0110E50200AHF is available on tape and reel for pick and place high volume manufacturing.


Detailed Electrical Specifications:

Specifications subject to change without notice.




| Features: | Parameter | ROOM (25°C) | | | | | | Unit |
|--|---------------------------|-------------|------|------|------|------|------|---------|
| | | Min. | Typ. | Max | Min. | Typ. | Max | |
| <ul style="list-style-type: none"> 50 – 1450 MHz (IL 2dB BW) 85-1300 MHz (IL 1dB BW) 0.83 mm Height Profile 50 Ohm to 2 x 100 Ohm Excellent CMRR (30dB typical) Surface Mountable Tape & Reel Non-conductive Top Surface RoHS Compliant Halogen Free | Frequency | 50 | | 1450 | 85 | | 1300 | MHz |
| | Unbalanced Port Impedance | | 50 | | | 50 | | Ohm |
| | Balanced Port Impedance | | 200 | | | 200 | | Ohm |
| | Return Loss | 8 | 9.8 | | 11 | 12.3 | | dB |
| | Insertion Loss* | | 2.2 | 2.5 | | 1.2 | 1.5 | dB |
| | Amplitude Balance | | 0.4 | 1 | | 0.4 | 1 | dB |
| | Phase Balance | | 5.6 | 8 | | 2.6 | 4 | Degrees |
| | CMRR | | 26 | | | 30 | | dB |
| | Power Handling | | | 0.5 | | | 0.5 | Watts |
| | Operating Temperature | -55 | | +85 | -55 | | +85 | °C |

*Insertion Loss stated at room temperature (Insertion Loss is approximately 0.15 dB higher at +85 °C). All performances stated for recommended operation with external circuitry.







Outline Drawing:

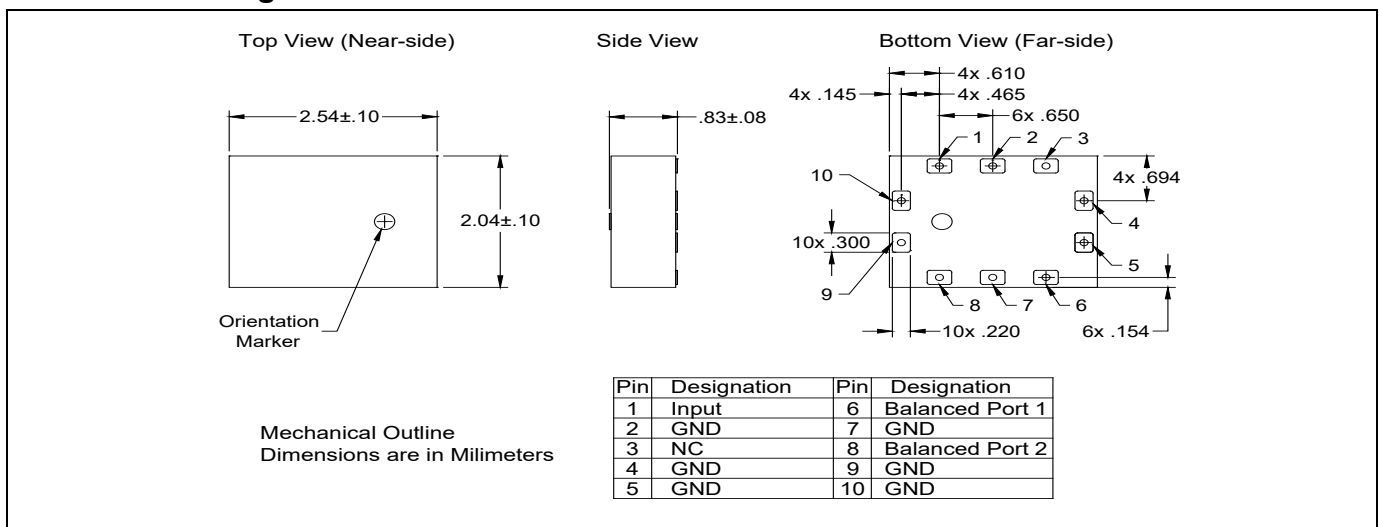

Typical Performance with Two External 220pF Capacitors (test/specification condition)

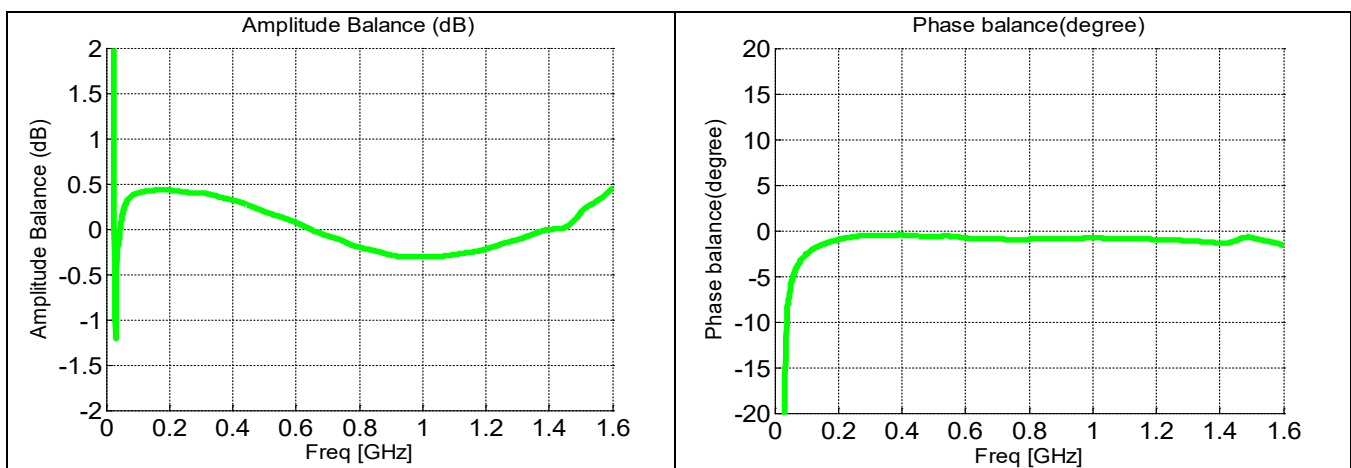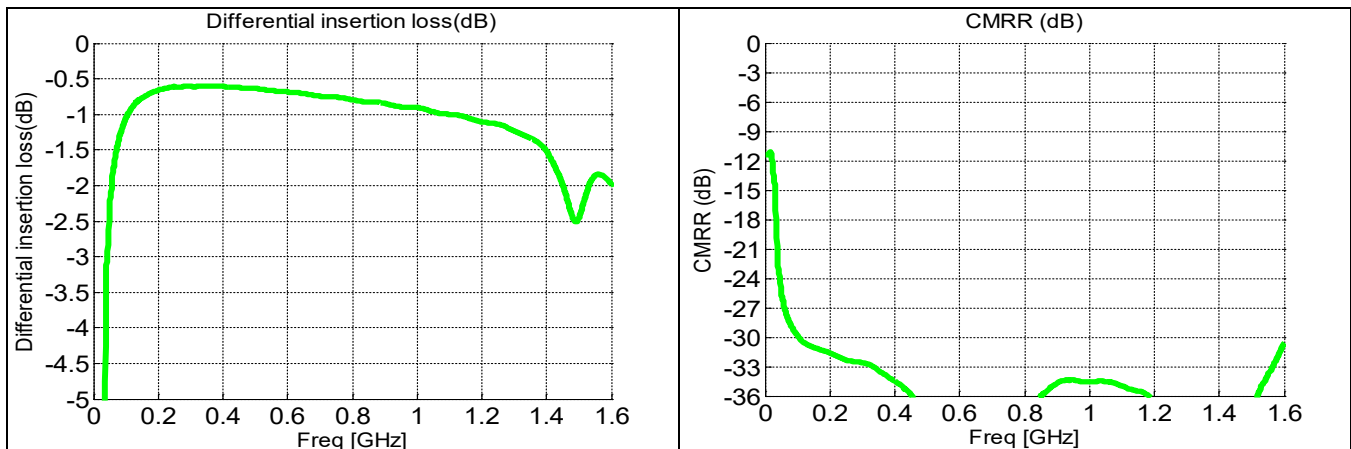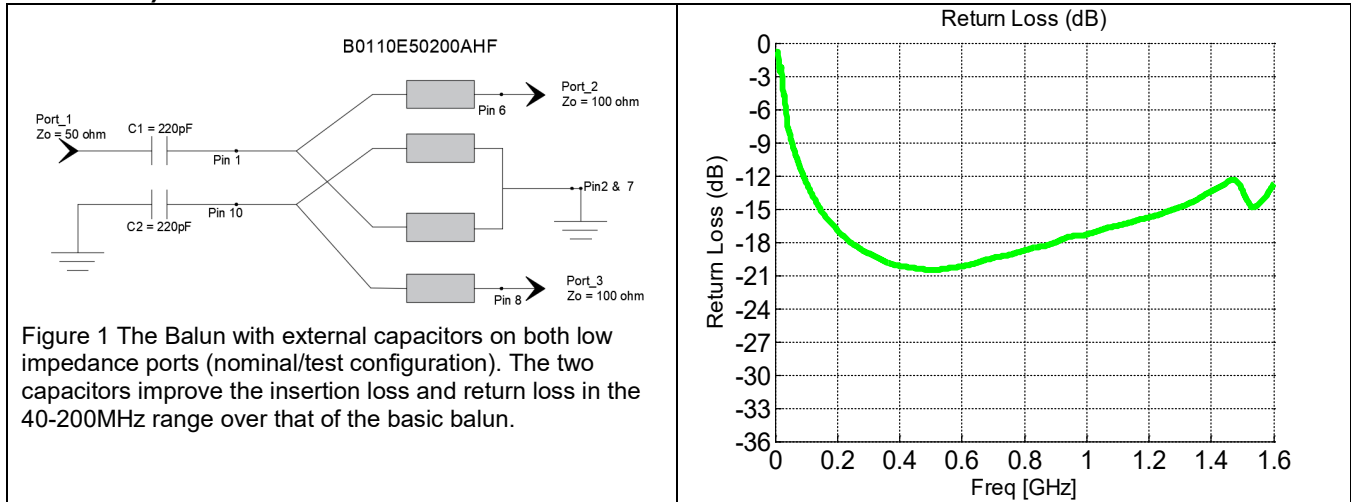

Typical Performance with no External Components

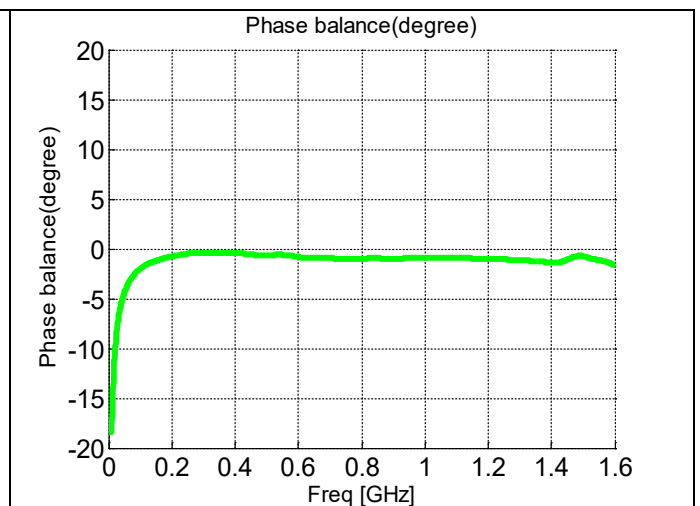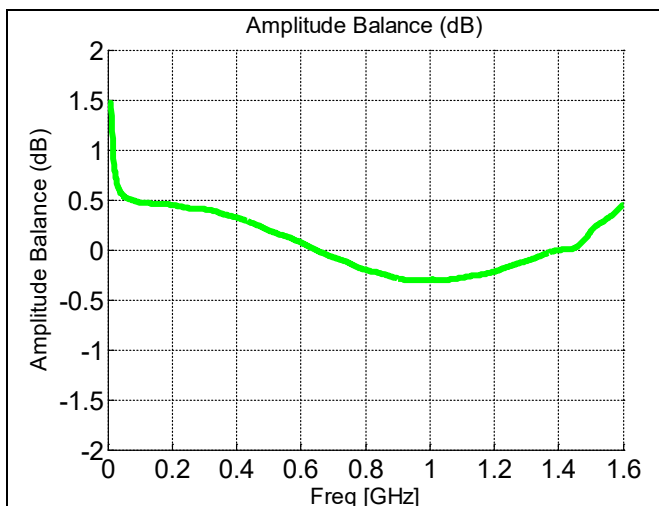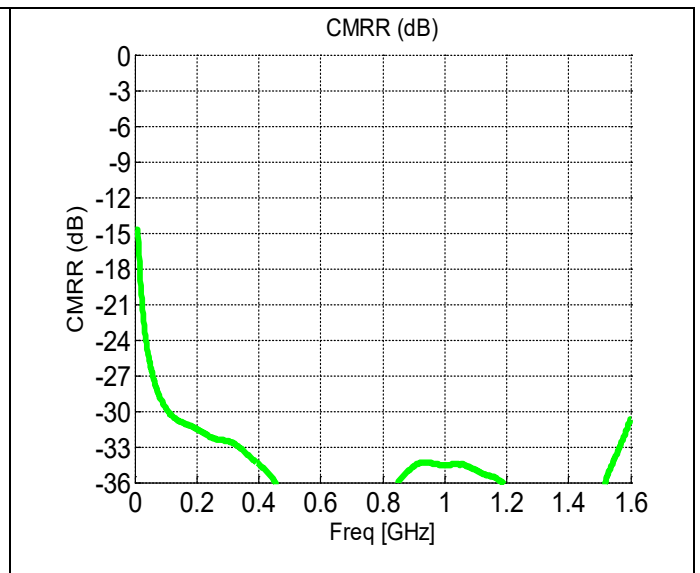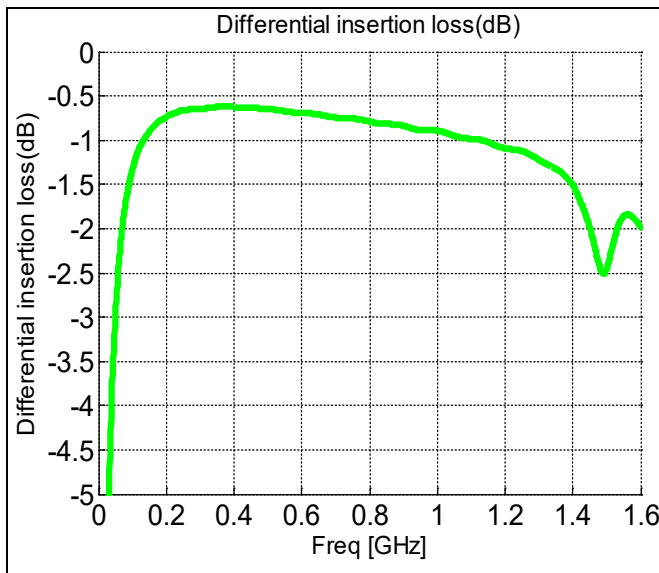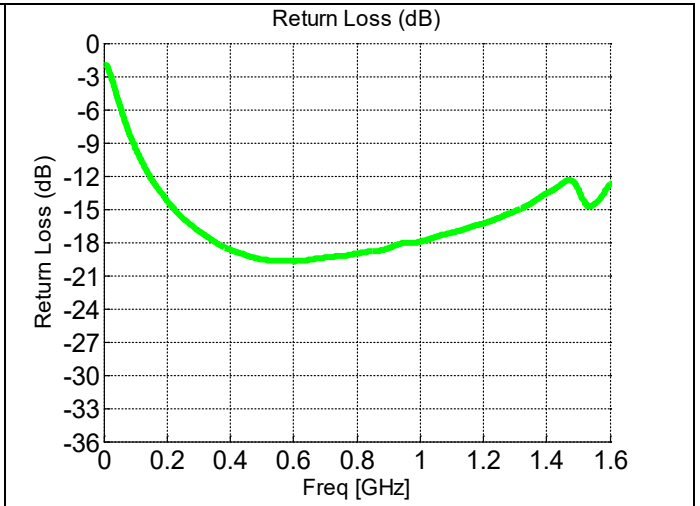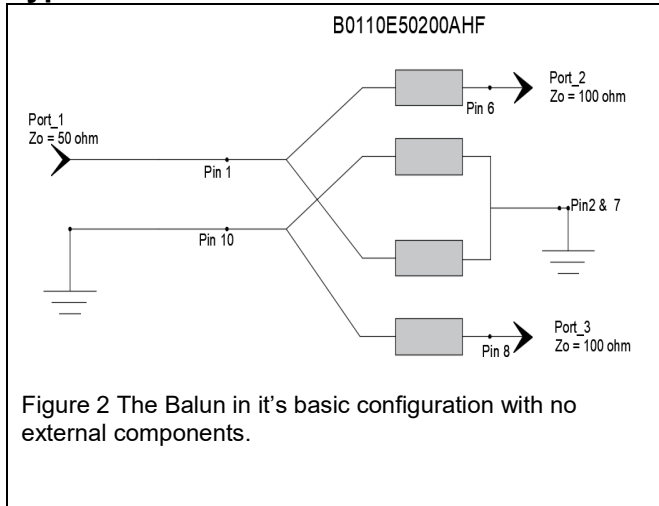

Distortion Considerations:

This balun does NOT contain any ferrite materials and are as such distortion free. Very, very low levels of distortion can arise from dissimilar metals on the contact pads of the part (Cu-Ni-Au) and from inter-metallic contaminations within the part


Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites, which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

To supply common mode voltage offset to the analog-to-digital converter, DC blocking capacitors are needed at the balanced port (pins 6 & 8).


An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thickness as well as varying pick and place equipment tolerances. In addition, two external 0402 capacitors must be mounted in locations C1 and C2 shown in the figure below to get the performance specified in the datasheet.

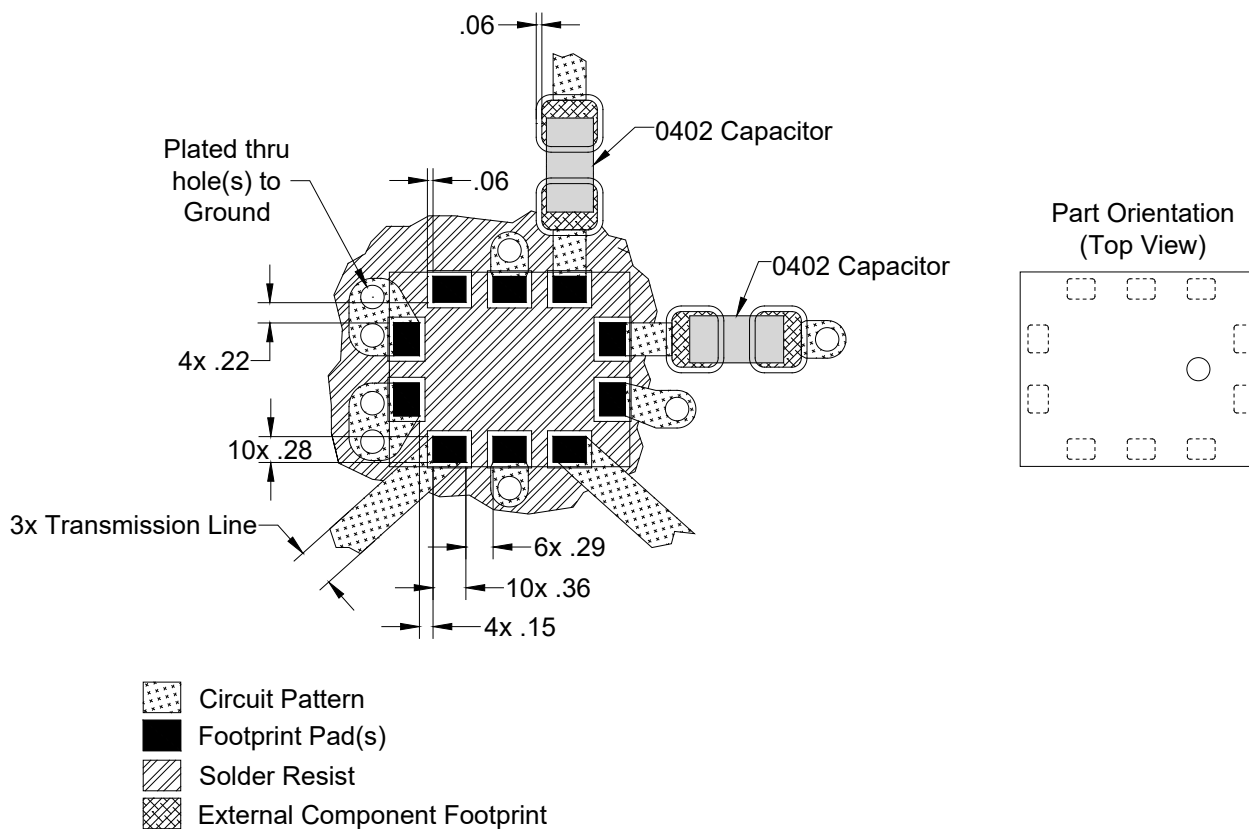

Dimensions are in millimeters

Packaging and Ordering Information:

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel.

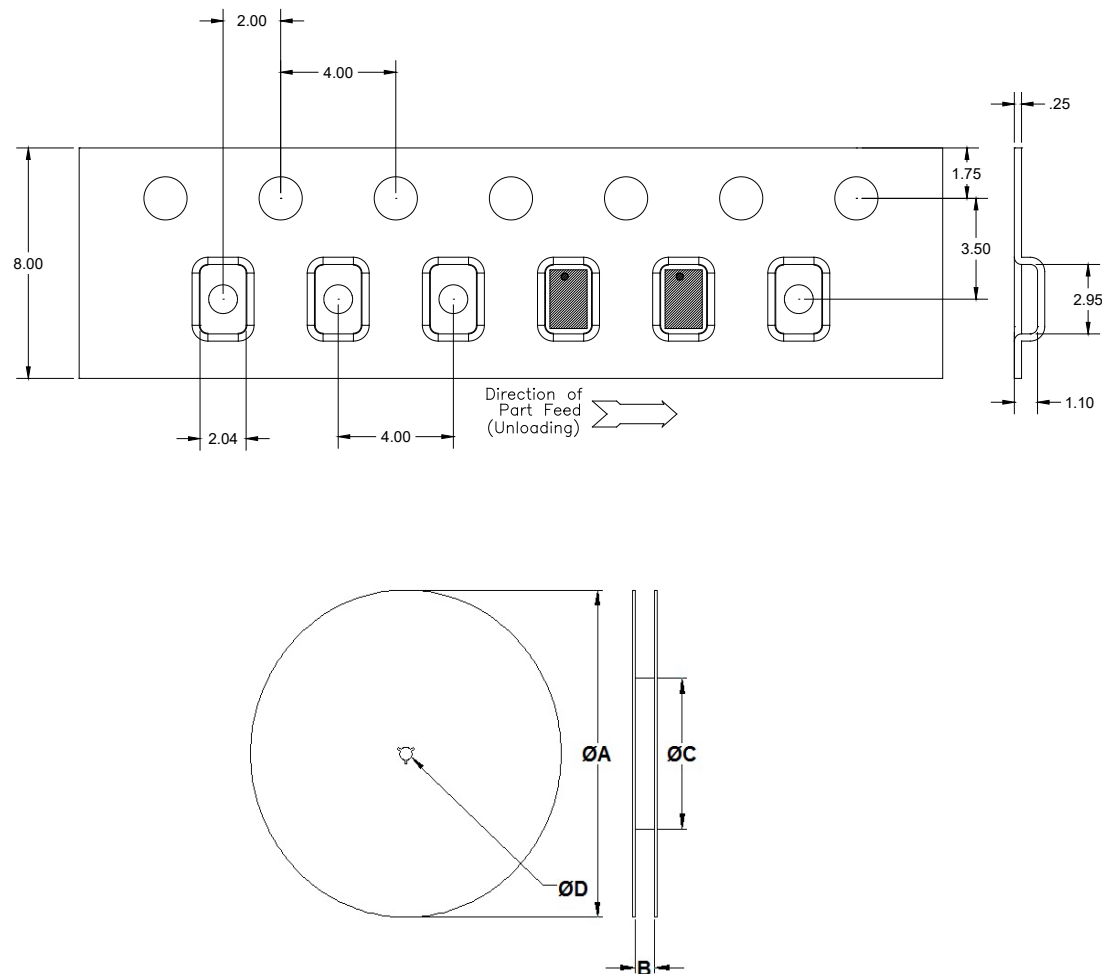

| TABLE 1 | |
|-------------------------------|---------------|
| REEL DIMENSIONS (inches [mm]) | |
| ØA | 13.0 [330.0] |
| B | .315 [8.0] |
| ØC | 7.146 [181.5] |
| ØD | 0.512 [13.0] |

Contact us:
rf&s_support@ttm.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TTM Technologies:](#)

[B0110E50200AHF](#)