

# APPROVAL SHEET

**WR10X(W)**

**$\pm 1\%$ ,  $\pm 5\%$**

Thick film Technology

General purpose chip resistors

Size 1210

## FEATURE

1. High reliability and stability
2. Reduced size of final equipment
3. Lower assembly costs
4. Higher component and equipment reliability
5. RoHS compliant and Lead free products

## APPLICATION

- Consumer electrical equipment
- Automotive application
- EDP, Computer application
- Telecom application

## DESCRIPTION

The resistors are constructed in a high grade ceramic body (aluminum oxide). Internal metal electrodes are added at each end and connected by a resistive paste that is applied to the top surface of the substrate. The composition of the paste is adjusted to give the approximate resistance required and the value is trimmed to nominated value within tolerance which controlled by laser trimming of this resistive layer.

The resistive layer is covered with a protective coat. Finally, the two external end terminations are added. For ease of soldering the outer layer of these end terminations is Tin (lead free) alloy.

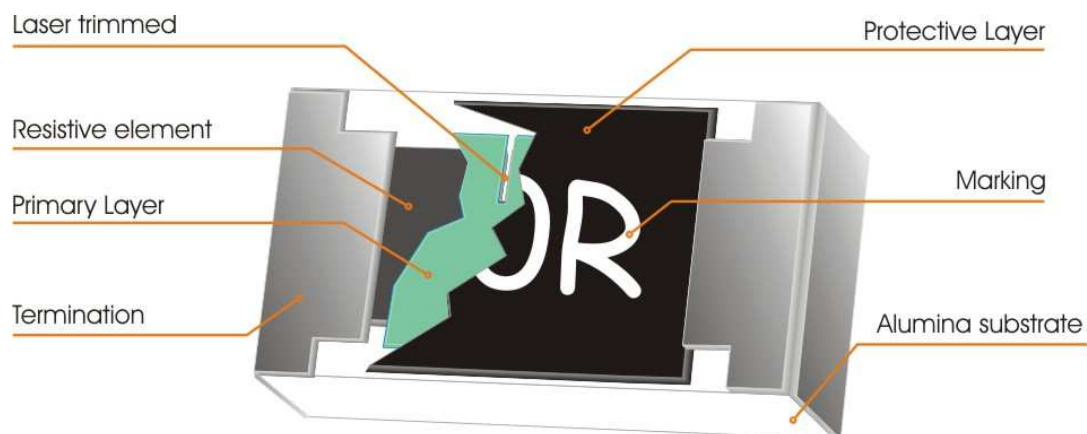


Fig 1. Construction of Chip-R

**QUICK REFERENCE DATA**

| Item  | General Specification  |
|---|--|
| Series No.  | WR10X(W)   |
| Size code   | 1210 ( 3225 )  |
| Resistance Tolerance                                  | $\pm 1\%$ ( E96/E24 ), $\pm 5\%$ ( E24 )   |
| Resistance Range                                      | Jumper, $1\Omega \sim 10M\Omega$ ( E96+E24 series)   |
| TCR (ppm/°C)<br>-55°C ~ +155°C                        | $> 10R, \leq \pm 100 \text{ ppm/}^\circ\text{C}$<br>$1R \sim 10R, \leq \pm 200 \text{ ppm/}^\circ\text{C}$ |
| Max. dissipation at $T_{\text{amb}}=70^\circ\text{C}$ | 1/3 W ( 0.33 W )   |
| Max. Operation Voltage (DC or RMS)                    | 200V   |
| Max. Overload Voltage (DC or RMS)                     | 400V   |
| Climatic category                                     | 55/155/56  |

|                       |             |
|-----------------------|-------------|
| Type                  | WR10X       |
| Power Rating At 70C   | 1/3 W       |
| Resistance            | Max. 50mR   |
| Rated Current         | 2.5 A       |
| Peak Current          | 6 A         |
| Operating Temperature | -55C ~ 155C |

Note :


- This is the maximum voltage that may be continuously supplied to the resistor element, see "IEC publication 60115-8"
- Max. Operation Voltage : So called RCWV (Rated Continuous Working Voltage) is determined by

$$\text{RCWV} = \sqrt{\text{Rated Power} \times \text{Resistance Value}} \text{ or Max. RCWV listed above, whichever is lower.}$$

**DIMENSIONS(unit : mm)**

| Part No | WR10X              |
|---------|--------------------|
| L       | $3.10 \pm 0.10$    |
| W       | $2.60 \pm 0.10$    |
| Tt      | $0.50 \pm 0.20$    |
| Tb      | $0.50 \pm 0.20$ *1 |
| T       | $0.55 \pm 0.10$    |

\*1 original 0.45+/-0.20

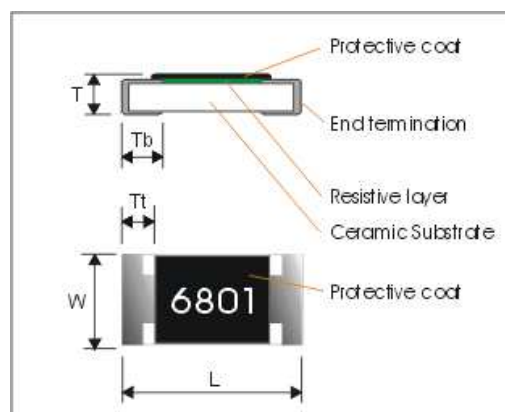

## MARKING

### 3-digits marking ( $\pm 5\%$ )

Each resistor is marked with a three digits code on the protective coating to designate the nominal resistance value.

### 4-digits marking ( $\pm 1\%$ )

Each resistor is marked with a four digits code on the protective coating to designate the nominal resistance value.

### Example

| RESISTANCE       | 90 $\Omega$ | 100 $\Omega$ | 6800 $\Omega$ | 47000 $\Omega$ |
|------------------|-------------|--------------|---------------|----------------|
| 4-digits marking | 90R0        | 1000         | 6801          | 4702           |
| 3-digits marking | -           | 101          | 682           | 473            |


## FUNCTIONAL DESCRIPTION

### Product characterization

Standard values of nominal resistance are taken from the E96 & E24 series for resistors with a tolerance of  $\pm 1\%$ ,  $\pm 5\%$ . The values of the E24/E96 series are in accordance with "IEC publication 60063".

### Derating

The power that the resistor can dissipate depends on the operating temperature; see Fig.2

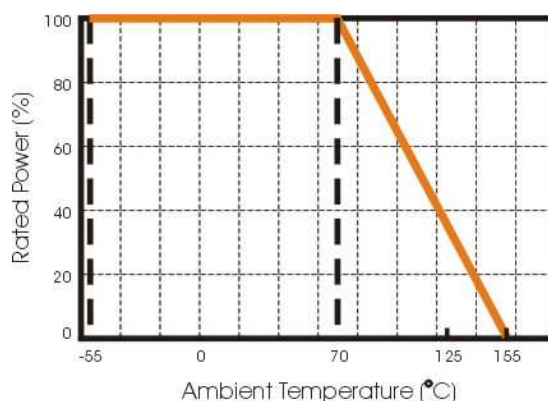

**Figure 2** Maximum dissipation in percentage of rated power as a function of the ambient temperature

## MOUNTING

Due to their rectangular shapes and small tolerances, Surface Mountable Resistors are suitable for handling by automatic placement systems.

Chip placement can be on ceramic substrates and printed-circuit boards (PCBs).

Electrical connection to the circuit is by individual soldering condition.

The end terminations guarantee a reliable contact.

## SOLDERING CONDITION

The robust construction of chip resistors allows them to be completely immersed in a solder bath of 260°C for 10 seconds. Therefore, it is possible to mount Surface Mount Resistors on one side of a PCB and other discrete components on the reverse (mixed PCBs).

Surface Mount Resistors are tested for solderability at 235°C during 2 seconds. The test condition for no leaching is 260°C for 30 seconds. Typical examples of soldering processes that provide reliable joints without any damage are given in Fig 3.

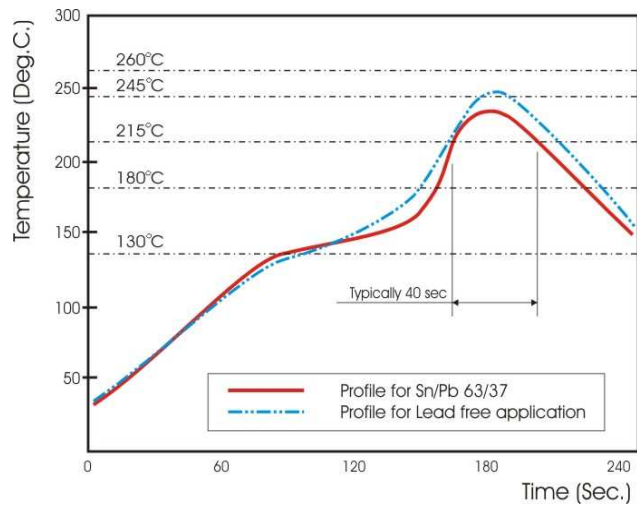


Fig 3. Infrared soldering profile for Chip Resistors

## CATALOGUE NUMBERS

The resistors have a catalogue number starting with .

| WR10       | X   | 4702   | F  | T                          | L                              |
|------------|---|--|--|----------------------------|--------------------------------|
| Size code  | Type code   | Resistance code  | Tolerance  | Packaging code             | Termination code               |
| WR10: 1210 | <b>X :</b><br>5%: 1R ~ 10M<br>1%: 10R ~ 1M<br><b>W:</b><br>1%: < 10R; > 1M0 | <b>5%, E24:</b> 2 significant digits followed by no. of zeros<br>100Ω = 101_<br>10KΩ = 103<br><b>1% E24+E96:</b> 3 significant digits followed by no. of zeros<br>102Ω =1020<br>37.4KΩ =3742<br>220Ω =2200 | <b>J: ± 5%</b><br><b>F: ± 1%</b><br><b>P: Jumper</b> | <b>T: 7" Reeled taping</b> | <b>L = Sn base (lead free)</b> |

■ Reeled tape packaging : 8mm width paper taping 5000pcs per 7" reel.

## TEST AND REQUIREMENTS(JIS C 5201-1 : 1998)

The tests are carried out in accordance with IEC publication 68, "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and under standard atmospheric conditions according to IEC 68-1, subclause 5.3, unless otherwise specified.

Temperature: 15°C to 35°C.

Relative humidity: 45% to 75%.


Air pressure: 86kPa to 106 kPa (860 mbar to 1060 mbar).

| TEST  | PROCEDURE / TEST METHOD   | REQUIREMENT   |        |
|---|---|---|--------|
|   |   | Resistor  | 0Ω     |
| DC resistance<br><b>Clause 4.5</b>                                | DC resistance values measured at the test voltages specified below :<br><10Ω@0.1V, <100Ω@0.3V, <1KΩ@1.0V,<br><10KΩ@3V, <100KΩ@10V, <1MΩ@25V, <10MΩ@30V  | Within the specified tolerance  | <50mΩ  |
| Temperature Coefficient of Resistance(T.C.R)<br><b>Clause 4.8</b> | Natural resistance change per change in degree centigrade.<br>$\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$ $t_1 : 20^\circ\text{C} \pm 5^\circ\text{C} - 1^\circ\text{C}$<br>$R_1$ : Resistance at reference temperature<br>$R_2$ : Resistance at test temperature | Refer to "QUICK REFERENCE DATA"   | N/a    |
| Short time overload (S.T.O.L)<br><b>Clause 4.13</b>               | Permanent resistance change after a 5second application of a voltage 2.5 times RCWV or the maximum overload voltage specified in the above list, whichever is less.   | $\Delta R/R \text{ max. } \pm(2\%+0.10\Omega)$  | <50mΩ  |
| Resistance to soldering heat(R.S.H)<br><b>Clause 4.18</b>         | Un-mounted chips completely immersed for 10±1second in a SAC solder bath at 260°C ±5°C  | $\Delta R/R \text{ max. } \pm(1\%+0.05\Omega)$<br>no visible damage   | <50mΩ  |
| Solderability<br><b>Clause 4.17</b>                               | Un-mounted chips completely immersed for 2±0.5 second in a SAC solder bath at 235°C ±5°C  | 95% coverage min., good tinning and no visible damage   |        |
| Temperature cycling<br><b>Clause 4.19</b>                         | 30 minutes at -55°C±3°C, 2~3 minutes at 20°C±5°C-1°C, 30 minutes at +155°C±3°C, 2~3 minutes at 20°C±5°C-1°C, total 5 continuous cycles  | $\Delta R/R \text{ max. } \pm(1\%+0.05\Omega)$  | < 50mΩ |
| Damp Heat (Load life in humidity)<br><b>Clause 4.24</b>           | 1000 +48/-0 hours, loaded with RCWV or Vmax in humidity chamber controller at 40°C±2°C and 90~95% relative humidity, 1.5hours on and 0.5 hours off  | 10Ω≤R<1MΩ :<br>$\Delta R/R \text{ max. } \pm(3\%+0.10\Omega)$<br>R<10Ω, R≥1MΩ :<br>$\Delta R/R \text{ max. } \pm(5\%+0.10\Omega)$ | < 50mΩ |
| Load Life (Endurance)<br><b>Clause 4.25</b>                       | 1000+48/-0 hours; loaded with RCWV or Vmax in chamber controller 70±2°C, 1.5 hours on and 0.5 hours off   | Ditto.  |        |
| Bending strength<br><b>Clause 4.33</b>                            | Resistors mounted on a 90mm glass epoxy resin PCB(FR4), bending once 3mm for 10sec.   | No visual damaged,<br>$\Delta R/R \text{ max. } \pm(1\%+0.05\Omega)$  | < 50mΩ |
| Adhesion<br><b>Clause 4.32</b>                                    | Pressurizing force: 5N, Test time: 10±1sec.   | No remarkable damage or removal of the terminations   |        |

| TEST  | PROCEDURE / TEST METHOD                               | REQUIREMENT               |    |
|---|---|---------------------------|----|
|   |   | Resistor                  | 0Ω |
| Insulation Resistance<br><b>Clause 4.6</b>        | Apply the maximum overload voltage (DC) for 1 minutes | $R \geq 10G\Omega$        |    |
| Dielectric Withstand Voltage<br><b>Clause 4.7</b> | Apply the maximum overload voltage (AC) for 1 minutes | No breakdown or flashover |    |


## PACKAGING

### Paper Tape specifications (unit :mm)

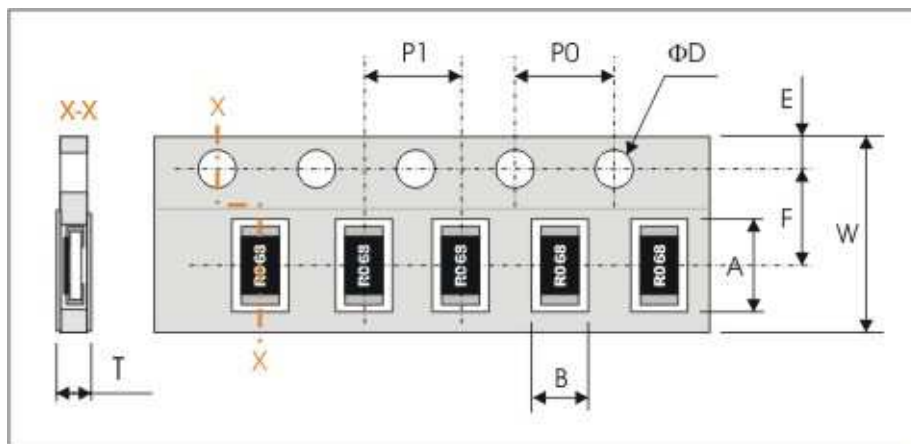

| Component Size / Series | W         | F         | E         | P0        | ΦD                                    |
|-------------------------|-----------|-----------|-----------|-----------|---------------------------------------|
| WR10X                   | 8.00±0.30 | 3.50±0.20 | 1.75±0.10 | 4.00±0.10 | Φ1.50 <sup>+0.1</sup> <sub>-0.0</sub> |
| Component Size / Series | A         | B         | P1        | T         |                                       |
| WR10X                   | 3.60±0.20 | 3.00±0.20 | 4.00±0.10 | Max. 1.0  |                                       |

### Reel dimensions

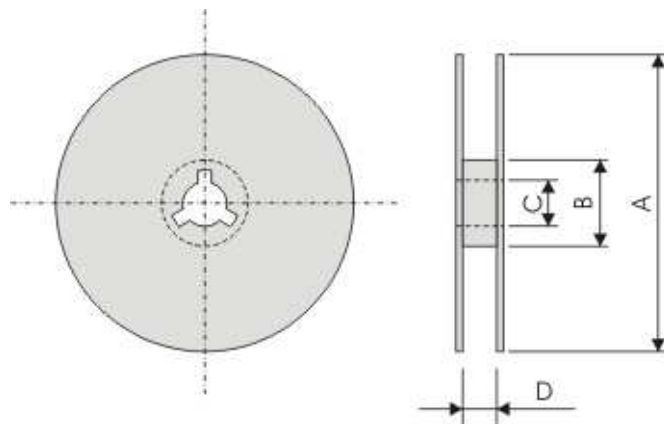

| Symbol      | A          | B         | C        | D       |
|-------------|------------|-----------|----------|---------|
| (unit : mm) | Φ178.0±2.0 | Φ60.0±1.0 | 13.0±0.2 | 9.0±0.5 |

### Taping quantity

- Chip resistors 5,000 pcs/reel



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Walsin:

[WR10X103 JTL](#) [WR10X182 JTL](#) [WR10X151 JTL](#) [WR10X2R0 JTL](#) [WR10X201 JTL](#) [WR10X1R2 JTL](#) [WR10X100](#)  
[JTL](#) [WR10X332 JTL](#) [WR10X820 JTL](#) [WR10X1503FTL](#) [WR10X242 JTL](#)