

.500 [12.7] MIN.
DIA. HOLE
THRU


FEED DIRECTION

REEL DIA.
REF.


[illegible]

<h1 style="text-align: center;">KEYSTONE ELECTRONICS CORP.</h1> <p style="text-align: center;">www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900</p>			
PART NAME <h2 style="text-align: center;">"CR2" & "AA" BATTERY CLIP, ON TAPE & REEL</h2>			
MATERIAL <h2 style="text-align: center;">AS NOTED</h2>			
FINISH <h2 style="text-align: center;">AS NOTED</h2>		DRN BY <h2 style="text-align: center;">NT</h2>	DATE <h2 style="text-align: center;">6.11.08</h2>
		APP'D <h2 style="text-align: center;">RH</h2>	SCALE <h2 style="text-align: center;">X</h2>
TOLERANCES DECIMAL $\pm .015$ [± 0.38] ANGULAR $\pm 1^\circ$ UNLESS OTHERWISE SPECIFIED	INCH [MM] <h2 style="text-align: center;">C</h2>	DWG NO. <h1 style="text-align: center;">53TR</h1>	

MOUNTING PAD LAYOUT. REQUIRED SPACING FOR 'A' OR 'AA' BATTERIES

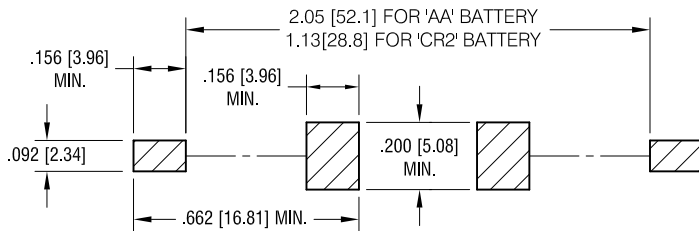

ACTUAL SIZE

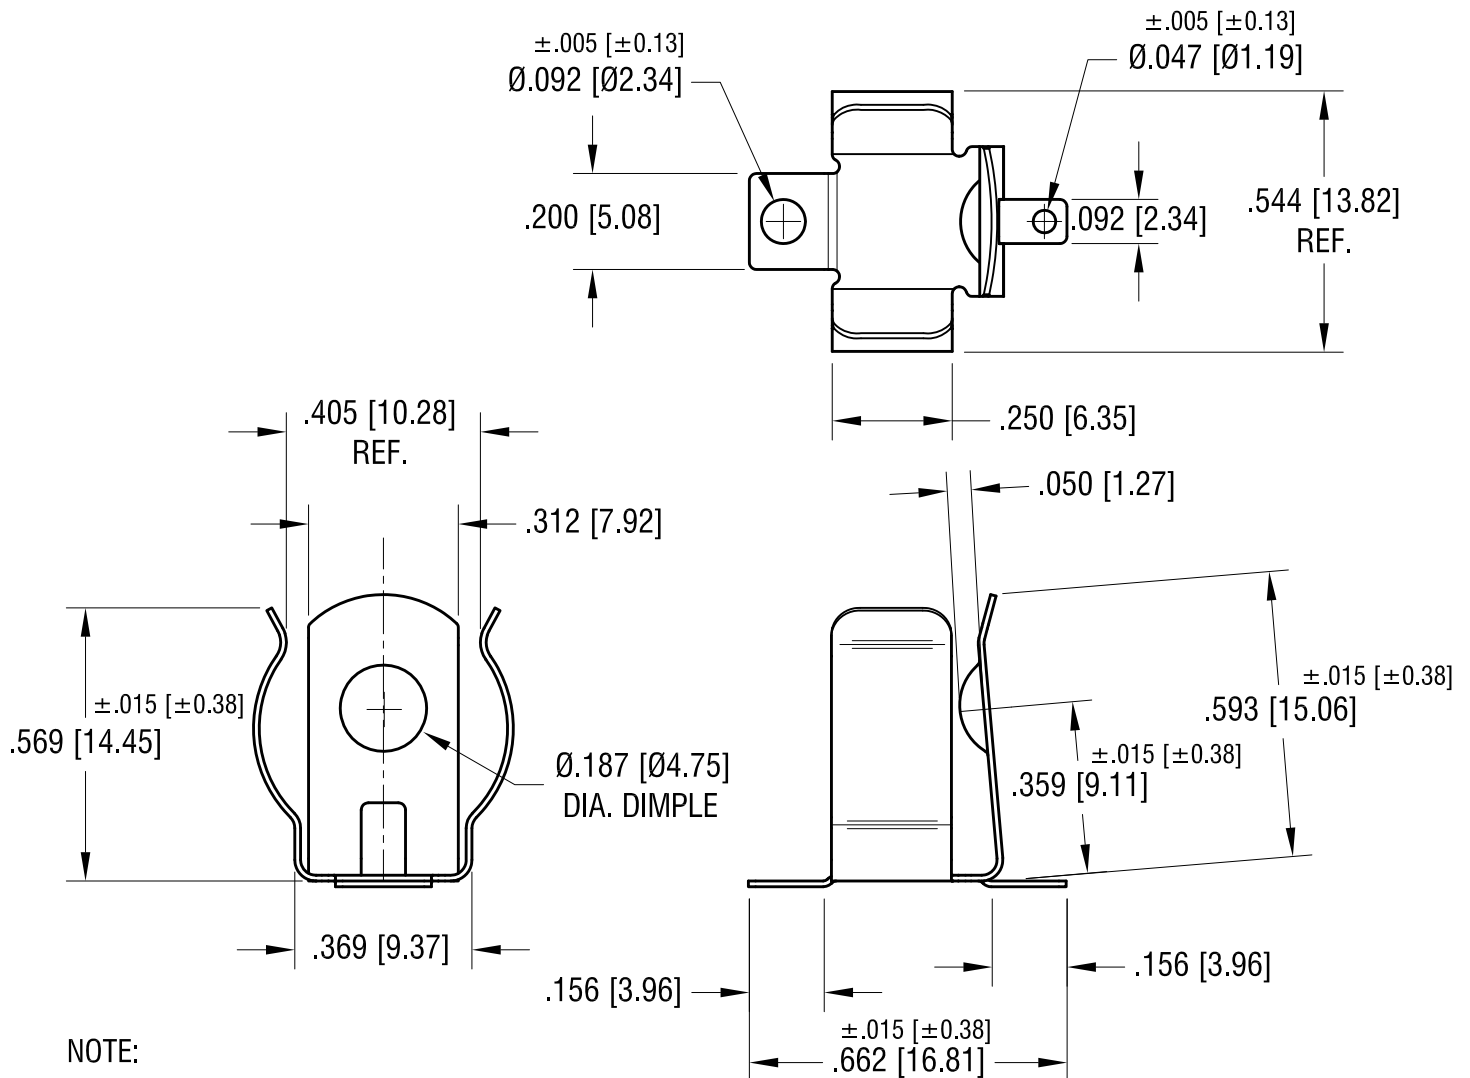

NOTE:

1. HEAT TREAT TO SPRING TEMPER.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

'CR2' & 'AA' BATTERY HOLDER

MATERIAL

.012 [0.30] TH'K ANNEALED SPRING STEEL

FINISH

TIN NICKEL PLATE

DRN BY

NT

DATE

10.16.08

APP'D

RH

SCALE

2.5X

TOLERANCES

INCH [MM]

DECIMAL

±.010 [±0.25]

ANGULAR

± 2°

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

53

10.06.16	CHANGE AS PER ECR 16-067	C
10.20.09	CHANGE AS PER ECN 99-152	B
1.05.09	CHANGE AS PER ECN 09-001	A
DATE	DESCRIPTION	REV.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[53TR](#)