
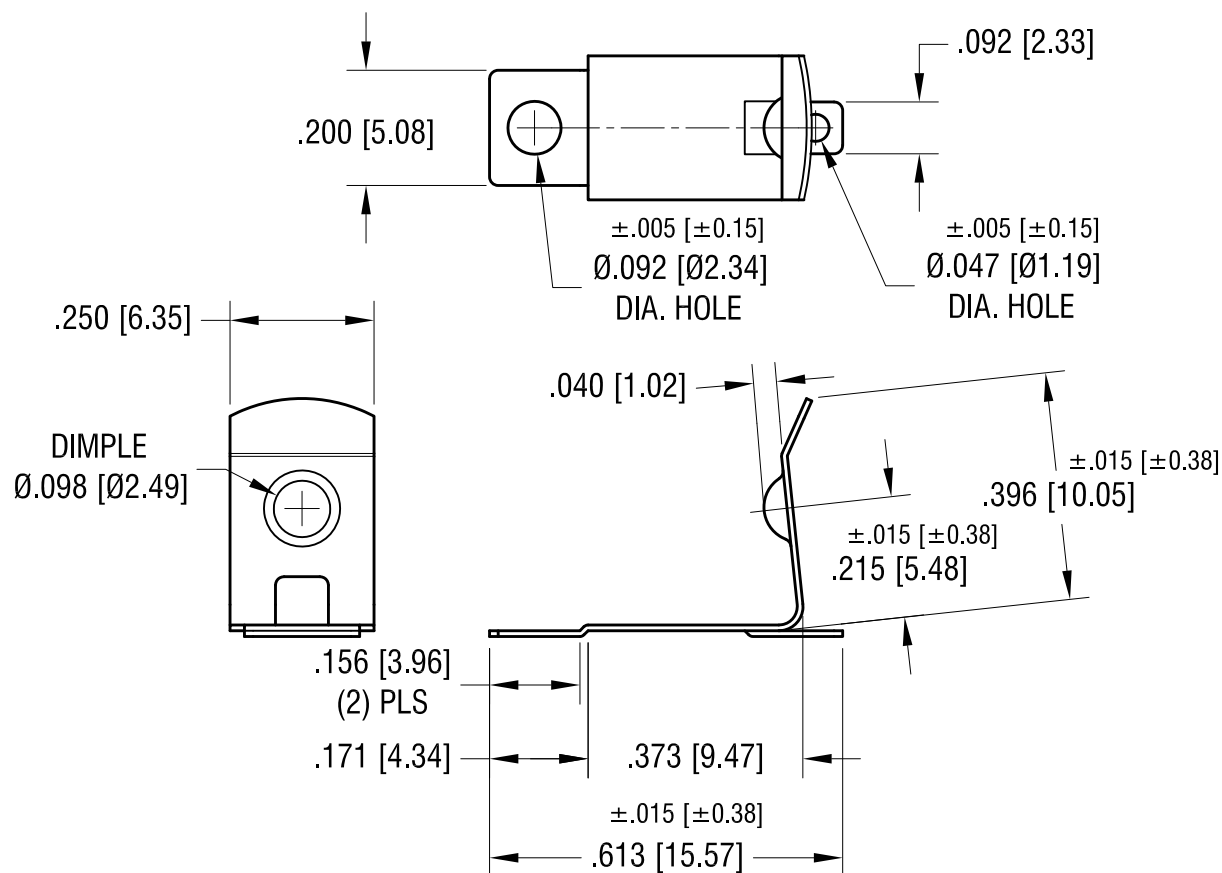


THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

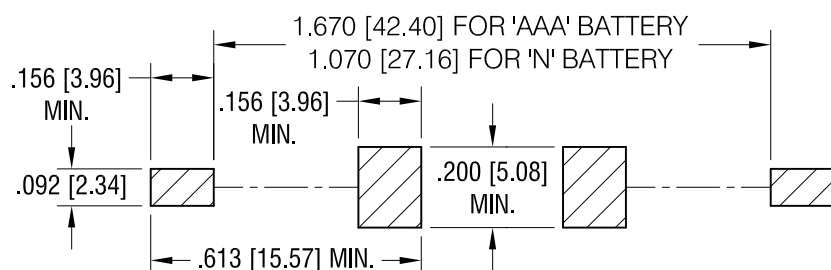

1. HEAT TREAT TO SPRING TEMPER.

1. HEAT TREAT TO SPRING TEMPER.			<div>KEYSTONE ELECTRONICS CORP.</div> <div>www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900</div>			
			PART NAME			
			'AAA' SMT BATTERY CLIP			
			MATERIAL			
5.31.17	CHANGE AS PER ECR 17-030	B	.010 [0.25] TH'K ANNEALED SPRING STEEL			
3.13.14	1.67 WAS 1.700 LAYOUT FOR AAA 1.070 WAS 1.100 LAYOUT FOR N CHANGE AS PER ECN 14-028	A	FINISH		DRN BY	DATE
			TIN NICKEL PLATE		NT	3.30.10
					APP'D	SCALE
					LN	3X
			TOLERANCES INCH [MM]		CODE	DWG NO.
			DECIMAL ± .010 [± 0.25]		C	56
			ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED			
DATE	DESCRIPTION	REV.				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[56](#)