



| DATE | DESCRIPTION | REV. |
|---------|--|------|
| 5.23.16 | CHANGE AS PER ECN 16-060 UPDATE HOUSING | A |


FRONT SHELL









INSERTED BODY



REAR SHELL



ASSEMBLED PLUG

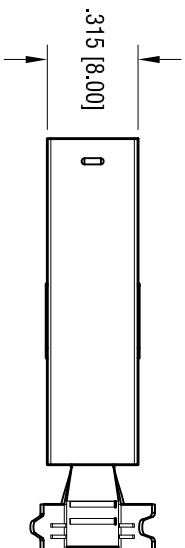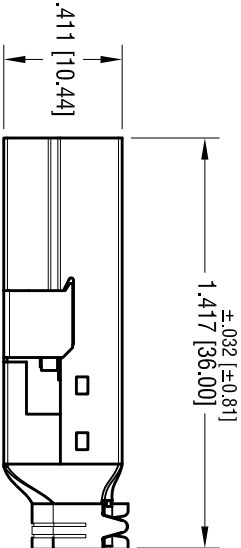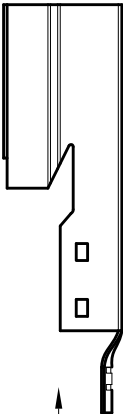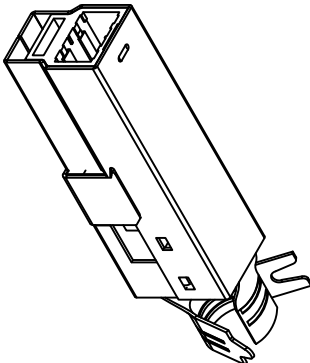

PLUG SPECIFICATIONS:

- SHELL: MAT'L- STEEL
- FINISH- NICKEL PLATE
- INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0
- CONTACT: MAT'L- PHOSPHOR BRONZE
- FINISH- GOLD FLASH OVER NICKEL

ELECTRICAL CHARACTERISTICS:

- RATED VOLTAGE: 30V (RMS)
- CONTACT CURRENT RATING: 1 Amp DC MAX.
- CONTACT RESISTANCE: 15mΩ min.
- DIELECTRIC WITHSTANDING VOLTAGE: 750V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
- OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)
- DURABILITY: 1500 CYCLES MIN.

| | | | | |
|--|--|--------------|-----------------|----------------|
| KEYSTONE ELECTRONICS CORP. www.keystone.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500 | | | | |
| PART NAME USB 3.0 TYPE B PLUG KIT | | | | |
| MATERIAL AS NOTED | | | | |
| FINISH AS NOTED | | DRN BY NT | DATE 4.07.10 | |
| TOLERANCES DECIMAL ± .010 [± 0.25] ANGULAR ± 1° | | CODE C | APP'D LN | DWG NO. 952 |
| UNLESS OTHERWISE SPECIFIED | | | | |

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[952](#)